



WRKT60015NC KNX PUSH BUTTON 1 GANG STD  
 WRKT60025NC KNX PUSH BUTTON 2 GANG STD  
 WRKT60035NC KNX PUSH BUTTON 3 GANG STD  
 WRKT60005NC KNX PUSH BUTTON BAU

WRKT60005NC  
 WRKT60015NC  
 WRKT60025NC  
 WRKT60035NC

Installation should only be carried out by a technical personnel having certificate of competency

Panasonic Electric Works Elektrik San.ve Tic. A.Ş.  
 Abdurrahmangazi Mah. Ebubekir Cad. No: 44  
 34887 Sancaktepe / İstanbul / Turkey  
 T: 0(216) 564 55 55 F: 0(216) 564 55 44

HOTLINE  
**444 8456**

ewtr.panasonic.com




### Technical Data

Programming Mode	S Mode
Power supply	21 to 32 V DC via KNX Bus
Permitted operating temperature	-5 °C... + 45°C
Current draw from bus voltage	Max 10 mA
Bus connection	Bus terminal
Type of protection	IP 20 to EN 60529
Degree of pollution	2 to IEC 60664-1
Protection class	Class III to IEC 61140
Overvoltage class	Class III to IEC 60664-1


### Product Components

• Bus Access Unit

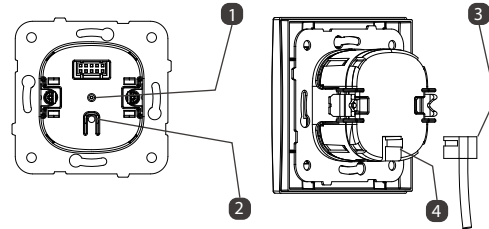


- 1- Programming LED
- 2- Programming Button
- 3- KNX Connector
- 4- KNX Connector Housing

• Electronic Group




### Dimensions


• 1 Gang KNX Switch Electronic Group




• 2 Gang KNX Switch Electronic Group



• 3 Gang KNX Switch Electronic Group



• Push Button BAU (Bus Access Unit)

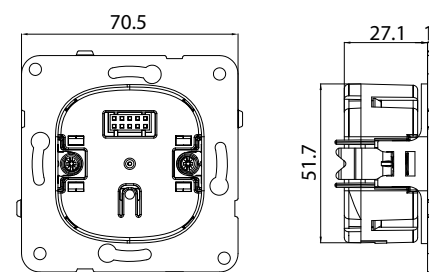

### WARNING

- Ensure that the power is cut off before the assembly of the products.
- Connection and assembly of the electrical devices should be carried out only by the technical personnel having certificate of competency.
- No responsibility is assumed for the entire of the malfunction, accident and loss arising from the assembly or interference of the persons not having the competency certificate.
- Use dry or slightly damp cloth to clean the buttons, cover and frame of the product. Never use alcohol, cologne, detergent or other similar chemicals for cleaning. Do not perform wet cleaning do not contact the product with water when the product is energized.
- In case the surface to which the product is connected is dyed, store the product by removing its cover and the frames.
- Keep the product away from the damp or wet environment during the transportation and shipping.
- It is intended for indoor use only.

### Service and Guarantee

- Warranty period starts as of the delivery date of the product and it is 2 years.
- Warranty covers the malfunctions likely to occur due to the manufacturing defects of the product and within the warranty period.
- The product including all of its parts is under warranty as a whole. If the product turns out to be defective, the consumer can use one of the following rights stipulated in Article 11 of Consumer Protection Law no. 6502;
  - a- Withdrawal from the contract
  - b- Demanding discount from sales fee
  - c- Demanding free repair,
  - d- Demanding the replacement of the sold one with a fungible one free from defects.
- In case the consumer chooses the right of free repair among those rights; the dealer is obliged to repair the product or have the product repaired without claiming any fee under the name of replaced part fee, labor cost or for any other reasons. The consumer can also use the right of free repair against the manufacturer or exporter. The dealer, manufacturer and exporter are jointly and severally liable for the usage of this right by the consumer.
- In case the consumer uses the right of free repair and if the product
  - fails within the warranty period again and
  - the maximum period required for the repair is exceeded and
  - Authorized service station, dealer, manufacturer or exporter state that it's not possible to repair the product in a report, the consumer can demand the return of the product fee, fee discount at the ratio of the defect or the replacement with the one free of defects, if possible, from the dealer. The dealer can not reject the demand of the consumer. In case this demand is not met, the dealer, manufacturer and exporter shall jointly and severally be held responsible.
- The repair period of the product can not exceed 20 business days. This period starts on the notification of the failure on the product to the authorized service station or the dealer within the warranty period and from the date of delivery of the product to the authorized service station out of warranty period. In case of not eliminating the product malfunction within 10 business days, manufacturer or importer is obliged to dedicate another product with similar characteristics to the use of the consumer until the completion of the product repair. In case the product fails within the warranty period, elapsed time is added to the warranty period.
- Usage of the product contrary to the rules stipulated in user's manual, operating out of determined voltage, current and environmental conditions, damage on the cable connection due to the user's fault and failure of the product due to the facts arising from the fire, flood, earthquake, lightning and similar disasters are not under warranty.
- The consumer can apply to the arbitration committee for consumers or the consumer court where the consumer operations are made or in the residential area for the disputes to be occurred regarding the usage of the rights arising from the warranty.
- In case the dealer doesn't provide this certificate of warranty, the consumer can apply to the General Directorate of Consumer Protection and Market Surveillance of Ministry of Customs and Trade".

654750-P

### Functional Specifications

KNX switches with up to 3 rockers and 2 LEDs per rocker. They can be used to send command to KNX system for controlling to actuators, to dimming or switch lights ON/OFF, to move blinds up-down or to save/recall light scenes. They can be configured with ETS software.

The following functions can be configured:


- Switching control
- Dimming control
- Blinds control
- Scene control
- Single button operations

Each LED can be controlled via an object, display the actual status or remain permanently on or off.

The telegram type (switching, priority, value, temperature value etc. can be configurable individually.

### Assembly

- Connect the cables as shown in the connection diagram.
  - Place the BAU (1) in the mounting box and fasten the screws of the claws (5) with an appropriate screwdriver.
  - Place the frame (2) on the BAU (1).
  - Place the electronic group (3) to BAU (1) after checking the connectors position.
  - Place the button (4) on the electronic group (3).
- NOTE: BAU (Bus Access Unit) is used common for each kind electronic groups (1,2,3 gang).

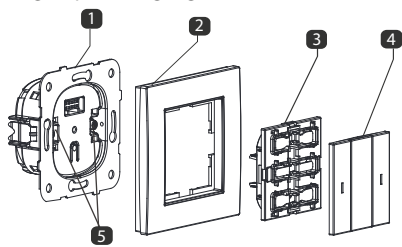

- 1) BAU (Bus Access Unit)
- 2) Frame
- 3) Electronic Group
- 4) Button
- 5) Claw Screws



## WRKT60015NC KNX PUSH BUTTON 1 GANG STD WRKT60025NC KNX PUSH BUTTON 2 GANG STD WRKT60035NC KNX PUSH BUTTON 3 GANG STD WRKT60005NC KNX PUSH BUTTON BAU

WRKT60005NC  
WRKT60015NC  
WRKT60025NC  
WRKT60035NC



Kurulum yalnızca yeterlilik sertifikası olan teknik personel tarafından yapılmalıdır.

Panasonic Electric Works Elektrik San.ve Tic. A.Ş.  
Abdurrahmangazi Mah. Ebubekir Cad. No: 44  
34887 Sancaktepe / İstanbul / Türkiye  
T: 0(216) 564 55 55 F: 0(216) 564 55 44

DANIŞMA HATTI  
**444 8456**

ewtr.panasonic.com

654750-P

### Fonksiyonel Özellikler

Ürün maksimum üç kontrol grubundan oluşur ve bu üç kontrol grubunun her birinde iki adet LED vardır. KNX anahtarları; aktüatörleri kontrol etmek için KNX sistemine komut gönderme, lambayı dim etmek veya açma / kapatma, panjurları yukarı / aşağı hareket ettirmek veya ışık senaryolarını kaydetmek / geri çağırmak için kullanılabilir. ETS yazılımı ile konfigüre edilebilirler.


Aşağıdaki fonksiyonlar ayarlanabilir:

- Anahtarlama kontrolü
- Dim kontrolü
- Panjur kontrolü
- Sahne kontrolü

Her Led bir KNX telegramı ile kontrol edilebilir veya kalıcı olarak açık / kapalı olarak ayarlanabilir. Telegram tipi (anahtarlama, öncelik, değer, sıcaklık değeri vb.) ayrı ayrı konfigüre edilebilir.

### Kurulum

- Kablo bağlantılarını bağlantı şemasında gösterildiği gibi yapınız.
  - BAU'yu (1) montaj kutusuna yerleştiriniz ve tırnak vidalarını (5) uygun bir tornavida ile sıkınız.
  - Çerçeveyi (2), BAU (1) üzerine yerleştiriniz.
  - Konnektörlerin konumunu kontrol ettikten sonra elektronik grubu (3) BAU (1) üzerine yerleştiriniz.
  - Butonu (4) elektronik grup (3) üzerine yerleştiriniz.
- NOT: BAU (Bus Access Unit) her tür elektronik gruplar için ortak kullanılabilir (1,2,3 gang).

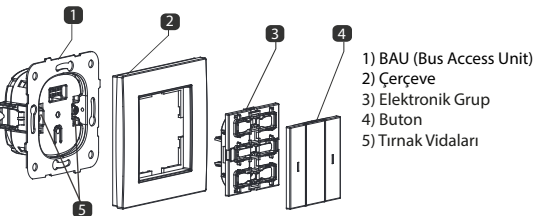


5

### Teknik Veriler

Programlama modu	S Modu
Güç kaynağı	KNX Bus Hattı 21 - 32 V DC
İzin verilen çalışma sıcaklığı	-5 °C... + 45°C
Bus geriliminden çekilen akım değeri	Maks. 10 mA
Bus bağlantısı	Bus terminali
Koruma tipi	IP 20 - EN 60529
Kirlilik derecesi	2 - IEC 60664-1
Koruma sınıfı	III - IEC 61140
Aşırı gerilim sınıfı	III - IEC 60664-1


### Ürün Komponentleri

• BAU

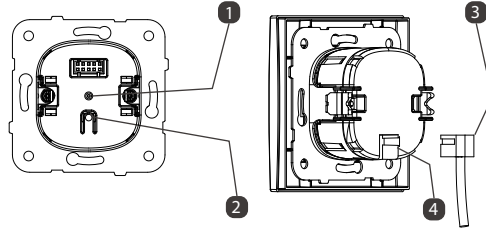

- 1- Programlama LED'i
- 2- Programlama Butonu
- 3- KNX Konnektörü
- 4- KNX Konnektör Yuvası


• Elektronik Grup




6

### Ölçüler


• 1 Gang KNX Anahtar Elektronik Grup




• 2 Gang KNX Anahtar Elektronik Grup



• 3 Gang KNX Anahtar Elektronik Grup



• Push Button BAU (Bus Access Unit)

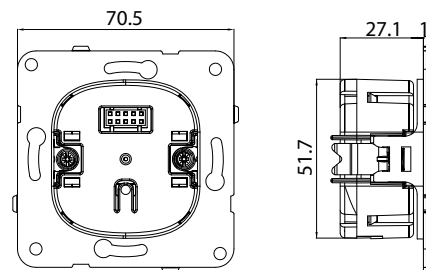

7

### UYARI

- Ürünlerin montajından önce enerjinin kesilmiş olduğundan emin olunuz.
- Elektrikli cihazların bağlantısı ve montajı yalnızca yeterlilik belgesine sahip teknik personel tarafından yapılmalıdır.
- Yeterlilik belgesine sahip olmayan kişilerin montajı ve müdahalesi sonucunda oluşabilecek arıza, kaza ve kayıpların tamamı için hiçbir sorumluluk kabul edilemez.
- Ürünlerin ekran, kapak ve çerçeve temizliğini kuru veya hafif nemli bez ile yapınız. Alkol, kolonya, deterjan vb. kimyasallar kesinlikle kullanmayınız. Ürün enerji altında iken ıslak temizlik yapmayınız ve ürünü su ile temas ettirmeyiniz.
- Taşıma ve nakliye sırasında ürünü nemli veya ıslak ortamlardan uzak tutunuz.
- Sadece iç mekan kullanımı içindir.

### Servis ve Garanti

- Garanti süresi, ürünün teslim tarihinden itibaren başlar ve süresi 2 yıldır.
- Garanti, garanti süresi içerisinde ve ürünün imalat hatalarından dolayı meydana gelebilecek arızaları kapsar.
- Ürünün bütün parçaları dahil olmak üzere, tamamı garanti kapsamındadır. Ürünün ayıplı olduğunun anlaşılması durumunda tüketici, 6502 sayılı Tüketicinin Korunması Hakkında Kanununun 11. maddesinde yer alan; a- Sözleşmeden dönme, b- Satış bedelinden indirim isteme, c- Ücretsiz onarımını isteme, d- Satılan ayıpsız bir misli ile değiştirilmesini isteme, haklarından birini kullanabilir.
- Tüketicinin bu haklardan ücretsiz onarım hakkını seçmesi durumunda satıcı; işçilik masrafı, değiştirilen parça bedeli ya da başka herhangi bir ad altında hiç bir ücret talep etmeksizin malın onarımını yapmak veya yaptırmakla yükümlüdür. Tüketici ücretsiz onarım hakkını üretici veya ithalatçıya karşı kullanabilir. Satıcı, üretici ve ithalatçı tüketicinin bu hakkını kullanmasından müteselsilen sorumludur.
- Tüketicinin, ücretsiz onarım hakkını kullanması halinde malın; - Garanti süresi içerisinde tekrar arızalanması, - Tamiri için gereken azami sürenin aşılması, - Tamirinin mümkün olmadığı için yetkili servis istasyonu, satıcı, üretici veya ithalatçı tarafından bir raporla belirlenmesi durumlarında tüketici malın bedel iadesini, ayıp oranında bedel indirimi veya imkan varsa malın ayıpsız misli ile değiştirilmesini satıcıdan talep edebilir. Satıcı, tüketicinin talebini reddedemez. Bu talebin yerine getirilmemesi durumunda satıcı, üretici ve ithalatçı müteselsilen sorumludur.
- Malın tamir süresi 20 iş gününü geçemez. Bu süre, garanti süresi içerisinde mala ilişkin arızanın yetkili servis istasyonuna veya satıcıya bildirme tarihinde, garanti süresi dışında ise malın yetkili servis istasyonuna teslim tarihinden itibaren başlar. Malın arızasının 10 iş günü içerisinde giderilememesi halinde, üretici veya ithalatçı; malın tamiri tamamlanıncaya kadar, benzer özelliklere sahip başka bir malı tüketicinin kullanımına tahsis etmek zorundadır. Malın garanti süresi içerisinde arızalanması durumunda, tamirinde geçen süre garanti süresine eklenir.
- Ürünün kullanma kılavuzunda yer alan hususlara aykırı kullanılması, belirtilen gerilim, akım ve çevre şartları dışında çalıştırılması, kablo bağlantısının kullanıcı kaynaklı zarar görmesi ve ayrıca ürünün yangın, sel, deprem, yıldırım vb. felaketlerden kaynaklanan durumlardan etkilenecek arızalanması garanti kapsamı dışındadır.
- Tüketici garantiden doğan haklarının kullanılması ile ilgili olarak çıkabilecek uyuşmazlıklarda yerleşim yerinin bulunduğu veya tüketici işleminin yapıldığı yerdeki tüketici hakem heyetine veya tüketici mahkemesine başvurabilir.
- Satıcı tarafından bu garanti belgesinin verilmemesi durumunda, tüketici Gümrük ve Ticaret Bakanlığı Tüketicinin Korunması ve Piyasa Gözetimi Genel Müdürlüğüne başvurabilir.

8