

Panasonic

THEA MODULAR CATALOGUE



Scan the QR code
and discover
our renewed website



Panasonic Thea Modular So modular, so popular!

Index

Modular Introduction



OPTIMA



SISTEMA



ULTIMA



SLENDATA

New



Thea Modular Series Designed for Different Needs

Thea Modular Series offers all the advantages of a modular system. With distinct design approaches, Thea Ultima, Thea Sistema, Thea Slenda, and Thea Optima meet a wide range of expectations through frame options of up to 7M, a broad selection of accessories, and halogen-free mounting box alternatives. Combining aesthetics and functionality, the series adds value to modern living spaces.



More
function
more design

Thea
Modular




Thea
ultima



Thea
Slenda



Thea
sistema

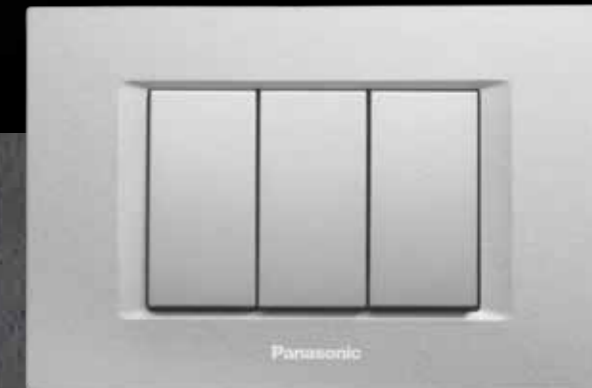


Thea
optima



Thea Modular series brings the advantages of modular systems to users. With modular mechanisms available in different forms through Thea Ultima, Thea Sistema, Thea Slenda and Thea Optima, the Thea Modular series provides freedom of choice for every living space.

Connect to the technology with modular series

Thea Modular

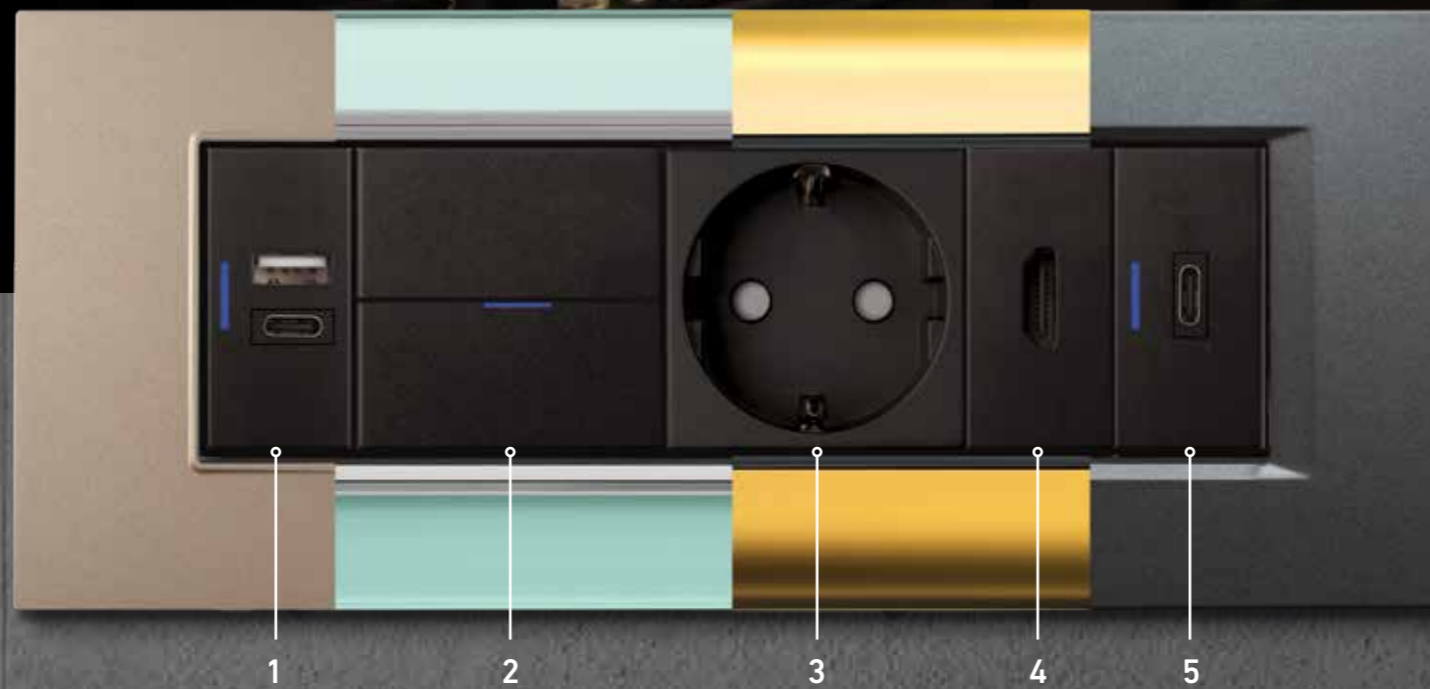

Thea Modular brings together essential power, charging, lighting, and connection solutions for contemporary interiors. From fast USB charging to lighting control and multimedia connectivity, the series is designed to simplify daily use while maintaining a clean and modern appearance.

1 Thea Modular A+C Type 5V-3A 15W Charging Socket

Thea Modular A+C Type 5V-3A 15W Charging Socket offers adapter-free charging for home, hotel, and office applications. It allows two devices to be charged simultaneously via USB-A and USB-C outputs. With its wall-mounted design and 15W total power output, it provides a practical and organized charging solution.

2 Thea Modular Universal Dimmer

Thea Modular Universal Dimmer provides flexible lighting control for different types of dimmable LED lamps. Selectable leading edge and trailing edge operating modes ensure compatibility with various load types. Adjustable minimum and maximum dim levels help achieve balanced and comfortable lighting performance.

3 Thea Modular Earthed Socket

Thea Modular Earthed Socket provides a safe and reliable power connection for residential and commercial spaces.

Its grounded design enhances electrical safety while maintaining the modern appearance of the Thea Modular series. A practical solution for everyday power requirements.

4 Thea Modular HDMI Connector

Thea Modular HDMI Connector brings comfort and order to audio and video connections in various applications. It enables easy connection to televisions, computers, or projection devices from a single wall-mounted point. By eliminating visible cables, it supports a cleaner and more organized environment.


5 Thea Modular C Type 5V-3A 18W PD Charging Socket

Thea Modular C Type 5V-3A 18W PD Charging Socket enables fast and efficient charging via a single USB-C output. With Power Delivery technology, it automatically adjusts the output according to the connected device. It eliminates the need for adapters while providing a modern and reliable charging solution.

A forward-looking perspective on modular design

Thea
Modular

Thea
sistema

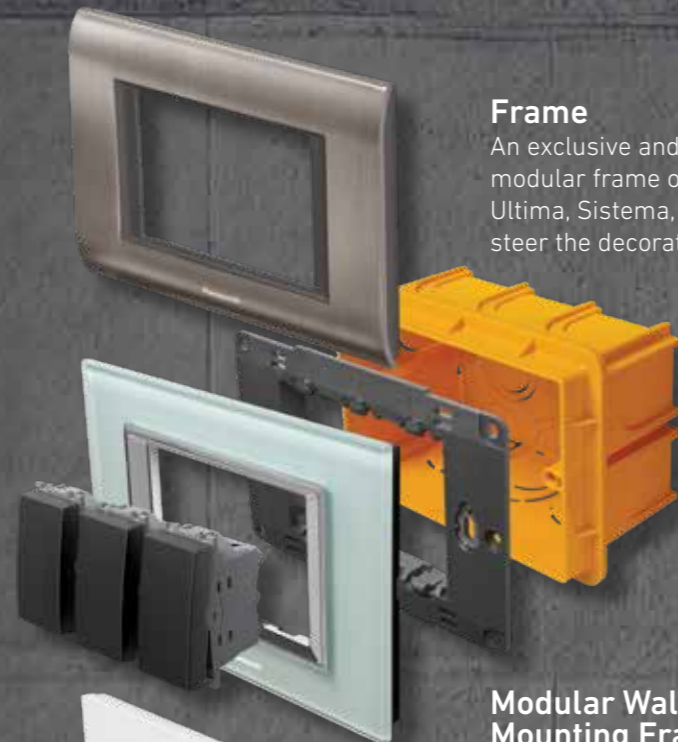

Frame
An exclusive and rich range of modular frame options provided by Ultima, Sistema, Slenda and Optima models steer the decorations.

Thea
ultima




2M Mounting Frames
Metal mounting frames ensure additional strength compared to regular mounting frames for challenging assembly conditions. Complying with drywall and flush-mounted cases, the design is developed for high-performance operation of all modular products.

Thea
optima



Modular Wallbox and Mounting Frames
Halogen-free modular boxes are suitable for concrete walls and drywall, and the compatible mounting frames ensure a flawless finish for the modular series.

2M Earthed Socket
16A, 250V double pole and earthing contact, safety shutter, screw connection.

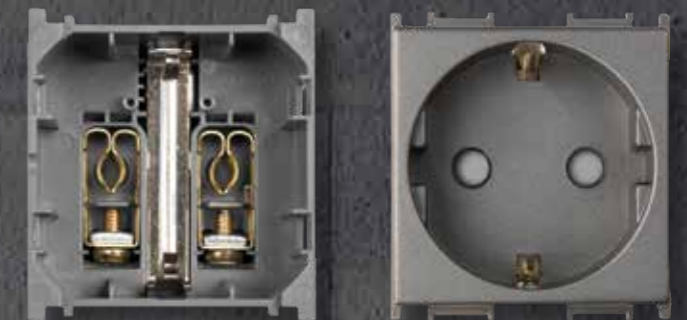


Thea
Slenda



Cover Plate / Rocker
Switching modules in different colors are combined in Italian style, offering an ideal solution for those who have difficulty choosing.

Modular Mechanism
Modular mechanisms developed for switches, sockets, TV/DATA, dimmers, and electronic applications provide maximum user satisfaction.

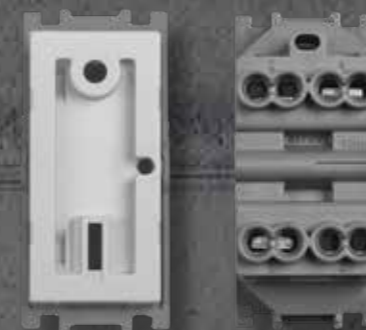

1M Switch Mechanism
Modular mechanisms with screw connection suitable for 16AX, 250V.

Thea
ultima

Chasing
your dreams



Thea Ultima brings your design vision to life with a wide range of frame colors and material options. Make room for the convenience of using switches, dimmers, sockets, TV, satellite, and data modules together within elegant, eye-catching frames.

Thea
ultima

Modular design's outstanding colors

Glass



White



Light Green



Black



Claret Red

Ultima offers white, light green, black, and claret red alternatives for those who appreciate the Italian elegance of glass.

Metallic



Gold



Chrome



Inox

Every detail shines with Ultima Metallic frames, enhancing the elegance of modern spaces.

Eloxal



Silver



Bronze



Black

Modern elegance is taking the center stage of living spaces with Ultima Eloxal frames.

Wooden



Bamboo



Walnut



Wenge

Ultima Wooden frames offering wenge, walnut, bamboo alternatives add their own warmth to all spaces.



Thea
sistema

For most impressive
decorations



Panasonic



Metropolitan life continues to steer the decorations considered for living spaces. Thea Sistema, offering the most impressive design alternatives with 14 different color options, provides the benefit of modularity in living spaces.

Designs having a voice colors above-the-line



Inox

Sistema frames reflect the power of zamak alloy and determine the preferences with the Inox option.



Inox Matt

Modular system concept of Sistema makes dreams come true with Inox Matt frames.



Chrome

Spaces gain originality and reflect the style of the owner with Sistema Chrome frames.



Chrome Matt

Sistema Chrome Matt option eliminates unnecessary details for a clean and refined look.



Una

Sistema accompanies those who believe every space should have a story with its Una frames.



Antique

Sistema Antique frames offer an elegant and inspiring option for those with refined taste.



Gold

Sistema Gold frames add a bright touch to living spaces and leave a lasting impression.



Thea
Slenda



New

The slender elegance of Thea Slenda at your fingertips.

With its minimalist lines, Thea Slenda brings a touch of sophistication to any space. Offered in seven color options, Thea Slenda frames harmonize with any interior decor and are fully compatible with Thea modular mechanisms and KNX automation switches.

With its slim yet robust structure, it offers long-lasting durability.

Feel the difference of perfect thinness with Thea Slenda!





Black



Anthracite



Metallic White



Beige




White




Dark Grey




Dore




Slim Form




Surface Integration




Material Durability



Wide Range of Color Options



Modular Compatibility



Various Size Options



Compatibility with KNX Switches



Thea
optima

Simplicity taking
the first step



Panasonic



Simplicity takes the center stage with Optima, combining various switching modules. With dimmer products, TV, satellite, data socket solutions, and sockets with safety shutters, Optima exhibits its difference.

Thea
optima

Power of colors decoration privileges



White




Beige



Metallic White



Dore



Anthracite




Dark Grey



Black

Optima reflects the elegance of modular design on everyday life with white, metallic white, beige, dore, anthracite, dark grey and black color options. Optima largely meets the expectations with modern colors for modern decorations. Each preferred Optima contributes to the happiness of its users.

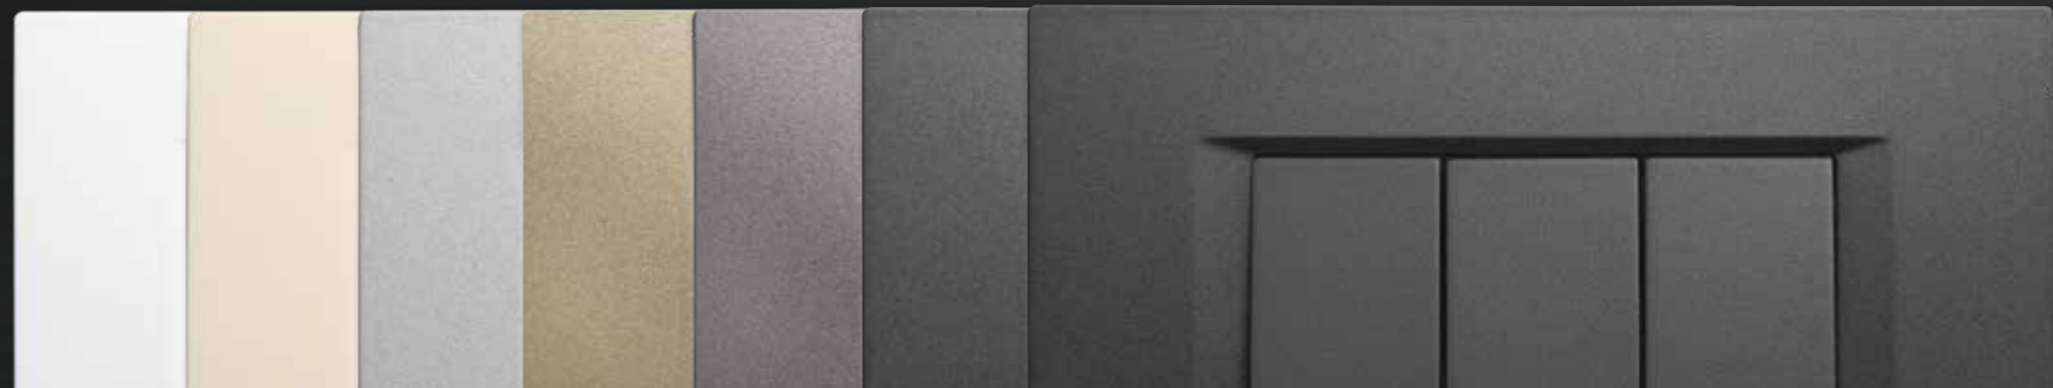


Modular SoftTouch

Naive with its design,
elegant with its texture...



Elegant touch for modular design


Panasonic Soft Touch Modular is inspired by the magnificent work "The Great Wave of Kanagawa" by Japanese artist Katsushika Hokusai and brings the nobility of art to the walls of your home with its night black, sea shell, sandstone, turquoise, and ocean color options, its soft texture and its modular structure that combines different uses. Naive in design, elegant in texture.

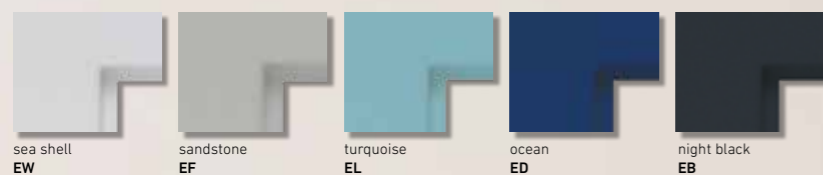

Soft Touch

Code	Frame
WVTF0840X##	Panasonic Optima Soft Touch 2M Frame Without Logo ¹
WVTF0841X##	Panasonic Optima Soft Touch 1/3M Frame Without Logo ¹
WVTF0842X##	Panasonic Optima Soft Touch 2/3M Frame Without Logo ¹
WVTF0843X##	Panasonic Optima Soft Touch 3M Frame Without Logo ¹
WVTF0844X##	Panasonic Optima Soft Touch 4M Frame Without Logo ¹
WVTF0847X##	Panasonic Optima Soft Touch 7M Frame Without Logo ¹
WVTF0848X##	Panasonic Optima Soft Touch 2X2M Frame Without Logo ¹
WVTF0849X##	Panasonic Optima Soft Touch 3X2M Frame Without Logo ¹
WVTF0850X##	Panasonic Optima Soft Touch 4X2M Frame Without Logo ¹

Code	Button Covers
WVTR1001Y##	Panasonic Modular Soft Touch Switch Cover 1M ¹
WVTR1002Y##	Panasonic Modular Soft Touch Illuminated Switch Cover 1M ¹
WVTR1003Y##	Panasonic Modular Soft Touch Two Way Switch Cover 1M ¹
WVTR1004Y##	Panasonic Modular Soft Touch Illuminated Two-Way Switch Cover 1M ¹
WVTR1005Y##	Panasonic Modular Soft Touch Intermediate Switch Cover 1M ¹
WVTR1006Y##	Panasonic Modular Soft Touch Illuminated Intermediate Switch Cover 1M ¹
WVTR1013Y##	Panasonic Modular Soft Touch Double One Way Push Button Cover 1M ¹
WVTR1016Y##	Panasonic Modular Soft Touch Push Button with Light Symbol Cover 1M ¹
WVTR1017Y##	Panasonic Modular Soft Touch Illuminated Push Button with Light Symbol Cover 1M ¹



Color Codes



EB – Night
EW – Sea Shell
ED – Ocean
EF – Sandstone
EL – Turquoise

X, Y and Z indicate the packaging type:
1: X (OPP Bag)
4: Y (Plastic Bag)
9: Z (Separator)

¹ Available Colors: EB, ED, EF, EL, EW
² Available Colors: EB, ED, EF, EL
³ Available Colors: EW

Soft Touch

Code	Button Covers
WVTR1018Y##	Panasonic Modular Soft Touch Push Button with Key Symbol Cover 1M ¹
WVTR1019Y##	Panasonic Modular Soft Touch Push Button with Bell Symbol Cover 1M ¹
WVTR1020Y##	Panasonic Modular Soft Touch Illuminated Push Button with Bell Symbol Cover 1M ¹
WVTR1021Y##	Panasonic Modular Soft Touch Illuminated Push Button with Key Symbol Cover 1M ¹
WVTR1023Y##	Panasonic Modular Soft Touch Blind Control Switch Cover 1M ¹
WVTR1045Y##	Panasonic Modular Soft Touch Blind Control Push Button Cover 1M ¹
WVTR1402Y##	Panasonic Modular Soft Touch Single Phone Socket RJ11 CAT3 Cover 1M ²
WVTR1404Y##	Panasonic Modular Soft Touch Data Socket RJ45 CAT5 Cover 1M ²
WVTR1418Y##	Panasonic Modular Soft Touch Israel-English Type Phone Socket Cover 1M ¹
WVTR1701Y##	Panasonic Modular Soft Touch Blank Cover 1M ¹
WVTR1702Y##	Panasonic Modular Soft Touch Cable Outlet Cover 1M ¹
WVTR2001Y##	Panasonic Modular Soft Touch Switch Cover 2M ¹
WVTR2002Y##	Panasonic Modular Soft Touch Illuminated Switch Cover 2M ¹
WVTR2003Y##	Panasonic Modular Soft Touch Two-Way Switch Cover 2M ¹
WVTR2004Y##	Panasonic Modular Soft Touch Illuminated Two-Way Switch Cover 2M ¹
WVTR2005Y##	Panasonic Modular Soft Touch Intermediate Switch Cover 2M ¹
WVTR2006Y##	Panasonic Modular Soft Touch Illuminated Intermediate Switch Cover 2M ¹
WVTR2016Y##	Panasonic Modular Soft Touch Push Button with Light Symbol Cover 2M ¹
WVTR2017Y##	Panasonic Modular Soft Touch Illuminated Push Button with Light Symbol Cover 2M ¹
WVTR2018Y##	Panasonic Modular Soft Touch Push Button with Key Symbol Cover 2M ¹
WVTR2019Y##	Panasonic Modular Soft Touch Push Button with Bell Symbol Cover 2M ¹
WVTR2020Y##	Panasonic Modular Soft Touch Push Button with Bell Symbol Cover 2M ¹
WVTR2021Y##	Panasonic Modular Soft Touch Illuminated Push Button with Key Symbol Cover 2M ¹
WVTR2023Y##	Panasonic Modular Soft Touch Blind Control Switch Cover 2M ¹
WVTR2045Y##	Panasonic Modular Soft Touch Blind Control Push Button Cover 2M ¹
WVTR2578Y##	Panasonic Modular Soft Touch Energy Saver Cover Plate 2M (Ultima) ¹
WVTR2721Y##	Panasonic Modular Soft Touch Energy Saver Cover Plate 2M (Op-Sis) ¹
WVTR3721Y##	Panasonic Modular Soft Touch Energy Saver Cover Plate 3M ¹

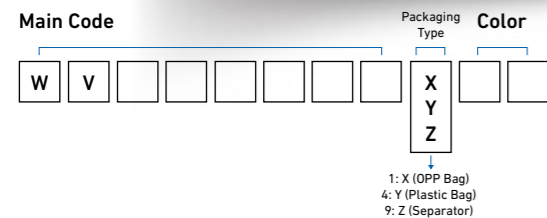

Color Codes



EB – Night
EW – Sea Shell
ED – Ocean
EF – Sandstone
EL – Turquoise

X, Y and Z indicate the packaging type:
1: X (OPP Bag)
4: Y (Plastic Bag)
9: Z (Separator)

¹ Available Colors: EB, ED, EF, EL, EW
² Available Colors: EB, ED, EF, EL
³ Available Colors: EW

Soft Touch

Code	Complete Units (Mechanism + Button/Cover)
WVTT1001X/Z##	Panasonic Modular Soft Touch Switch Mechanism + Button 1M ¹
WVTT1002X/Z##	Panasonic Modular Soft Touch Illuminated Switch Mechanism + Cover 1M ¹
WVTT1003X/Z##	Panasonic Modular Soft Touch Two Way Switch Mechanism + Button 1M ¹
WVTT1004X/Z##	Panasonic Modular Soft Touch Illuminated Two Way Switch Mechanism + Button 1M ¹
WVTT1005X/Z##	Panasonic Modular Soft Touch Intermediate Switch Mechanism + Button 1M ¹
WVTT1006X/Z##	Panasonic Modular Soft Touch Illuminated Intermediate Switch Mechanism + Button 1M ¹
WVTT1007X/Z##	Panasonic Modular Soft Touch Two Pole Switch Mechanism + Button 1M 16AX ¹
WVTT1008X/Z##	Panasonic Modular Soft Touch Illuminated Two Pole Switch Mechanism + Button 1M 16AX ¹
WVTT1016X/Z##	Panasonic Modular Soft Touch Push Button with Light Symbol Mechanism + Button 1M ¹
WVTT1017X/Z##	Panasonic Modular Soft Touch Illuminated Push Button with Light Symbol Mechanism + Button 1M ¹
WVTT1019X/Z##	Panasonic Modular Soft Touch Push Button with Bell Symbol Mechanism + Button 1M ¹
WVTT1020X/Z##	Panasonic Modular Soft Touch Illuminated Push Button with Bell Symbol Mechanism + Button 230V 1M ¹
WVTT1023X/Z##	Panasonic Modular Soft Touch Blind Control Switch Mechanism + Button 1M ¹
WVTT1025Y/Z##	Panasonic Modular Soft Touch Emergency Push Button with Cord Mechanism + Cover 1M ¹
WVTT1045X/Z##	Panasonic Modular Soft Touch Blind Control Push Button Mechanism + Button 1M ¹
WVTT1046X/Z##	Panasonic Modular Soft Touch 24V Illuminated Push Button with Bell Symbol Mechanism + Button 1M ¹
WVTT1211Y/Z##	Panasonic Modular Soft Touch Socket with Safety Shutter Mechanism + Cover 1M ¹
WVTT1225Y/Z##	Panasonic Modular Soft Touch Euro-American Socket Mechanism + Cover 1M ¹
WVTT1230Y/Z##	Panasonic Modular Soft Touch Euro-American Socket with Safety Shutter Mechanism + Cover 1M ¹
WVTT1231Y/Z##	Panasonic Modular Soft Touch USB A+A Charging Socket Mechanism + Cover 1M 5V-2A ¹
WVTT1232Y/Z##	Panasonic Modular Soft Touch Italian Socket with Safety Shutter Mechanism + Cover 1M ¹
WVTT1402Y/Z##	Panasonic Modular Soft Touch Single Phone Socket RJ11 CAT3 Mechanism + Cover 1M ¹
WVTT1404Y/Z##	Panasonic Modular Soft Touch Data Socket RJ45 CAT5 Mechanism + Cover 1M ¹
WVTT1405Y/Z##	Panasonic Modular Soft Touch Data Socket RJ45 CAT6 Mechanism + Cover 1M ¹
WVTT1418Y/Z##	Panasonic Modular Soft Touch Israel-English Type Phone Socket 1M ¹

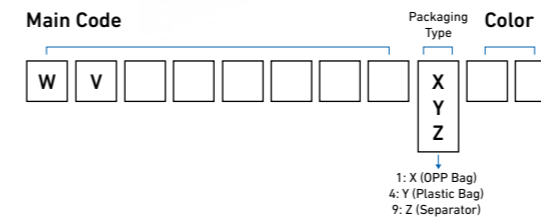

Color Codes



EB – Night
EW – Sea Shell
ED – Ocean
EF – Sandstone
EL – Turquoise

X, Y and Z indicate the packaging type:
1: X (OPP Bag)
4: Y (Plastic Bag)
9: Z (Separator)

¹ Available Colors: EB, ED, EF, EL, EW
² Available Colors: EB, ED, EF, EL
³ Available Colors: EW

Soft Touch

Code	Complete Units (Mechanism + Button/Cover)
WVTT1419Y/Z##	Panasonic Modular Soft Touch USB Connector Mechanism + Cover 1M ¹
WVTT1451Y/Z##	Panasonic Modular Soft Touch TV Socket Terminated Mechanism + Cover 1M ¹
WVTT1452Y/Z##	Panasonic Modular Soft Touch TV Socket Mechanism + Cover Through-pass 12 dB 1M ¹
WVTT1453Y/Z##	Panasonic Modular Soft Touch TV Socket Mechanism + Cover Through-pass 8 dB 1M ¹
WVTT1454Y/Z##	Panasonic Modular Soft Touch TV Socket Mechanism + Cover Lossless 1M ¹
WVTT1458Y/Z##	Panasonic Modular Soft Touch SAT Socket with F Connector Mechanism + Cover Terminated 1M ¹
WVTT1459Y/Z##	Panasonic Modular Soft Touch SAT Socket with F Connector Mechanism + Cover Through-pass 10 dB ¹
WVTT1460Y/Z##	Panasonic Modular Soft Touch TV-SAT Socket Terminated Mechanism + Cover 1M ¹
WVTT1470Z##	Panasonic Modular Soft Touch HDMI Connector Mechanism + Cover 1M ¹
WVTT1471Y/Z##	Panasonic Modular Soft Touch VGA Connector Mechanism + Cover 1M ¹
WVTT1472Y/Z##	Panasonic Modular Soft Touch RCA Connector Mechanism + Cover 1M ¹
WVTT1520Y/Z##	Panasonic Modular Soft Touch PRO Dimmer R 6-100W Mechanism + Cover 1M ¹
WVTT1521Y/Z##	Panasonic Modular Soft Touch PRO Dimmer RC 20-300W Mechanism + Button 1M ¹
WVTT1550Y/Z##	Panasonic Modular Soft Touch Motion Sensor Mechanism + Cover ¹
WVTT1560Y/Z##	Panasonic Modular Soft Touch Audio Socket Mechanism + Cover 1M ¹
WVTT1565Y/Z##	Panasonic Modular Soft Touch PRO Dimmer R 20-300W Mechanism + Cover 1M ¹
WVTT1704Y/Z##	Panasonic Modular Soft Touch Bell (Ding Dong) Mechanism + Button 1M ¹
WVTT2001X/Z##	Panasonic Modular Soft Touch Switch Mechanism + Button 2M ¹
WVTT2002X/Z##	Panasonic Modular Soft Touch Illuminated Switch Mechanism + Button 2M ¹
WVTT2003X/Z##	Panasonic Modular Soft Touch Two Way Switch Mechanism + Button 2M ¹
WVTT2004X/Z##	Panasonic Modular Soft Touch Illuminated Two Way Switch Mechanism + Button 2M ¹
WVTT2005X/Z##	Panasonic Modular Soft Touch Intermediate Switch Mechanism + Button 2M ¹
WVTT2006X/Z##	Panasonic Modular Soft Touch Illuminated Intermediate Switch Mechanism + Button 2M ¹
WVTT2007X/Z##	Panasonic Modular Soft Touch Two Pole Switch Mechanism + Button 2M 16AX ¹
WVTT2008X/Z##	Panasonic Modular Soft Touch Illuminated Two Pole Switch Mechanism + Cover 2M 16AX ¹

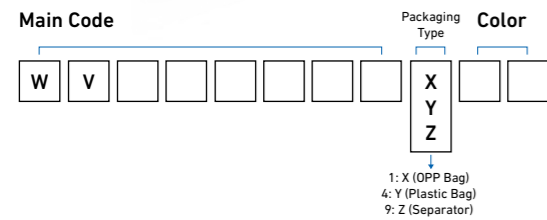

Color Codes



EB – Night
EW – Sea Shell
ED – Ocean
EF – Sandstone
EL – Turquoise

X, Y and Z indicate the packaging type:
1: X (OPP Bag)
4: Y (Plastic Bag)
9: Z (Separator)

¹ Available Colors: EB, ED, EF, EL, EW
² Available Colors: EB, ED, EF, EL
³ Available Colors: EW

Soft Touch

Code	Complete Units (Mechanism + Button/Cover)
WVTT2014Y/Z##	Panasonic Modular Soft Touch DND/MUR Indoor Unit English 220V Mechanism + Button ¹
WVTT2016X/Z##	Panasonic Modular Soft Touch Push Button with Light Symbol Mechanism + Button 2M ¹
WVTT2017X/Z##	Panasonic Modular Soft Touch Illuminated Push Button with Light Symbol Mechanism + Button 2M ¹
WVTT2019X/Z##	Panasonic Modular Soft Touch Push Button with Bell Symbol Mechanism + Button 2M ¹
WVTT2020X/Z##	Panasonic Modular Soft Touch Illuminated Push Button with Bell Symbol Mechanism + Button 230V 2M ¹
WVTT2023X/Z##	Panasonic Modular Soft Touch Blind Control Switch Mechanism + Button 2M ¹
WVTT2045X/Z##	Panasonic Modular Soft Touch Blind Control Push Button Mechanism + Button 2M ¹
WVTT2046X/Z##	Panasonic Modular Soft Touch 24V Illuminated Push Button with Bell Symbol Mechanism + Button 2M ¹
WVTT2210X/Z##	Panasonic Modular Soft Touch Earthed Socket with Lid 2M ¹
WVTT2212X/Z##	Panasonic Modular Soft Touch Earthed Socket 2M ¹
WVTT2213X/Z##	Panasonic Modular Soft Touch UPS Socket 2M ¹
WVTT2224Y/Z##	Panasonic Modular Soft Touch Universal (Combi) Socket 2M ¹
WVTT2226Y/Z##	Panasonic Modular Soft Touch British Type Socket 2M ¹
WVTT2231Y/Z##	Panasonic Modular Soft Touch USB-A+A Charging Socket 2M 5V-2A ¹
WVTT2327Y/Z##	Panasonic Modular Soft Touch Israel Type Socket 2M ¹
WVTT2460Y/Z##	Panasonic Modular Soft Touch TV-SAT Socket Terminated ¹
WVTT2461Y/Z##	Panasonic Modular Soft Touch TV-SAT Socket Through-pass 11 dB ¹
WVTT2462Y/Z##	Panasonic Modular Soft Touch TV-SAT Socket Through-pass 8 dB ¹
WVTT2527Y/Z##	Panasonic Modular Soft Touch Fluorescent Dimmer 1-10V 2M ¹
WVTT2529Y/Z##	Panasonic Modular Soft Touch Universal Dimmer 3-150W 2M ¹
WVTT2541Y/Z##	Panasonic Modular Soft Touch Analog Thermostat 2M ¹
WVTT2561Y/Z##	Panasonic Modular Soft Touch Volume Control Switch 2M ¹
WVTT2563Y/Z##	Panasonic Modular Soft Touch Audio Channel Selection Switch 2M ¹
WVTT2564Y/Z##	Panasonic Modular Soft Touch Emergency Audio Switch (with Transformer) 2M ¹
WVTT3233Y/Z##	Panasonic Modular Soft Touch Shaver Socket 2M ¹
WVTT3577Z##	Panasonic Modular Soft Touch Energy Saver Switch 3M ³

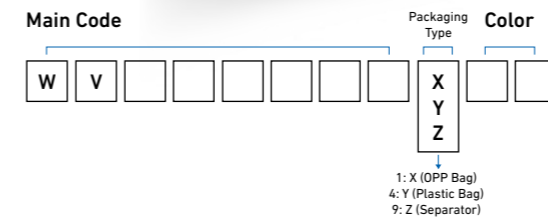

Color Codes

EB – Night
EW – Sea Shell
ED – Ocean
EF – Sandstone
EL – Turquoise


X, Y and Z indicate the packaging type:
1: X (OPP Bag)
4: Y (Plastic Bag)
9: Z (Separator)

¹ Available Colors: EB, ED, EF, EL, EW
² Available Colors: EB, ED, EF, EL
³ Available Colors: EW


Switches (Mechanism and Rockers)

Switch

Mechanism WVTM10019NC	Rocker 1M WVTR10014 <input type="checkbox"/>	Rocker 2M WVTR20014 <input type="checkbox"/>
---------------------------------	--	--




16AX, 250V~
Screw Terminal




Illuminated Switch

Mechanism WVTM10029NC (250V~) WVTM10429NC (Red Illum.) WVTM10479NC (24V)	Rocker 1M WVTR10024 <input type="checkbox"/>	Rocker 2M WVTR20024 <input type="checkbox"/>
--	--	--




16AX, 250V~
Screw Terminal




Two Way Switch

Mechanism WVTM10039NC	Rocker 1M WVTR10034 <input type="checkbox"/>	Rocker 2M WVTR20034 <input type="checkbox"/>
---------------------------------	--	--




16AX, 250V~
Screw Terminal




Illuminated Two Way Switch

Mechanism WVTM10049NC (250V~) WVTM10499NC (24V)	Rocker 1M WVTR10044 <input type="checkbox"/>	Rocker 2M WVTR20044 <input type="checkbox"/>
--	--	--




16AX, 250V~
Screw Terminal




Intermediate Switch

Mechanism WVTM10059NC	Rocker 1M WVTR10054 <input type="checkbox"/>	Rocker 2M WVTR20054 <input type="checkbox"/>
---------------------------------	--	--




16AX, 250V~
Screw Terminal




Illuminated Intermediate Switch

Mechanism WVTM10069NC	Rocker 1M WVTR10064 <input type="checkbox"/>	Rocker 2M WVTR20064 <input type="checkbox"/>
---------------------------------	--	--




16AX, 250V~
Screw Terminal




Two Pole Switch

Mechanism WVTM10439NC	Rocker 1M WVTR10014 <input type="checkbox"/>	Rocker 2M WVTR20014 <input type="checkbox"/>
---------------------------------	--	--




16AX, 250V~
Screw Terminal




Illuminated Two Pole Switch

Mechanism WVTM10449NC	Rocker 1M WVTR10024 <input type="checkbox"/>	Rocker 2M WVTR20024 <input type="checkbox"/>
---------------------------------	--	--



16AX, 250V~
Screw Terminal



Cover Plate Color Alternatives (##)




Type of Terminals and Electrical Cables	Solid Wire	Stranded Wire	Flexible Wire
Screw Terminal	1,0-2,5mm ²	1,0-2,5mm ²	—
Screw Terminal	1,5-2,5mm ²	1,5-2,5mm ²	—


Switches (Mechanism and Rockers)

Push Button with Light Symbol

Mechanism WVTM10169NC	Rocker 1M WVTR10164 <input type="checkbox"/>	Rocker 2M WVTR20164 <input type="checkbox"/>
---------------------------------	--	--




16A, 250V~
Screw Terminal




Illuminated Push Button with Light Symbol

Mechanism WVTM10179NC (250V~) WVTM10489NC (24V)	Rocker 1M WVTR10174 <input type="checkbox"/>	Rocker 2M WVTR20174 <input type="checkbox"/>
--	--	--




16A, 250V~
Screw Terminal




Push Button with Bell Symbol

Mechanism WVTM10169NC	Rocker 1M WVTR10194 <input type="checkbox"/>	Rocker 2M WVTR20194 <input type="checkbox"/>
---------------------------------	--	--




16A, 250V~
Screw Terminal




Illuminated Push Button with Bell Symbol

Mechanism WVTM10209NC	Rocker 1M WVTR10204 <input type="checkbox"/>	Rocker 2M WVTR20204 <input type="checkbox"/>
---------------------------------	--	--




16A, 250V~
Screw Terminal




Push Button with Key Symbol

Mechanism WVTM10169NC	Rocker 1M WVTR10184 <input type="checkbox"/>	Rocker 2M WVTR20184 <input type="checkbox"/>
---------------------------------	--	--




16A, 250V~
Screw Terminal




Illuminated Push Button with Key Symbol

Mechanism WVTM10179NC	Rocker 1M WVTR10214 <input type="checkbox"/>	Rocker 2M WVTR20214 <input type="checkbox"/>
---------------------------------	--	--




16A, 250V~
Screw Terminal




Blind Control Switch

Mechanism WVTM10239NC	Rocker 1M WVTR10234 <input type="checkbox"/>	Rocker 2M WVTR20234 <input type="checkbox"/>
---------------------------------	--	--




10AX, 250V~
Screw Terminal




Blind Control Push Button

Mechanism WVTM10459NC	Rocker 1M WVTR10454 <input type="checkbox"/>	Rocker 2M WVTR20454 <input type="checkbox"/>
---------------------------------	--	--



10A, 250V~
Screw Terminal




Cover Plate Color Alternatives (##)





Type of Terminals and Electrical Cables	Solid Wire	Stranded Wire	Flexible Wire
Screw Terminal	1,0-2,5mm ²	1,0-2,5mm ²	—
Screw Terminal	1,5-2,5mm ²	1,5-2,5mm ²	—

Switches (Mechanism and Rockers)

Emergency Push Button with Cord
Mechanism+Rocker 1M
 WVTT10259





16A, 250V~
Screw Terminal






Double One Way Push Button
Mechanism
 WVTM10139NC

Rocker 1M
 WVTR10134


10A, 250V~
Screw Terminal

Blank Cover
Cover Plate 1M
 WVTR17014



Cable Outlet
Cover Plate 1M
 WVTR17024



Dimmers

PRO Dimmer R 6-100W
Mechanism+Cover Plate 1M
 WVTT15209



230V~
Screw Terminal




PRO Dimmer R 20-300W
Mechanism+Cover Plate 1M
 WVTT15659



230V~
Screw Terminal




PRO Dimmer RC 20-300W
Mechanism+Cover Plate 1M
 WVTT15219




230V~
Screw Terminal






* Available in Opaque White, Dark Grey, Anthracite colors


Rotary Dimmer 1-10V
Mechanism+Cover Plate 2M
 WVTT25279





230V~
Screw Terminal


Universal Dimmer 3-150W
Mechanism+Cover Plate 2M
 WVTT2529-4





230V~
Screw Terminal


Cover Plate Color Alternatives (##)





Type of Terminals and Electrical Cables	Solid Wire	Stranded Wire	Flexible Wire
 Screw Terminal	1,0-2,5mm ²	1,0-2,5mm ²	—
 Screwless Terminal	1,5-2,5mm ²	1,5-2,5mm ²	—

Sockets (Mechanism and Rockers)

Socket
Mechanism+Cover Plate 1M
 WVTT12119




16A, 250V~
Screw Terminal, Safety Shutter

Italian Type Socket
Mechanism+Cover Plate 1M
 WVTT12329





13A - 16A, 250V~
Screw Terminal, Safety Shutter





Euro-American Socket
Mech.+Cover Plate 1M
 WVTT12259

Mech.+Cover Plate 1M
 WVTT12309


13A - 16A, 250V~
Screw Terminal

13A - 16A, 250V~
Screw Terminal, Safety Shutter








Earthed Socket
Mech.+Cover Plate 2M
 WVTT22129

Mech.+Cover Plate 2M
 WVTT22129 RD




16A, 250V~
Screw Terminal, Safety Shutter


Earthed Socket with Lid
Mechanism+Cover Plate 2M
 WVTT22109





16A, 250V~
Screw Terminal, Safety Shutter





UPS Socket
Mechanism+Cover Plate 2M
 WVTT22139





16A, 250V~
Screw Terminal, Safety Shutter


British Type Socket
Mechanism+Cover Plate 2M
 WVTT22269





6A - 10A - 13A, 250V~
Screwless Terminal, Safety Shutter


Universal (Combi) Socket
Mechanism+Cover Plate 2M
 WVTT22249





6A - 10A - 13A, 250V~
Screwless Terminal, Safety Shutter


Israel Type Socket
Mechanism+Cover Plate 2M
 WVTT23279




16A, 250V~
Screw Terminal, Safety Shutter

USB-A+A Charging Socket
Mechanism+Cover Plate 2M
 WVTT22319 (2M) WVTT12319 (1M)




2A, 230V~
Screw Terminal




Shaver Socket
Mechanism+Cover Plate 3M
 WVTT32339






20VA, 110 / 230V~
Screw Terminal

* Available in Opaque White, Metallic White, Black, Dark Grey, Anthracite and Dore colors

Cover Plate Color Alternatives (##)



Type of Terminals and Electrical Cables	Solid Wire	Stranded Wire	Flexible Wire
 Screw Terminal	1,0-2,5mm ²	1,0-2,5mm ²	—
 Screwless Terminal	1,5-2,5mm ²	1,5-2,5mm ²	—
 Screwless Terminal	1,5-2,5mm ²	1,5-2,5mm ²	—

Sockets (Mechanism and Rockers)

USB-C Charging Socket (18W PD)

Mechanism+Cover Plate 1M
WVTT12424 □□



5V-3A




USB-A+C Charging Socket (15W)

Mechanism+Cover Plate 1M
WVTT12419 □□



5V-3A



Data and Television Sockets

Single Phone Socket RJ11 CAT3

Mechanism+Cover Plate 1M
WVTT14029 □□



Data Socket RJ45 CAT5

Mechanism+Cover Plate 1M
WVTT14049 □□



Data Socket RJ45 CAT6

Mechanism+Cover Plate 1M
WVTT14059 □□



Israel-English Type Phone Socket

Mechanism+Cover Plate 1M
WVTT14189 □□



USB Connector

Mechanism+Cover Plate 1M
WVTT14199 □□



TV Socket Terminated

Mechanism+Cover Plate 1M
WVTT14519 □□



TV Socket Through-pass

Mechanism+Cover Plate 1M
WVTT14539 □□ (8 dB)
WVTT14529 □□ (12 dB)



TV Socket Lossless

Mechanism+Cover Plate 1M
WVTT14549 □□



Cover Plate Color Alternatives (##)



Type of Terminals and Electrical Cables	Solid Wire	Stranded Wire	Flexible Wire
Screw Terminal	1,0-2,5mm ²	1,0-2,5mm ²	—
Screw Terminal	1,5-2,5mm ²	1,5-2,5mm ²	—

Data and Television Sockets

SAT Socket with F Connector Terminated

Mechanism+Cover Plate 1M
WVTT14589 □□



SAT Socket with F Connector Through-pass (10 dB)

Mechanism+Cover Plate 1M
WVTT14599 □□



TV-SAT Socket Terminated

Mechanism+Cover Plate 1M
WVTT14609 □□



TV-SAT Socket Terminated

Mechanism+Cover Plate 2M
□□



TV-SAT Socket Through-pass

Mechanism+Cover Plate 2M
WVTT24629 □□ (8 dB)
WVTT24619 □□ (11 dB)



Multimedia Sockets

HDMI Connector

Mechanism+Cover Plate 1M
WVTT14709 □□



VGA Connector

Mechanism+Cover Plate 1M
WVTT14719 □□
WVTT14739 □□ (with Terminal)



RCA Connector

Mechanism+Cover Plate 1M
WVTT14729 □□



Volume Control Switch

Mechanism+Cover Plate 2M
WVTT25619 □□
WVTT25649 □□ (with Transformer)



Audio Channel Selection Switch

Mechanism+Cover Plate 2M
WVTT25639 □□



Audio Socket

Mechanism+Cover Plate 1M
WVTT15609 □□





Cover Plate Color Alternatives (##)




Electronic Products


Analog Thermostat
 Mechanism+Cover Plate 2M
 WVTT25419




230V~



Motion Sensor
 Mechanism+Cover Plate 1M
 WVTT15509



230V~, 1100 W/VA


Bell (Buzzer/Ding Dong)
 Mechanism+Cover Plate 1M
 Ding Dong - WVTT17049
 Buzzer - WVTT17039



230V~, 25mA


Energy Saver Mechanic Switch 5V
 Mechanism 2M
 WVTM25779NC



5V DC, 150mA


Energy Saver Mechanic Switch 5V
 Mechanism 3M
 WVTM35779NC



5V DC, 150mA


Energy Saver Mechanic Switch 230V
 Mechanism 2M
 WVTM25769NC



230V~, 150mA


Energy Saver Mechanic Switch 230V
 Mechanism 3M
 WVTM35769NC



230V~, 150mA


Energy Saver 13,56 MHz RF
 Mechanism 2M
 WVTM25794NC




5V DC, 150mA


Energy Saver 13,56 MHz RF
 Mechanism 3M
 WVTM35794NC




5V DC, 150mA


Energy Saver Cover Plate
 Cover Plate 2M
 WVTR27214 (Optima) - (Sistema)
 WVTR25784 (Ultima)
 WVTR25744 (Slenda)




Suitable Frames:
 2M Frame,
 3M Frame - 2 Modules,
 2x2M Frame,
 3x2M Frame,
 4x2M Frame

Energy Saver Cover Plate
 Cover Plate 3M
 WVTR37214 (Mechanism + Cover)
 WVTT35774 (Cover)






Suitable Frames:
 3M Frame,
 4M Frame,
 7M Frame,




Electronic Products

DND-MUR Indoor Unit
 Mechanism+Rocker 2M
 230V - WVTT20149
 12-24V - WVTT20634




16AX, 250V~
 Screw Terminal
 

DND-MUR Outer Unit
 Mechanism+Cover Plate 2M
 WVTT27059NC



230V~, 2.5W Power Consumption


DND-MUR Outdoor Unit with Bell Button
 Mechanism+CoverPlate 3M
 WVTC07255



12-24V
 * Available in Metallic White, Black, Dark Grey, Anthracite, Dore colors


Direction Indicators

Orientation Lamp - White
 Mechanism+Cover Plate 2M
 WVTT27249WH




230V~, 5W Power Consumption

Orientation Lamp - Red
 Mechanism+Cover Plate 2M
 WVTT27249RD




230V~, 5W Power Consumption

Orientation Lamp - Green
 Mechanism+Cover Plate 2M
 WVTT27249GR




230V~, 5W Power Consumption

Orientation Lamp - Blue
 Mechanism+Cover Plate 2M
 WVTT27249BU




230V~, 5W Power Consumption

Direction Indicator - Arrow
 Mechanism+Cover Plate 2M
 WVTC07079NC




230V~, 5W Power Consumption

Direction Indicator - Warning
 Mechanism+Cover Plate 2M
 WVTC07099NC




230V~, 5W Power Consumption

Direction Indicator - Exit
 Mechanism+Cover Plate 2M
 WVTC07109NC




230V~, 5W Power Consumption

Direction Indicator - Male/Female
 Mech.+Cover Plate 2M
 WVTC07189NC (M) Mech.+Cover Plate 2M
 WVTC07199NC (F)



230V~, 5W Power Consumption

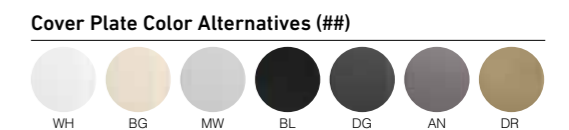

Enhance the Guest Accommodation Experience with the DND-MUR Unit!

The new Panasonic DND-MUR unit redefines the guest accommodation experience.

By combining the doorbell, room status indicator, and room number in a single module, it adds order and sophistication to entrance areas while enabling quick and accurate room status management. With its specially designed backlit structure, it ensures clear visibility under all lighting conditions, and with a variety of color options, it effortlessly adapts to any architectural style.


Discover Panasonic DND-MUR units for a distinctive, brand-focused touch that reflects your hotel's unique character.



Mechanism/Rocker/Frame Alternatives

Mechanism	Cover Plate/Rocker	Frame	Complete

Cover Plate/Rocker Color Alternatives

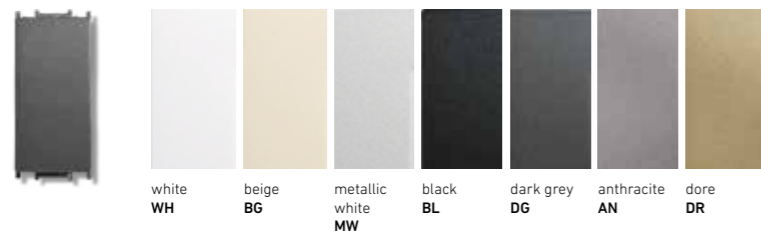

Frame Color Alternatives

<p>Metallic</p> <p>inox MI chrome MC gold MG</p>	<p>Glass</p> <p>white GW light green GG claret red GC black GB</p>
<p>Eloxal</p> <p>silver AS bronze AR black AB</p>	<p>Wooden</p> <p>bamboo WB wenge WV walnut WW</p>
<p>Metallic</p> <p>inox Inox+Dark Grey IG Inox+Metallic White IN</p> <p>inox matt Inox Matt-Dore IM Inox Matt+Metallic White IB</p> <p>chrome Chrome+Dark Grey KF Chrome+Metallic White CH</p> <p>chrome matt Chrome Matt+Dark Grey KD Chrome Matt+Metallic White CM</p>	<p>una Una+Dark Grey UN Una+Metallic White UW</p> <p>antique Antique+Dore AQ Antique+Black AY</p> <p>gold Gold+Dore GL Gold+Black GS</p>
<p>Slenda</p> <p>white WH beige BG white MW black BL dark grey DG anthracite AN dore DR</p>	
<p>Optima</p> <p>white WH beige BG white MW black BL dark grey DG anthracite AN dore DR</p>	

Ultima Frames

Frames

2M Frame
WVTF28405



3M Frame - 1 Module
WVTF28415



3M Frame
WVTF28435



3M Frame - 2 Modules
WVTF28425



4M Frame
WVTF28445



7M Frame
WVTF28475



2x2M Frame
WVTF28485



3x2M Frame
WVTF28495



4x2M Frame
WVTF28505



*Please be aware while choosing suitable frames for energy saver modules.

Ultima Frames

Frame Colors	2M Frame	3M Frame	4M Frame	7M Frame
Wooden - American Walnut	WVTF28405WW	WVTF28435WW	WVTF28445WW	WVTF28475WW
Wooden - Bamboo	WVTF28405WB	WVTF28435WB	WVTF28445WB	WVTF28475WB
Wooden - Wenge	WVTF28405WV	WVTF28435WV	WVTF28445WV	WVTF28475WV
Eloxal - Bronze	WVTF28405AR	WVTF28435AR	WVTF28445AR	WVTF28475AR
Eloxal - Silver	WVTF28405AS	WVTF28435AS	WVTF28445AS	WVTF28475AS
Eloxal - Black	WVTF28405AB	WVTF28435AB	WVTF28445AB	WVTF28475AB
Glass - White	WVTF28405GW	WVTF28435GW	WVTF28445GW	WVTF28475GW
Glass - Claret Red	WVTF28405GC	WVTF28435GC	WVTF28445GC	WVTF28475GC
Glass - Black	WVTF28405GB	WVTF28435GB	WVTF28445GB	WVTF28475GB
Glass - Light Green	WVTF28405GG	WVTF28435GG	WVTF28445GG	WVTF28475GG
Metallic Chrome	WVTF28405MC	WVTF28435MC	WVTF28445MC	WVTF28475MC
Metallic Gold	WVTF28405MG	WVTF28435MG	WVTF28445MG	WVTF28475MG
Metallic Inox	WVTF28405MI	WVTF28435MI	WVTF28445MI	WVTF28475MI

Frame Colors	2X2M Frame	3X2M Frame	4X2M Frame
Wooden - American Walnut	WVTF28485WW	WVTF28495WW	WVTF28505WW
Wooden - Bamboo	WVTF28485WB	WVTF28495WB	WVTF28505WB
Wooden - Wenge	WVTF28485WV	WVTF28495WV	WVTF28505WV
Eloxal - Bronze	WVTF28485AR	WVTF28495AR	WVTF28505AR
Eloxal - Silver	WVTF28485AS	WVTF28495AS	WVTF28505AS
Eloxal - Black	WVTF28485AB	WVTF28495AB	WVTF28505AB
Glass - White	WVTF28485GW	WVTF28495GW	WVTF28505GW
Glass - Claret Red	WVTF28485GC	WVTF28495GC	WVTF28505GC
Glass - Black	WVTF28485GB	WVTF28495GB	WVTF28505GB
Glass - Light Green	WVTF28485GG	WVTF28495GG	WVTF28505GG
Metallic Chrome	WVTF28485MC	WVTF28495MC	WVTF28505MC
Metallic Gold	WVTF28485MG	WVTF28495MG	WVTF28505MG
Metallic Inox	WVTF28485MI	WVTF28495MI	WVTF28505MI

Sistema Frames

Frames

2M Frame
WVTF18405



2x2M Frame
WVTF18485



3M Frame
WVTF18435



3x2M Frame
WVTF18495



4M Frame
WVTF18445



4x2M Frame
WVTF18505



7M Frame
WVTF18475



*Please be aware while choosing suitable frames for energy saver modules.

Sistema Frames

Frame Colors	2M Frame	3M Frame	4M Frame	7M Frame
Antique - Dore	WVTF18405AQ	WVTF18435AQ	WVTF18445AQ	WVTF18475AQ
Antique - Black	WVTF18405AY	WVTF18435AY	WVTF18445AY	WVTF18475AY
Chrome - Dark Grey	WVTF18405KF	WVTF18435KF	WVTF18445KF	WVTF18475KF
Chrome - Metallic White	WVTF18405CH	WVTF18435CH	WVTF18445CH	WVTF18475CH
Chrome Matt - Dark Grey	WVTF18405KD	WVTF18435KD	WVTF18445KD	WVTF18475KD
Chrome Matt - Metallic White	WVTF18405CM	WVTF18435CM	WVTF18445CM	WVTF18475CM
Gold - Black	WVTF18405GS	WVTF18435GS	WVTF18445GS	WVTF18475GS
Gold - Dore	WVTF18405GL	WVTF18435GL	WVTF18445GL	WVTF18475GL
Inox - Dark Grey	WVTF18405IG	WVTF18435IG	WVTF18445IG	WVTF18475IG
Inox - Metallic White	WVTF18405IN	WVTF18435IN	WVTF18445IN	WVTF18475IN
Inox Matt - Dore	WVTF18405IM	WVTF18435IM	WVTF18445IM	WVTF18475IM
Inox Matt - Metallic White	WVTF18405IB	WVTF18435IB	WVTF18445IB	WVTF18475IB
Una - Dark Grey	WVTF18405UN	WVTF18435UN	WVTF18445UN	WVTF18475UN
Una - Metallic White	WVTF18405UW	WVTF18435UW	WVTF18445UW	WVTF18475UW

Frame Colors	2X2M Frame	3X2M Frame	4X2M Frame
Antique - Dore	WVTF18485AQ	WVTF18495AQ	WVTF18505AQ
Antique - Black	WVTF18485AY	WVTF18495AY	WVTF18505AY
Chrome - Dark Grey	WVTF18485KF	WVTF18495KF	WVTF18505KF
Chrome - Metallic White	WVTF18485CH	WVTF18495CH	WVTF18505CH
Chrome Matt - Dark Grey	WVTF18485KD	WVTF18495KD	WVTF18505KD
Chrome Matt - Metallic White	WVTF18485CM	WVTF18495CM	WVTF18505CM
Gold - Black	WVTF18485GS	WVTF18495GS	WVTF18505GS
Gold - Dore	WVTF18485GL	WVTF18495GL	WVTF18505GL
Inox - Dark Grey	WVTF18485IG	WVTF18495IG	WVTF18505IG
Inox - Metallic White	WVTF18485IN	WVTF18495IN	WVTF18505IN
Inox Matt - Dore	WVTF18485IM	WVTF18495IM	WVTF18505IM
Inox Matt - Metallic White	WVTF18485IB	WVTF18495IB	WVTF18505IB
Una - Dark Grey	WVTF18485UN	WVTF18495UN	WVTF18505UN
Una - Metallic White	WVTF18485UW	WVTF18495UW	WVTF18505UW

Slenda Frames

Frames

2M Frame
WVTF38401



3M Frame - 1 Module
WVTF38411



3M Frame
WVTF38431



3M Frame - 2 Modules
WVTF38421



4M Frame
WVTF38441



7M Frame
WVTF38471



2x2M Frame
WVTF38481



3x2M Frame
WVTF38491



4x2M Frame
WVTF38501



Slenda Frames

Frame Colors	2M Frame	3M Frame	1/3M Frame	2/3M Frame
Anthracite	WVTF3840-1AN	WVTF3843-1AN	WVTF3841-1AN	WVTF3842-1AN
Dore	WVTF3840-1DR	WVTF3843-1DR	WVTF3841-1DR	WVTF3842-1DR
Dark Grey	WVTF3840-1DG	WVTF3843-1DG	WVTF3841-1DG	WVTF3842-1DG
Beige	WVTF3840-1BG	WVTF3843-1BG	WVTF3841-1BG	WVTF3842-1BG
Metallic White	WVTF3840-1MW	WVTF3843-1MW	WVTF3841-1MW	WVTF3842-1MW
Opaque White	WVTF3840-1WH	WVTF3843-1WH	WVTF3841-1WH	WVTF3842-1WH
Black	WVTF3840-1BL	WVTF3843-1BL	WVTF3841-1BL	WVTF3842-1BL

Frame Colors	4M Frame	7M Frame	2X2M Frame	3X2M Frame
Anthracite	WVTF3844-1AN	WVTF3847-1AN	WVTF3848-1AN	WVTF3849-1AN
Dore	WVTF3844-1DR	WVTF3847-1DR	WVTF3848-1DR	WVTF3849-1DR
Dark Grey	WVTF3844-1DG	WVTF3847-1DG	WVTF3848-1DG	WVTF3849-1DG
Beige	WVTF3844-1BG	WVTF3847-1BG	WVTF3848-1BG	WVTF3849-1BG
Metallic White	WVTF3844-1MW	WVTF3847-1MW	WVTF3848-1MW	WVTF3849-1MW
Opaque White	WVTF3844-1WH	WVTF3847-1WH	WVTF3848-1WH	WVTF3849-1WH
Black	WVTF3844-1BL	WVTF3847-1BL	WVTF3848-1BL	WVTF3849-1BL

Frame Colors	4X2M Frame
Anthracite	WVTF3850-1AN
Dore	WVTF3850-1DR
Dark Grey	WVTF3850-1DG
Beige	WVTF3850-1BG
Metallic White	WVTF3850-1MW
Opaque White	WVTF3850-1WH
Black	WVTF3850-1BL

*Please be aware while choosing suitable frames for energy saver modules.

Optima Frames

Frames

2M Frame
WVTF08401 □□



3M Frame - 1 Module
WVTF08411 □□



IP55 Frame 3M
WVTF08601 □□



3M Frame
WVTF08431 □□



3M Frame - 2 Modules
WVTF08421 □□



IP55 Frame 4M
WVTF08611 □□



4M Frame
WVTF08441 □□



7M Frame
WVTF08471 □□



2x2M Frame
WVTF08481 □□



3x2M Frame
WVTF08491 □□



4x2M Frame
WVTF08501 □□



*Please be aware while choosing suitable frames for energy saver modules.

Optima Frames

Frame Colors	2M Frame	3M Frame	4M Frame	7M Frame
Anthracite	WVTF08401AN	WVTF08431AN	WVTF08441AN	WVTF08471AN
Dore	WVTF08401DR	WVTF08431DR	WVTF08441DR	WVTF08471DR
Dark Grey	WVTF08401DG	WVTF08431DG	WVTF08441DG	WVTF08471DG
Beige	WVTF08401BG	WVTF08431BG	WVTF08441BG	WVTF08471BG
Metallic White	WVTF08401MW	WVTF08431MW	WVTF08441MW	WVTF08471MW
Opaque White	WVTF08401WH	WVTF08431WH	WVTF08441WH	WVTF08471WH
Black	WVTF08401BL	WVTF08431BL	WVTF08441BL	WVTF08471BL

Frame Colors	1/3M Frame	2/3M Frame	2X2M Frame	3X2M Frame	4X2M Frame
Anthracite	WVTF08411AN	WVTF08421AN	WVTF08481AN	WVTF08491AN	WVTF08501AN
Dore	WVTF08411DR	WVTF08421DR	WVTF08481DR	WVTF08491DR	WVTF08501DR
Dark Grey	WVTF08411DG	WVTF08421DG	WVTF08481DG	WVTF08491DG	WVTF08501DG
Beige	WVTF08411BG	WVTF08421BG	WVTF08481BG	WVTF08491BG	WVTF08501BG
Metallic White	WVTF08411MW	WVTF08421MW	WVTF08481MW	WVTF08491MW	WVTF08501MW
Opaque White	WVTF08411WH	WVTF08421WH	WVTF08481WH	WVTF08491WH	WVTF08501WH
Black	WVTF08411BL	WVTF08421BL	WVTF08481BL	WVTF08491BL	WVTF08501BL

Frame Colors	IP55 3M	IP55 4M
Anthracite	WVTF08601AN	WVTF08611AN
Dore	WVTF08601DR	WVTF08611DR
Dark Grey	WVTF08601DG	WVTF08611DG
Beige	WVTF08601BG	WVTF08611BG
Metallic White	WVTF08601MW	WVTF08611MW
Opaque White	WVTF08601WH	WVTF08611WH
Black	WVTF08601BL	WVTF08611BL

Mounting Frames



WVTC07304NC Mounting Frame 2M
WVTC07314NC Mounting 2M-Drywall



WVTC07324NC Mounting Frame 2M-Metal



WVTC07404NC Slenda Mounting Frame 2M



WVTC07334NC Mounting Frame 2/3M
WVTC07374NC Mounting Frame 2/3M with Claw



WVTC07434NC Slenda Mounting Frame 2/3M



WVTC07344NC Mounting Frame 3M



WVTC07444NC Slenda Mounting Frame 3M



WVTC07354NC Mounting Frame 4M



WVTC07454NC Slenda Mounting Frame 4M



WVTC07364NC Mounting Frame 7M



WVTC07464NC Slenda Mounting Frame 7M

Wall Mount Boxes



WVTC07844NC
2M Wall Mount Box H.F. - Drywall
Thea Slenda is not compatible with 2M drywall mounting box.
Compatible Series: Thea Ultima, Sistema and Optima



WVTC07854NC
3M Wall Mount Box H.F. - Drywall
Compatible Series: Thea Ultima, Sistema, Slenda and Optima



WVTC07804NC
2M Wall Mount Box H.F.
Compatible Series: Thea Ultima, Sistema, Slenda and Optima



WVTC07814NC
3M Wall Mount Box H.F.
Compatible Series: Thea Ultima, Sistema, Slenda and Optima



WVTC07864NC
4M Wall Mount Box H.F. - Drywall
Compatible Series: Thea Ultima, Sistema, Slenda and Optima



WVTC07874NC
7M Wall Mount Box H.F. - Drywall
Compatible Series: Thea Ultima, Sistema, Slenda and Optima




WVTC07824NC
4M Wall Mount Box H.F.
Compatible Series: Thea Ultima, Sistema, Slenda and Optima



WVTC07834NC
7M Wall Mount Box H.F.
Compatible Series: Thea Ultima, Sistema, Slenda and Optima


Assembling for Wall Box (German Type)

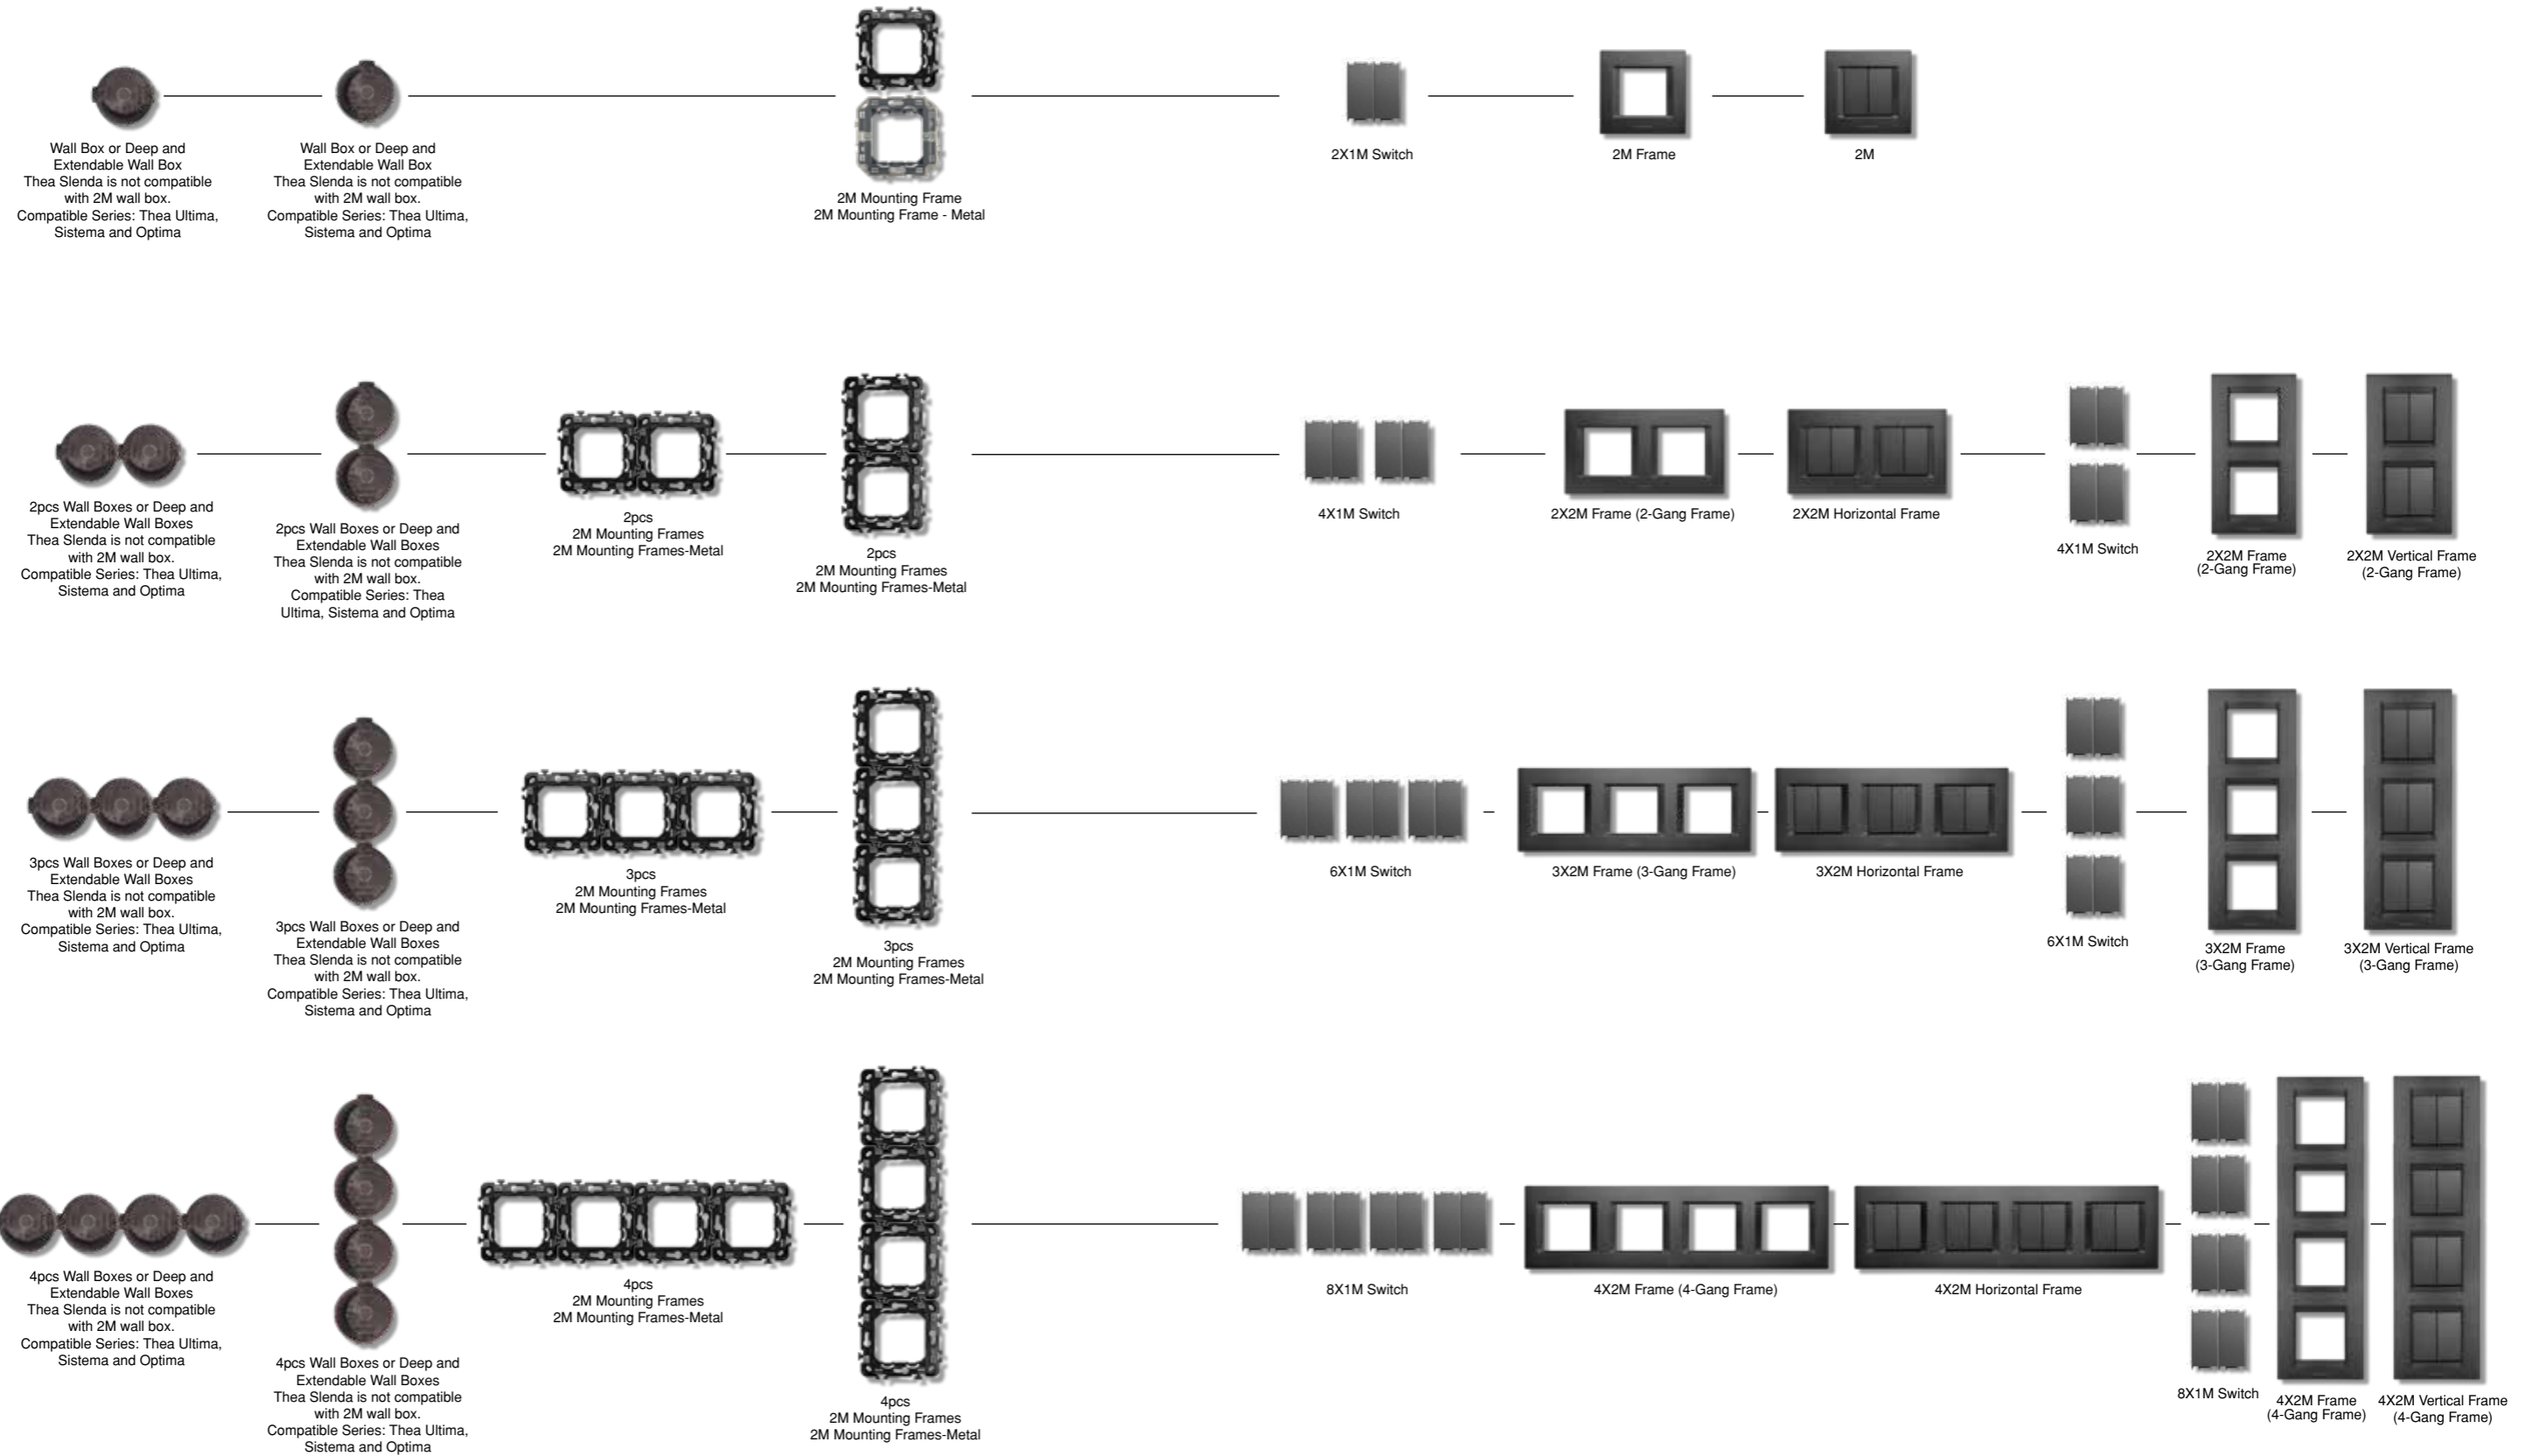

Order Codes and Product Name


- 90926001 Wall Box - Deep and Extendable
- 90926003 Wall Box
- 90926301 Wall Box - Deep and Extendable (Halogen Free)
- 90926303 Wall Box (Halogen Free)

Assembling for Drywall Mounting Box

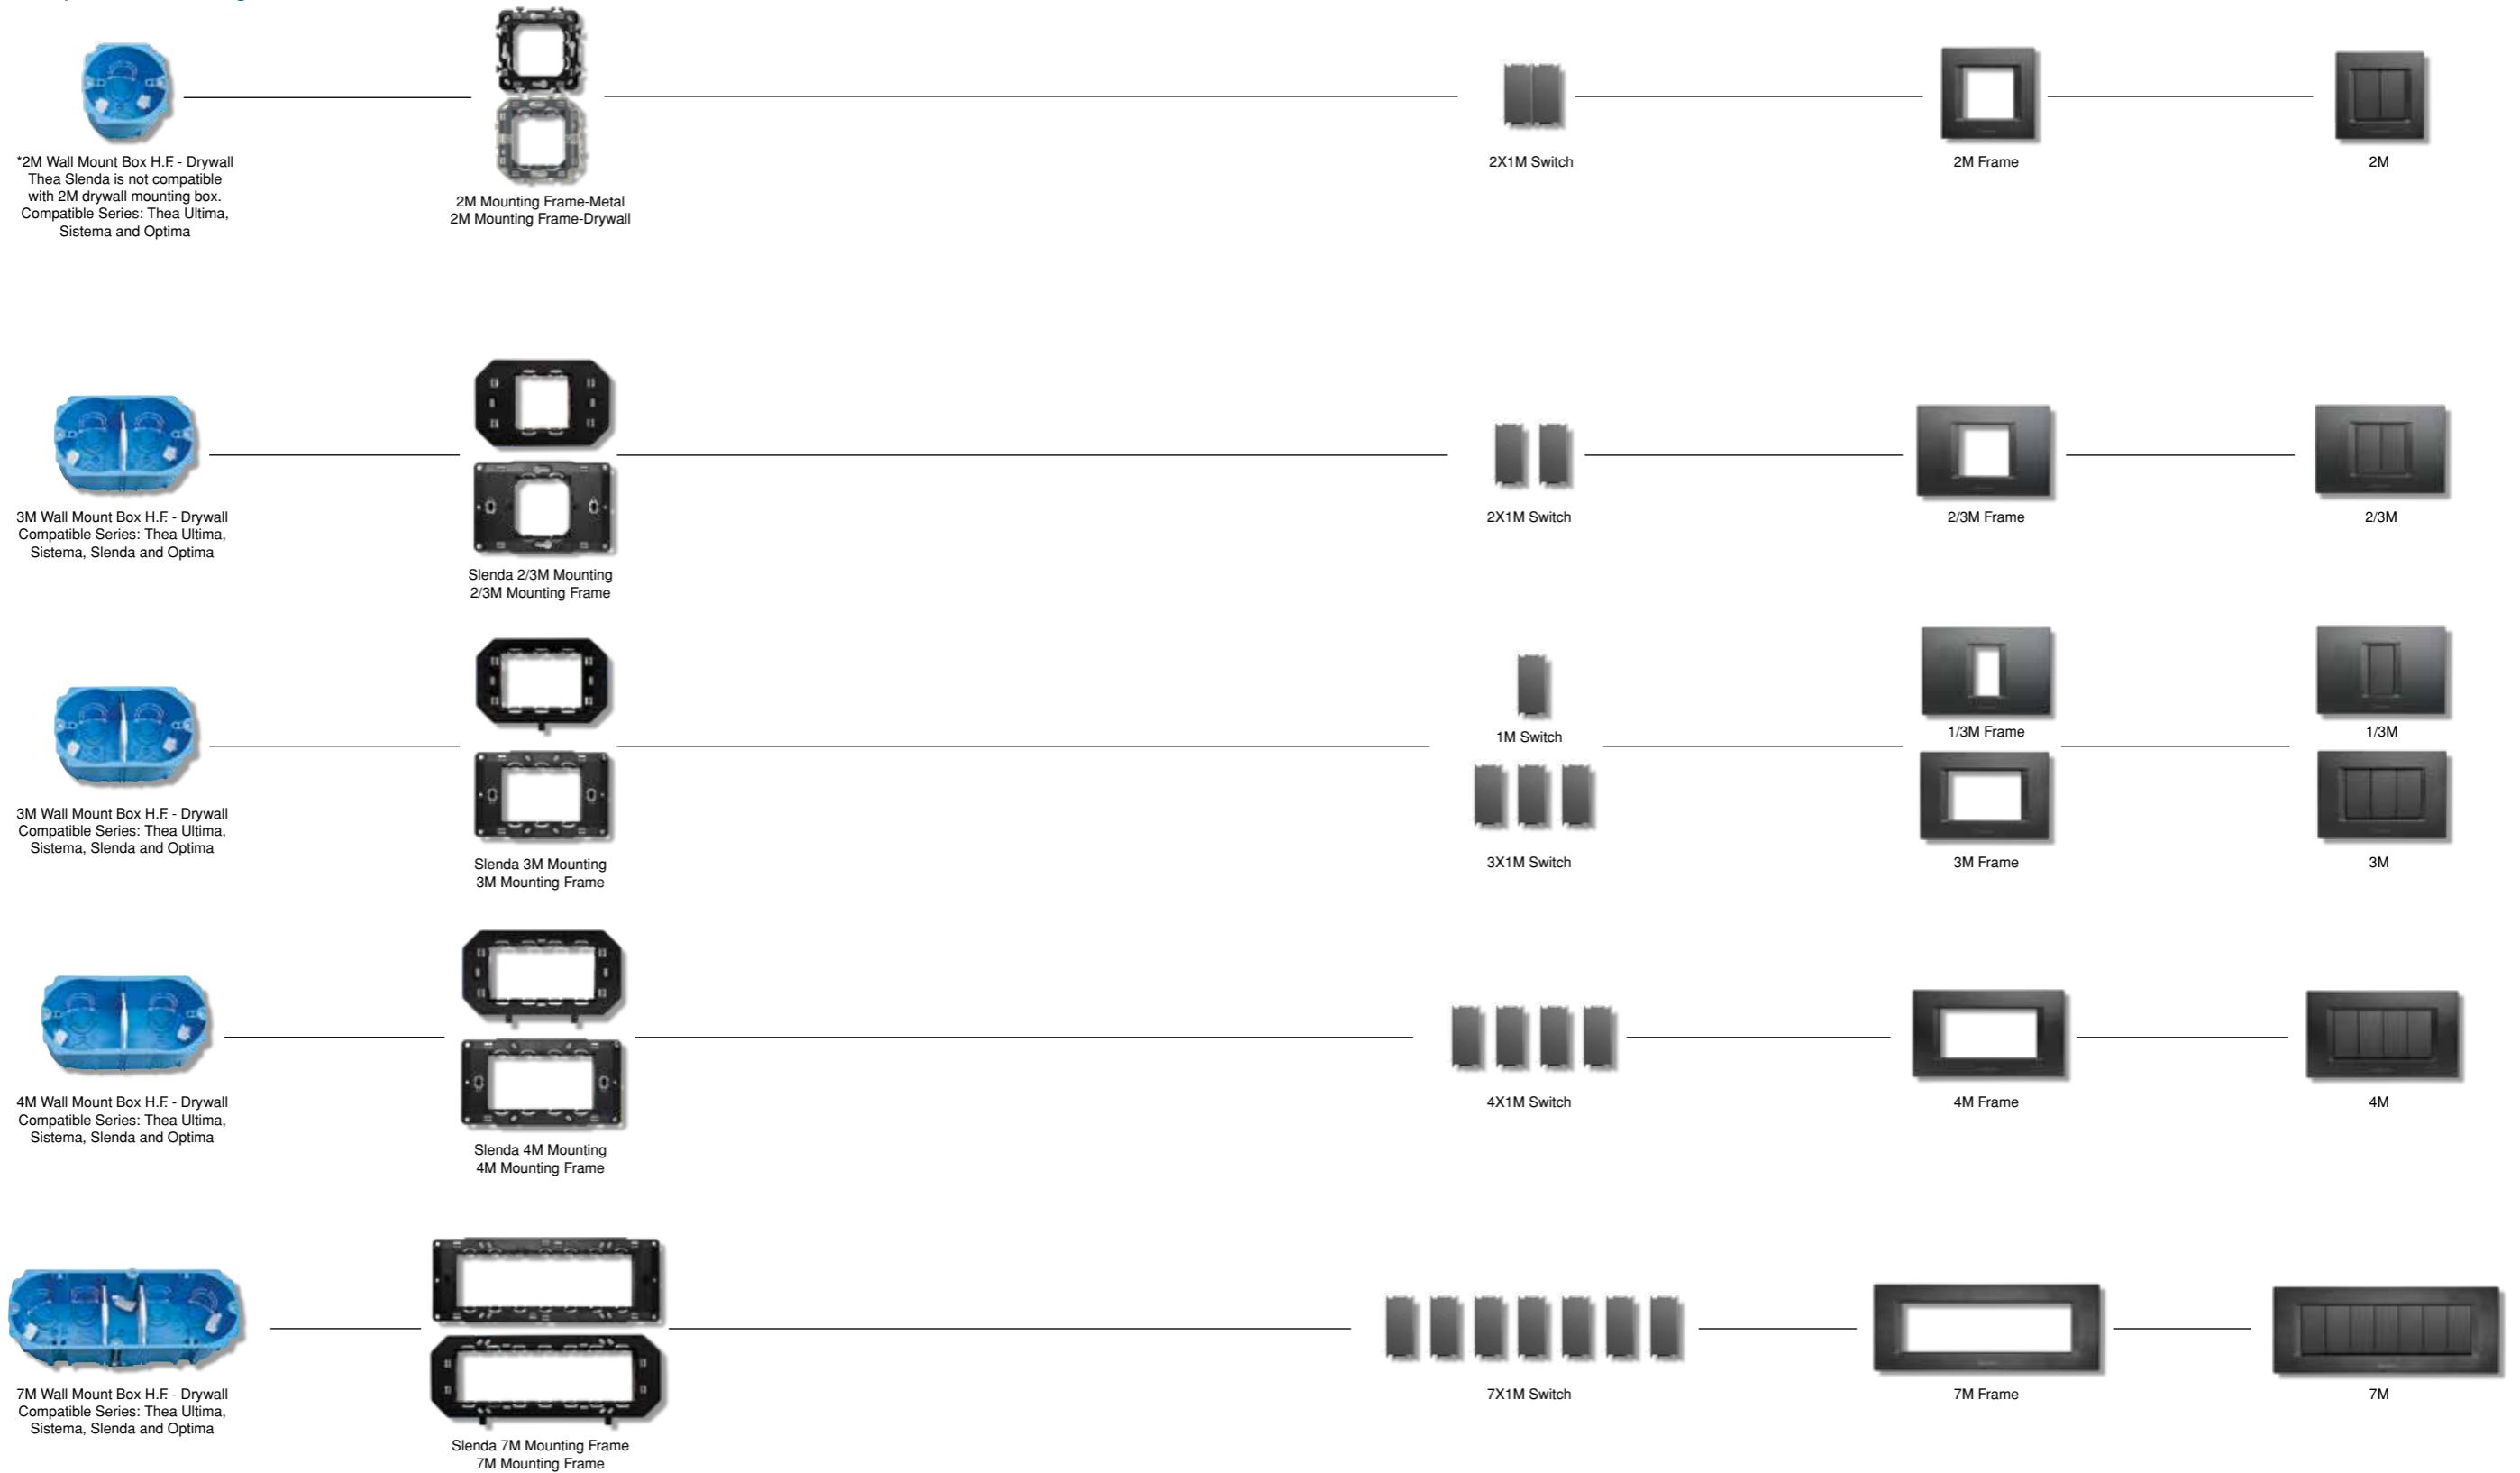


* Thea Slenda is not compatible with 2M drywall mounting box.

Assembling for Modular Box

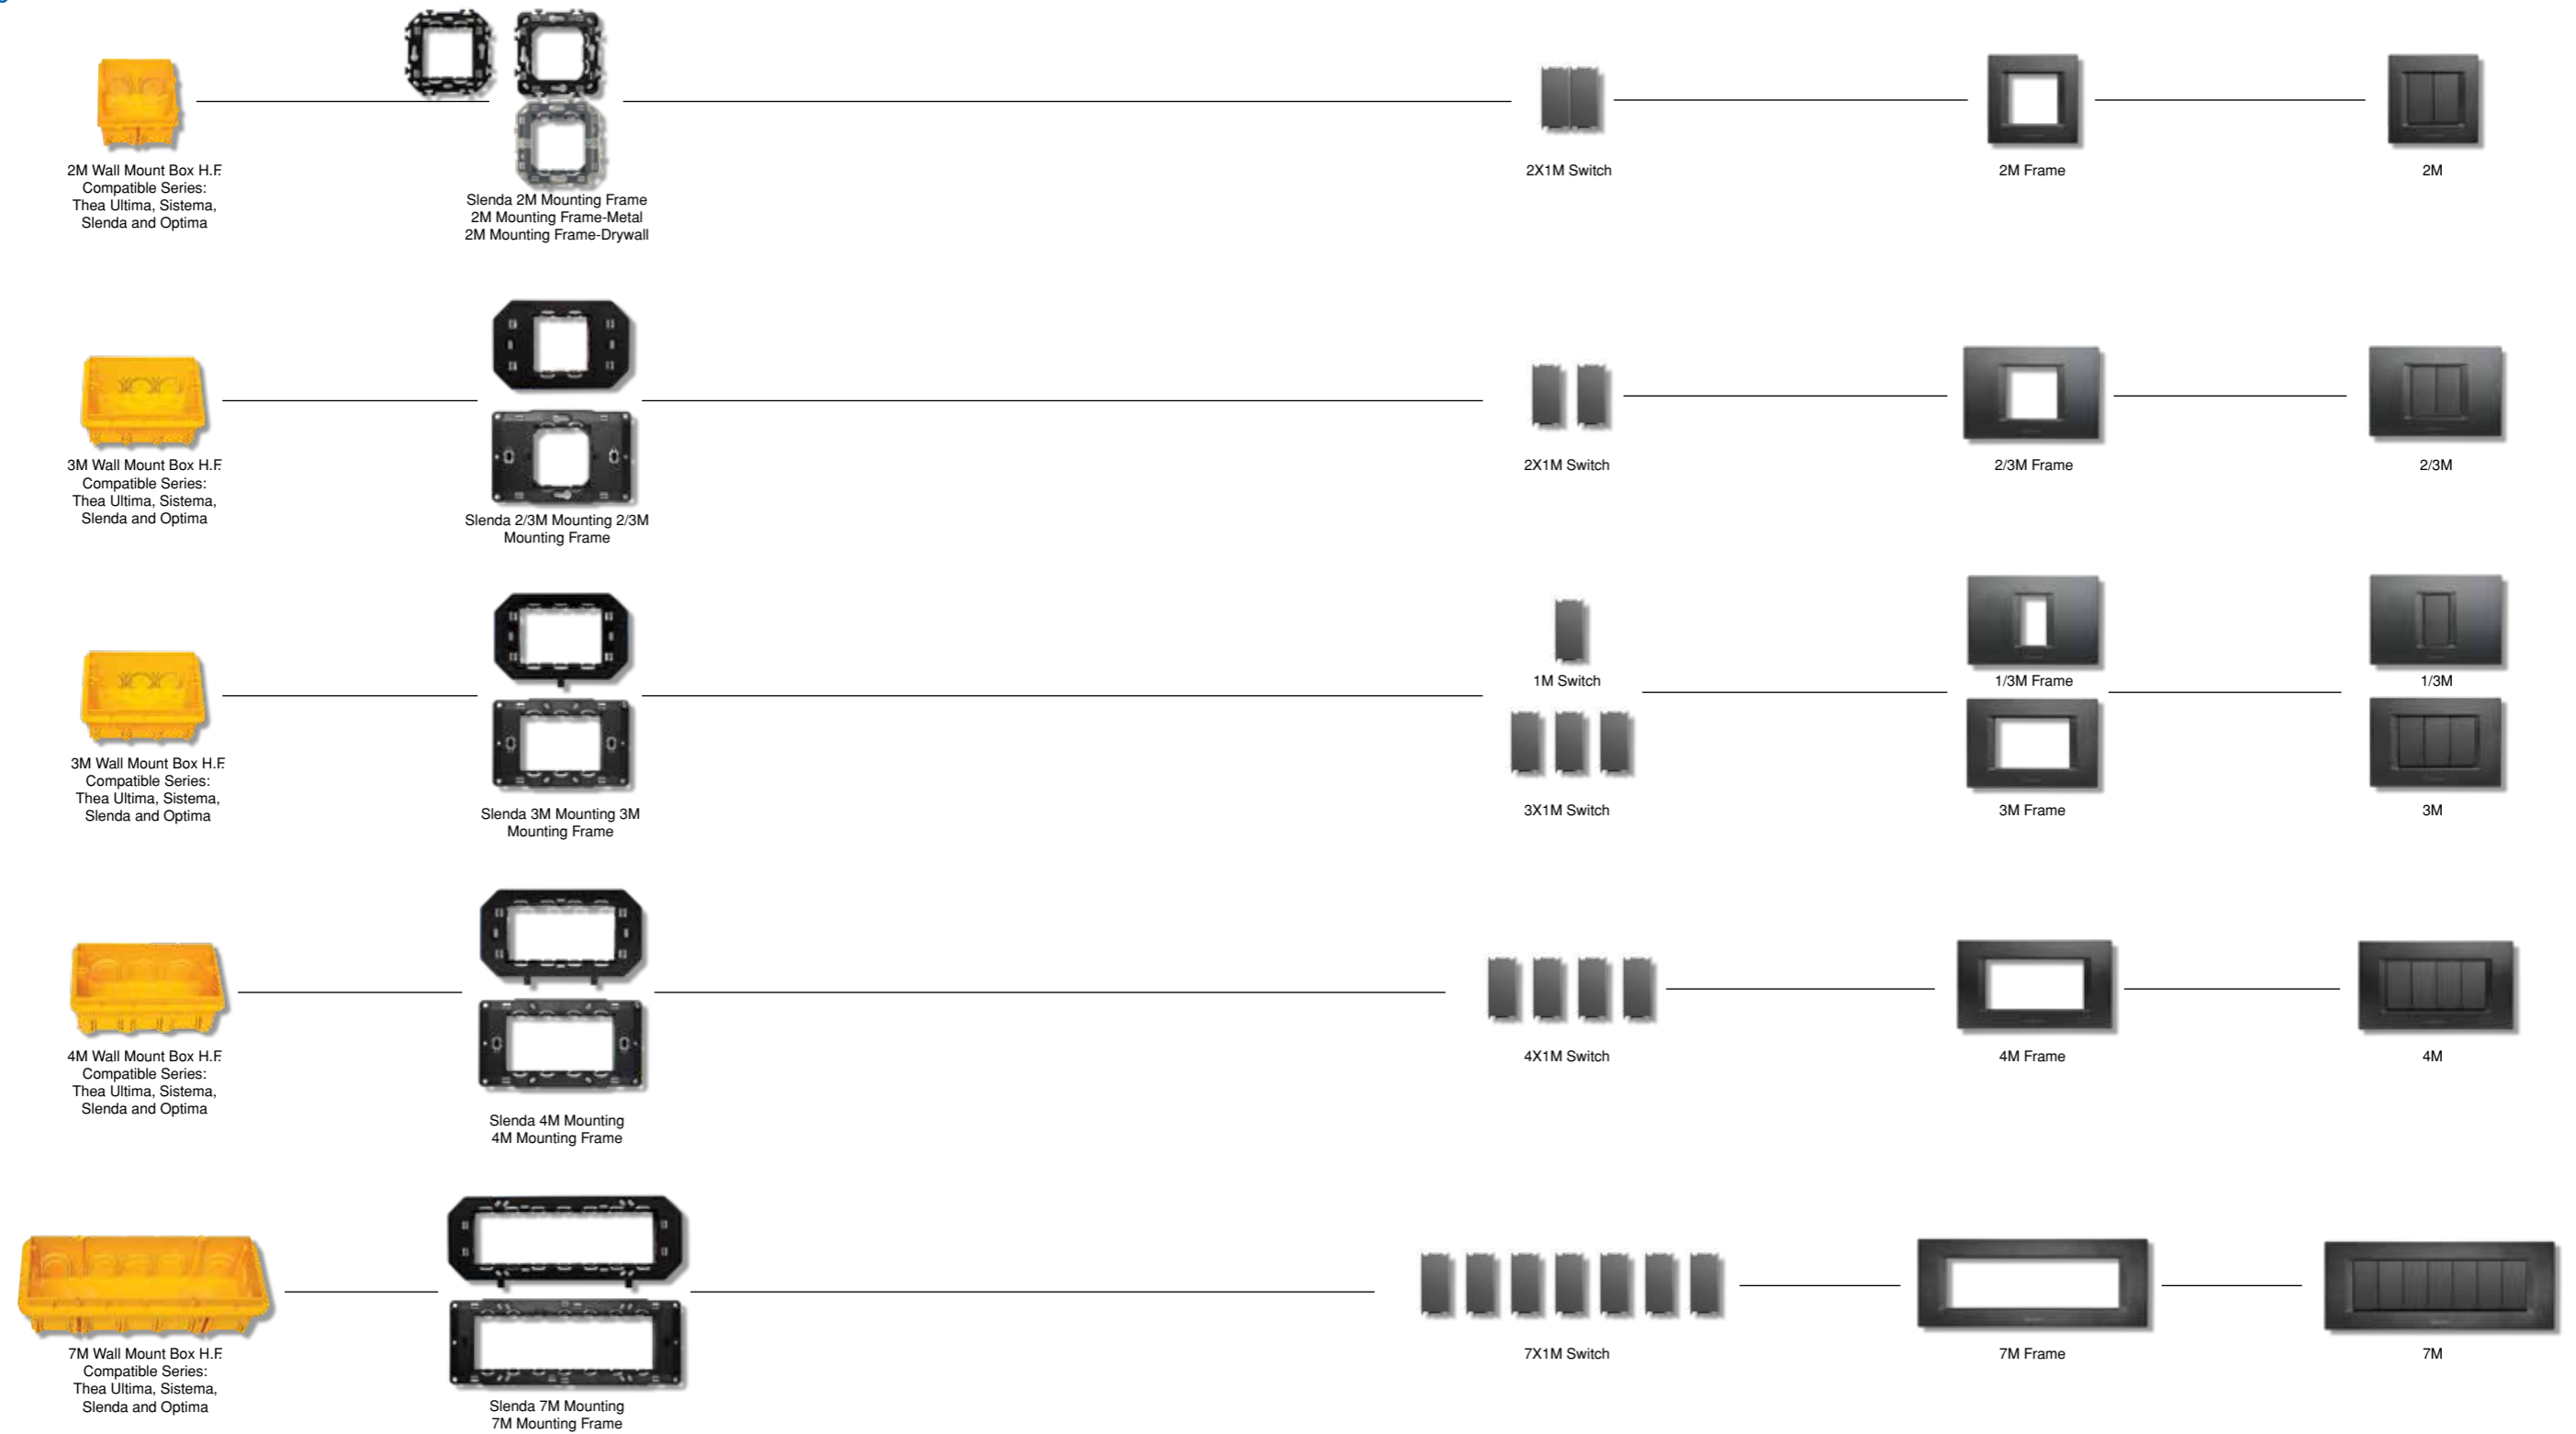

Order Codes and Product Name

WVTC07804NC	2M Wall Mount Box H.F.
WVTC07814NC	3M Wall Mount Box H.F.
WVTC07824NC	4M Wall Mount Box H.F.
WVTC07834NC	7M Wall Mount Box H.F.

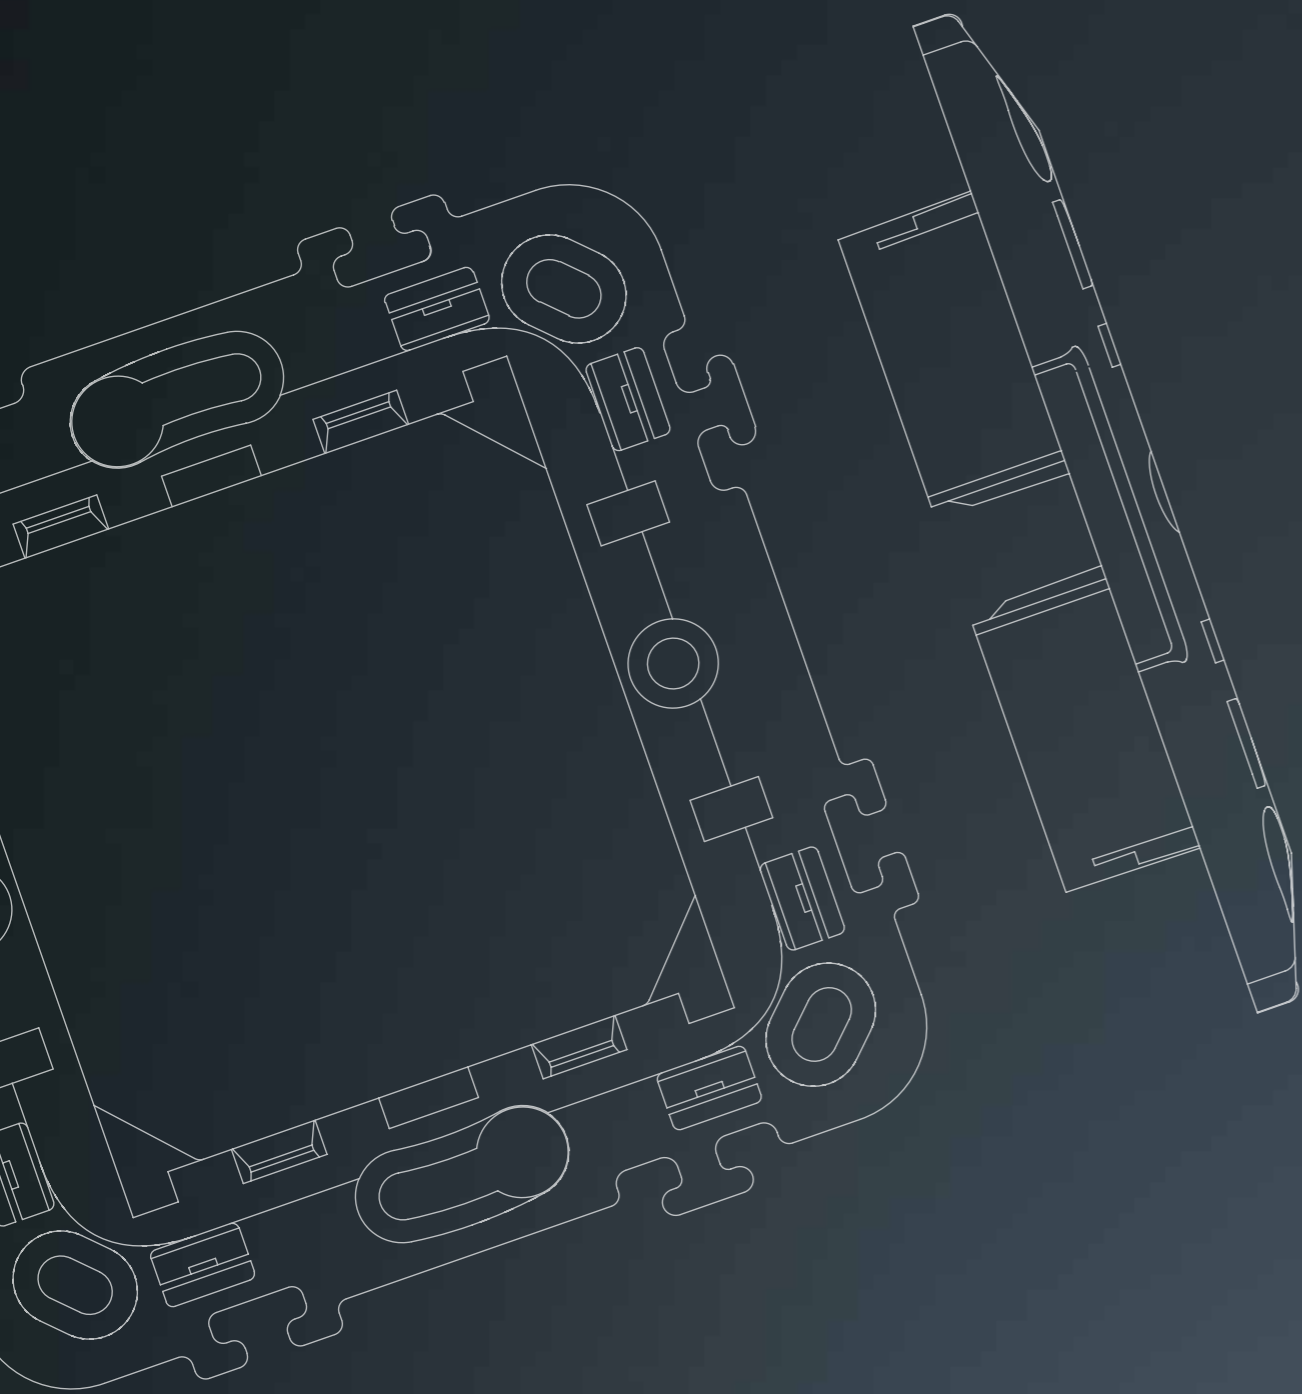



Technical Specifications

- 62 - 71** Technical Specifications and Circuit Diagrams
- 72** Ultima Frame Dimensions
- 73** Sistema Frame Dimensions
- 74** Optima Frame Dimensions
- 75** Wall Box Dimensions
- 76** Mounting Frame Dimensions

Technical Drawings and Circuit Diagrams



Technical Specifications	Switch	Circuit Diagram
--------------------------	--------	-----------------

- Controls a lamp or a lamp group from a point.
- 16AX, 250V~
- One-way
- Screw connection





Technical Specifications	One-Way Switch, Illuminated	Circuit Diagram
--------------------------	-----------------------------	-----------------

- Controls a lamp or a lamp group from a point.
- 16AX, 250V~
- One-way
- Illuminated indicator
- Screw connection





Technical Specifications	Two-Way Switch	Circuit Diagram
--------------------------	----------------	-----------------

- Controls a lamp or a lamp group from two different points.
- 16AX, 250V~
- Two-way
- Screw connection





Technical Specifications	Two-Way Switch, Illuminated	Circuit Diagram
--------------------------	-----------------------------	-----------------

- Controls a lamp or a lamp group from two different points.
- 16AX, 250V~
- Two-way
- Illuminated indicator
- Screw connection

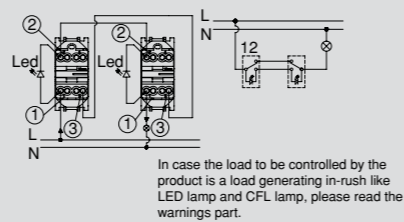



Technical Specifications	Intermediate Switch	Circuit Diagram
--------------------------	---------------------	-----------------

- Controls a lamp or a lamp group from more than two points.
- 16AX, 250V~
- Two-way
- Screw connection

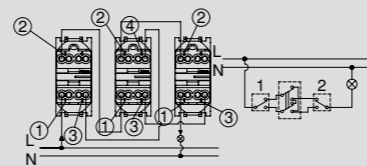



Technical Specifications	Intermediate Switch, Illuminated	Circuit Diagram
--------------------------	----------------------------------	-----------------

- Controls a lamp or lamp group from more than two points.
- 16AX, 250V~
- Two-way
- Illuminated indicator
- Screw connection

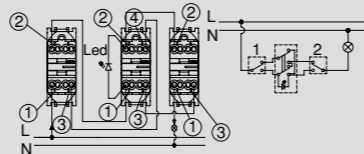

Technical Specifications	Two-Pole Switch	Circuit Diagram
--------------------------	-----------------	-----------------



- Two poles enable simultaneous disconnection of switches, phase and neutral.
- 16AX, 250V~
- Double pole, one-way
- Screw connection



Technical Drawings and Circuit Diagrams



Technical Specifications	Two-Pole Switch, Illuminated	Circuit Diagram
--------------------------	------------------------------	-----------------

- Two poles enable simultaneous disconnection of switches, phase and neutral.
- 16AX, 250V~
- Double pole, single way
- Illuminated indicator
- Screw connection

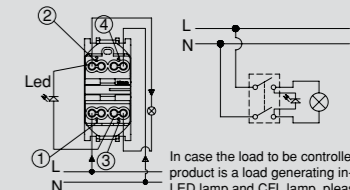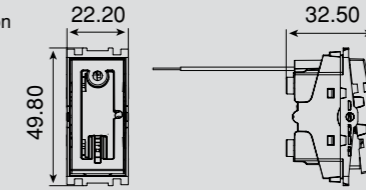



Technical Specifications	One-Way Push Button	Circuit Diagram
--------------------------	---------------------	-----------------

- Generates control signals for external trigger circuits such as building lights with automatic timer, motion detector or automated system.
- 16A, 250V~
- One-way
- Push button, instant trigger
- Screw connection





Technical Specifications	One-Way Push Button, Illuminated	Circuit Diagram
--------------------------	----------------------------------	-----------------

- Generates control signals for external trigger circuits such as building lights with automatic timer, motion detector or automated system.
- 16A, 250V~
- One-way
- Push button, instant trigger
- Illuminated indicator
- Screw connection

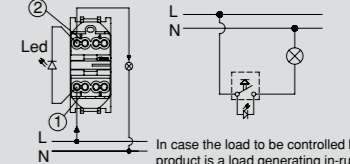



Technical Specifications	Push Button with Key Symbol	Circuit Diagram
--------------------------	-----------------------------	-----------------

- Generates control signals for external trigger circuits such as building lights with automatic timer, motion detector or automated system.
- 16A, 250V~
- One-way
- Push button, instant trigger
- Screw connection

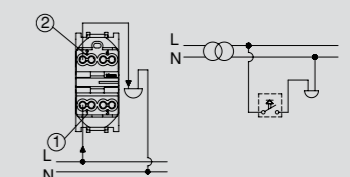



Technical Specifications	Push Button with Bell Symbol	Circuit Diagram
--------------------------	------------------------------	-----------------

- Controls the door bell.
- 16A, 250V~
- One-way
- Push button, instant trigger
- Screw connection

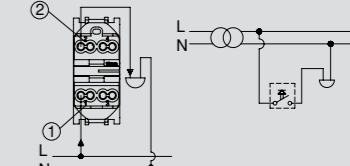



Technical Specifications	Push Button with Bell Symbol, Illuminated	Circuit Diagram
--------------------------	---	-----------------

- Controls the door bell.
- 16A, 250V~
- Push button, instant trigger
- Illuminated indicator
- Screw connection

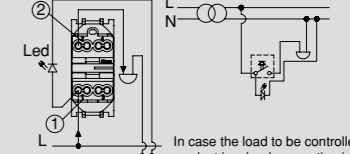

Technical Specifications	Shutter Control Switch	Circuit Diagram
--------------------------	------------------------	-----------------



- Controls up and down movement of shutters, by controlling shutter motors via single button
- 10AX, 250V~
- Two way, three positions
- Screw connection

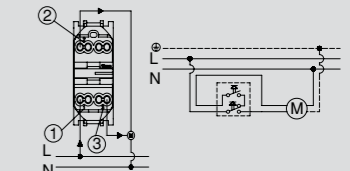

Technical Drawings and Circuit Diagrams



Emergency Push Button with Cord

- Generates control signals for external trigger circuits such as building lights with automatic timer, motion detector or automated system.
- 16AX, 250V~
- One-way
- Push button, instant trigger
- Screw connection





Double One-way Push Button

- Generates two different control signals for external trigger circuits such as motion detectors or automated systems.
- Two independent phase inputs allow connection of multiple different phases.
- 10AX, 250V~
- Double pole, single way
- Screw connection





Pro Dimmer R 300W 1M

- R type dimmer
- 300W maximum output power (R type load)
- 20W minimum output power
- Feature to use as two-way
- Feature to switch on/off at the set level of dimming

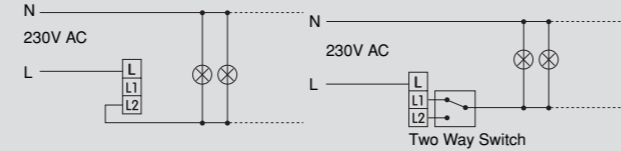



Pro Dimmer R 6-100W/VA

- R type dimmer
- 100W maximum output power (R type load)
- 6W minimum output power
- Feature to use as two-way
- Feature to switch on/off at the set level of dimming

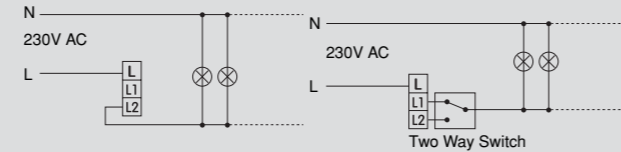



Pro Dimmer RC 20-300W/VA

- RC type dimmer
- 300W maximum output power (R type load) 300VA maximum output power 300VA (C type load)
- 20W minimum output power
- Feature to use as two-way
- Feature to switch on/off at the set level of dimming

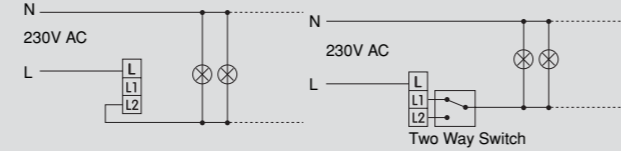


Rotary Dimmer 1-10V

- Operating temperature +5°C...+35°C
- 1V...10V control voltage
- Control current 50mA
- Switching current 5AX
- Fuse 500mAh



Universal Dimmer



- Operating voltage 230 Vac +/- 10%, 50Hz
- Switching type either leading or trailing Edge selected by
- Suitable for dimmable LEDs.
- Operating temperature 0°C...+35°C
- Load types - Incandescent lamps - HV halogen lamps - LV halogen lamps with Electronic transformer - LV halogen lamps with Ferromagnetic transformer - Dimmable LED & Dimmable CFL
- Protections for electronic short circuit & overload
- Delayed switch and central switch features
- Compliant standards EN 60669-2-1, EN 60669-1
- Control type push button

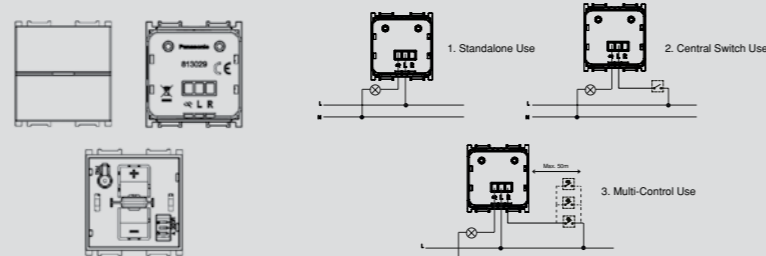

Technical Drawings and Circuit Diagrams



Socket Safety Shutter

- 16A, 250V~
- 2P
- Safety Shutter
- Screw connection





Italian Type Socket

- 13A-16A
- 2P+E
- Safety Shutter
- Screw connection





Euro-American Socket

- 13A-16A
- 2P
- Safety Shutter option
- Screw connection





Socket 2P+E, Safety Shutter

- 16A, 250V~
- 2P+E
- Safety Shutter
- Screw connection





Socket 2P+E with Lid, Safety Shutter

- 16A, 250V~
- 2P+E
- Safety Shutter
- Screw connection





UPS Socket

- 16A, 250V~
- 2P+E
- Safety Shutter
- Screw connection



Israel Type Socket



- 16A, 250V~
- Screw Terminal
- Safety Shutter



Technical Drawings and Circuit Diagrams



Technical Specifications British Type Socket Circuit Diagram

- 6A-10A-13A
- 2P+E
- Safety Shutter
- Quick connection





Technical Specifications British Type Socket Circuit Diagram

- 6A-10A-13A
- 2P+E
- Safety Shutter
- Quick connection




Technical Specifications USB-A+A Charging Socket Circuit Diagram

- 230VAC +/- 10% 50Hz
- Output 5VDC 2A (Total Output 10W)
- Operating temperature +10°C...+40°C
- Screw connection
- Over voltage protection
- Over current protection
- Over temperature protection
- Short circuit protection




Technical Specifications USB-C Charging Socket (18W PD) Circuit Diagram

- 230VAC +/- 10% 50Hz
- Output 5VDC 3A(15W) / 9VDC 2A(18W)
- Operating temperature +10°C...+40°C
- Screw connection
- Over voltage protection
- Over current protection
- Over temperature protection
- Short circuit protection




Technical Specifications USB-A+C Charging Socket (15W) Circuit Diagram

- 230VAC +/- 10% 50Hz
- Output 5VDC 3A (Total Output 15W)
- Operating temperature +10°C...+40°C
- Screw connection
- Over voltage protection
- Over current protection
- Over temperature protection
- Short circuit protection



Technical Specifications Shaver Socket Circuit Diagram

- 230V~, 50/60Hz
- 230V~/ 120V~ output voltage
- 20VA maximum load
- IP21 protection class
- Feature of not consuming energy when not in use


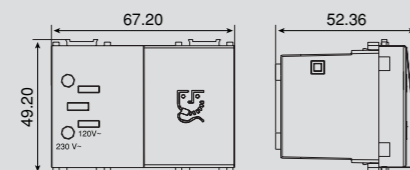


Circuit Diagram

Technical Drawings and Circuit Diagrams



Technical Specifications Phone Socket (RJ11) Circuit Diagram

- Connector structure complying with RJ11 standard has four contacts.
- Two telephone lines can be connected.
- Green and red wires are used for the 1st line, and yellow and black wires for the 2nd line.





Technical Specifications Data Socket (RJ45) Circuit Diagram

- RJ45 connector complying with standards EIA/TIA 568 A and B
- Pins on it have been marked according to both 568 A and 568 B standards.

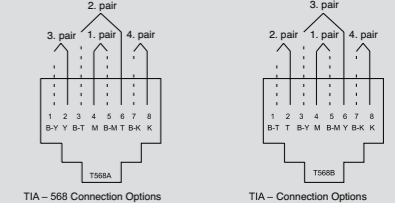


Technical Specifications British Type Phone Socket Circuit Diagram

- Pins on it have been marked according to both 431A and 631A standards.

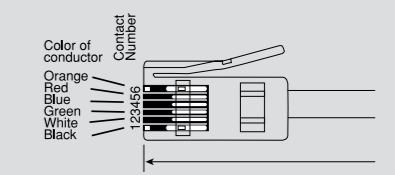


Technical Specifications USB Connector Circuit Diagram



Technical Specifications TV Socket Circuit Diagram

- Shielded, does not get affected by airborne radio signals.
- Screw type mounting.
- TV Socket, Through-pass**
- Used for broadcast distribution to multiple TV receivers where broadcast is received from UHF/VHF bands to the center via an antenna system and then distributed via inter-socket or inter-floor -in multi-storey buildings- transition.
- TV Socket, Terminated**
- Used in star-connected systems for Internet, cable TV or central satellite broadcasts. May also be used at the end of the shared antenna systems.
- TV Socket, Lossless**
- Used with independent Internet, cable TV or satellite broadcasting systems, and independent antennas.
- The sockets to be mounted after the amplifier must be 12 dB and 8 dB through-pass, terminated and lossless options to be compatible with 60-85 dBuV TV signal levels.



TV Socket (Through-pass)				
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz
IN-OUT (DB)	3,5	3,5	3,5	3,5


TV Socket (Terminated)				
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz
IN-OUT (DB)	1,6	1,7	1,8	2,0
IN-TAP (DB)	15	15	15	15,5

TV Socket (Lossless)				
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz
IN-TAP (DB)	3,5 dB	3,5 dB	3,5 dB	3,5 dB
IN-OUT (DB)	3,5 dB	5 dB	5 dB	5 dB

Technical Drawings and Circuit Diagrams

SAT Technical Specifications Satellite Socket with F Connector Circuit Diagram

- Used for receiving broadcast from the cable TV and UHF/VHF bands, and satellite.
- Satellite Socket with F Connector, Through-pass**
- Used for broadcast distribution to multiple TV receivers where broadcast is received from UHF/VHF bands to the center via an antenna system and then distributed via inter-socket or inter-floor -in multi-storey buildings- transition.
- Satellite Socket with F Connector, Terminated**
- Used in star-connected systems for Internet, cable TV or central satellite broadcasts. May also be used at the end of the shared antenna systems.
- The sockets to be mounted after the amplifier must be (10dB) transitive and terminated options to be compatible with 60-85 dBuV TV signal levels.




TV - SAT (Through-pass)									
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz	1.2 GHz	1.6 GHz	2.0 GHz	2.25 GHz	2.4 GHz
SAT IN-OUT (DB)	≤ 11.5	≤ 11.5	≤ 11.5	≤ 12	≤ 12.5	≤ 14	≤ 14	≤ 14	≤ 14.5
TV IN-OUT (DB)	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5					

SAT (Terminated)									
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz	1.2 GHz	1.6 GHz	2.0 GHz	2.25 GHz	2.4 GHz
SAT IN-OUT (DB)	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5

TV-SAT Technical Specifications TV-SAT Socket Circuit Diagram


- Shielded, does not get affected by airborne radio signals.
- Used for receiving broadcast from the Internet, interactive applications, cable TV, and UHF/VHF bands.
- TV-SAT Socket, Through-pass**
- Used for broadcast distribution to multiple TV receivers where broadcast is received from UHF/VHF bands to the center via an antenna system and then distributed via inter-socket or inter-floor -in multi-storey buildings- transition.
- TV-SAT Socket, Terminated**
- Used in star-connected systems for Internet, cable TV or central satellite broadcasts. May also be used at the end of the shared antenna systems.
- The sockets to be mounted after the amplifier must be (8dB and 11dB) transitive and terminated options to be compatible with 60-85 dBuV TV signal levels.




TV - SAT (Through-pass)									
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz	1.2 GHz	1.6 GHz	2.0 GHz	2.25 GHz	2.4 GHz
SAT IN-OUT (DB)	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5
TV IN-OUT (DB)	≤ 3.5	≤ 3.5	≤ 3.5	≤ 3.5					

TV - SAT (Terminated)									
Frequency range (f/MHz)	5 MHz	860 MHz	950 MHz	1000 MHz	1.2 GHz	1.6 GHz	2.0 GHz	2.25 GHz	2.4 GHz
SAT IN-TAP (DB)	≤ 2.5	≤ 2.5	≤ 2.5	≤ 2.5	≤ 3	≤ 3.8	≤ 4.5	≤ 5	≤ 5.5
TV IN-OUT (DB)	≤ 1.6	≤ 1.7	≤ 1.8	≤ 2.0					
TV IN-TAP (DB)	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5					


HDMI Technical Specifications Connector for HDMI Connection Circuit Diagram



VGA Technical Specifications VGA Connector Circuit Diagram




VGA Technical Specifications VGA Connector (PCB) Circuit Diagram





Technical Drawings and Circuit Diagrams

RCA Technical Specifications RCA Connector Circuit Diagram





Audio Technical Specifications Audio Socket Circuit Diagram





Audio Technical Specifications Audio Channel Selection Switch Circuit Diagram

- 5 channel selection

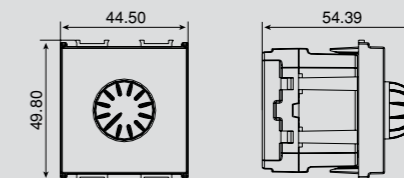



Audio Technical Specifications Volume Control Switch with Transformer Circuit Diagram

- 11-grade sound adjustment
- 2VA transformer
- Suitable for systems with line transformer
- 4x100W speakers with line transformer
- Suitable for deep cases
- Built-in relay unit for 100V sound systems and emergency announcements.

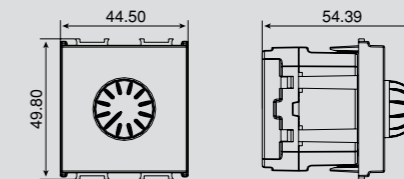



Thermostat Technical Specifications Analog Thermostat Circuit Diagram

- 230V~, 50/60Hz
- Maximum output current:
- * Changeover/normally open contact NO: 6(2)A 230V AC
- * Changeover/normally closed contact NC: 4(1)A 230V AC
- Temperature control range of ±1°C between +10°C...+30°C
- Shortest switching time 1 minute
- Operating temperature -5°C...+40°C
- Complies with standards EN 60730-1 and EN 60730-2-9

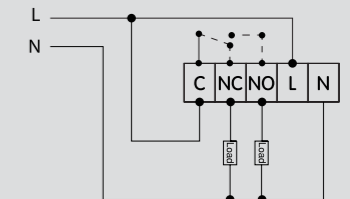

Motion Technical Specifications Motion Detector Circuit Diagram



- 230V~, 50/60Hz
- 120° horizontal sensing angle
- Time setting from 10 seconds to 10 minutes
- Operating temperature 0°C...+38°C
- Assembly height between 1 m and 2 m
- Suitable for usage with the loads at the 1100W / 1100VA values.
- Daylight setting between 0 lux - 250 lux values
- Sensing Range: 10 m max.

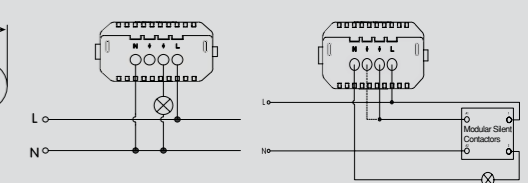

Technical Drawings and Circuit Diagrams



Technical Specifications Buzzer (Ding-Dong) Circuit Diagram

- 230V~, 50/60Hz
- 85dB minimum sound volume





Technical Specifications Buzzer Circuit Diagram

- 230V~, 50/60Hz
- 85dB minimum sound volume





Technical Specifications Direction Indicator - Arrow Circuit Diagram

- 230V~
- 5W power consumption

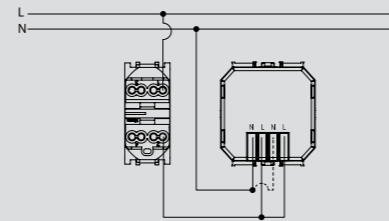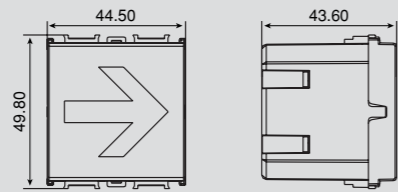



Technical Specifications Direction Indicator - Warning Circuit Diagram

- 230V~
- 5W power consumption

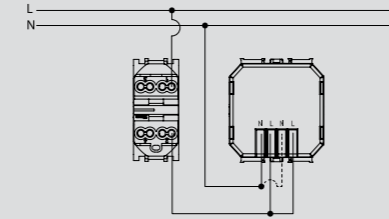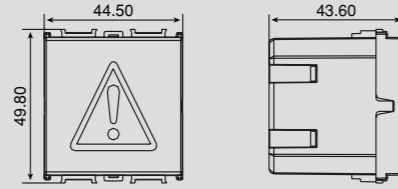



Technical Specifications Direction Indicator - Exit Circuit Diagram

- 230V~
- 5W power consumption

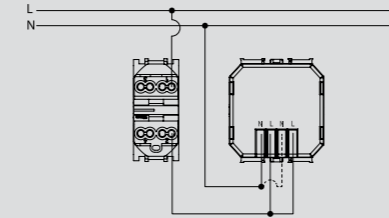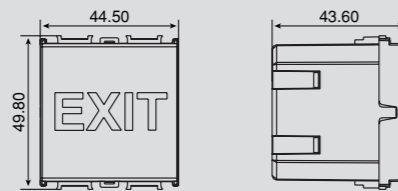

Technical Specifications Direction Indicator - Male/Female Circuit Diagram



- 230V~
- 5W power consumption

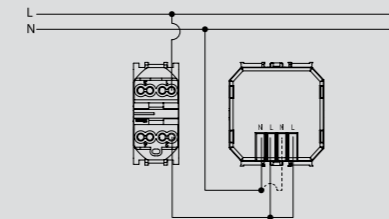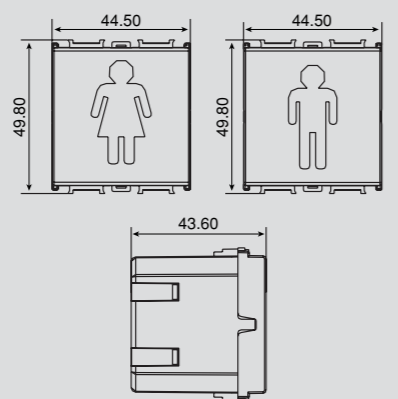

Technical Drawings and Circuit Diagrams


Technical Specifications DND-MUR Outer Unit Circuit Diagram

- 230V~
- 2.5W power consumption

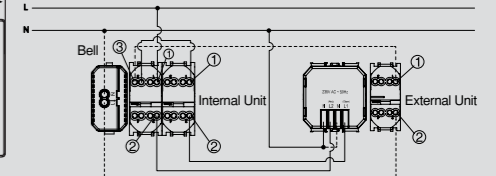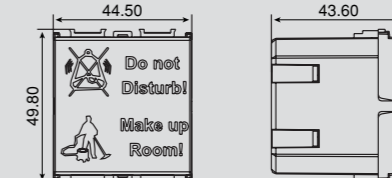

Technical Specifications DND-MUR Outer Unit with Bell Button Circuit Diagram

- Operating Voltage:** 12-24V DC±10%
- Power Consumption:** Max. 2.4W
- Operating Temperature:** 0-45°C
- Protection Class:** IP40
- Mounting Type:** Flush mounting
- Doorbell Button:** Push Button
- Doorbell Output:** 2 x 30mA
- LED Status Meanings:**
Red: Do Not Disturb (DND)
Green: Make Up Room (MUR)
Yellow: Room Occupied
- Customization Options:** Room number, hotel logo, symbols
- Standards:** EN 60669-1, IEC 60669-2-1, TS EN 62094-1
- Minimum Cable Cross Section:** 1mm²

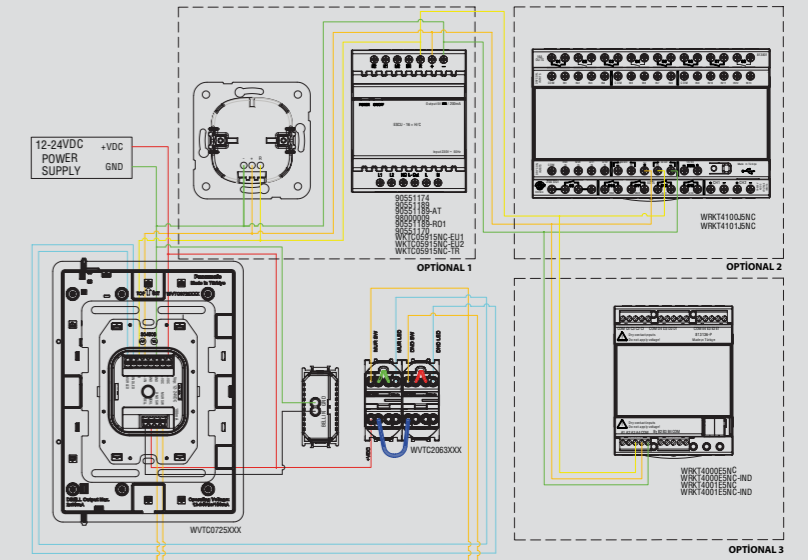

Technical Drawings and Circuit Diagrams




Technical Specifications

Energy Saver with Mechanical Switch

Circuit Diagram

- When a proper card is inserted into Energy Saver reader slot, it sends energy to relay coils to activate the electricity in the room.
- When the card is removed from the slot, room electricity is cut within 15±3 seconds. When the card is inserted into its slot, pilot lighting LED goes off.
- 250V~ operating voltage
- 0.5A maximum switching current
- Minimum diameter of connection cable is 0.50 mm², maximum length is 25 m
- 15±3 seconds shutting down delay
- Complies with standard EN60669-2-1
- Suitable for usage with all card types
- The product Energy Saver Mechanical Switch 220V~ can only be used with suitable contactors.

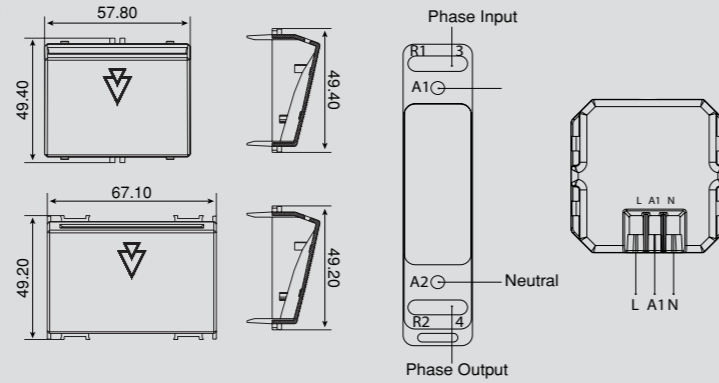


Technical Specifications

Energy Saver with Mechanical Switch

Circuit Diagram

- When a proper card is inserted into Energy Saver reader slot, it sends signal to relay unit to activate the electricity in the room.
- When the card is removed from the slot, room electricity is cut within 15±3 seconds. Delay is made by relay unit. When the card is inserted into its slot, pilot lighting LED goes off (if LED is still on, it means that the card isn't sensed).
- 5V DC- operating voltage
- The maximum switching current is defined by ESCU: 25A or 16A (ESCU 25A + VRV or ESCU 16A + VRV or ESCU 16A + 2 VRV).
- Minimum diameter of connection cable is 0.50 mm², maximum length is 25 m
- 15±3 seconds shutting down delay
- Complies with EN60669-1, EN60669-2-1 and EN55015 standards
- Suitable for usage with all card types
- The product Energy Saver Mechanical Switch 5V is suitable for usage with ESCU type relay.
- Connection cables between energy saver card reader and relay unit should be spanned within a different channel away from indoor 230V installation cables and cables with shielding feature should be used.
- Two magnetic contact inputs enable air conditioner control based on window status.

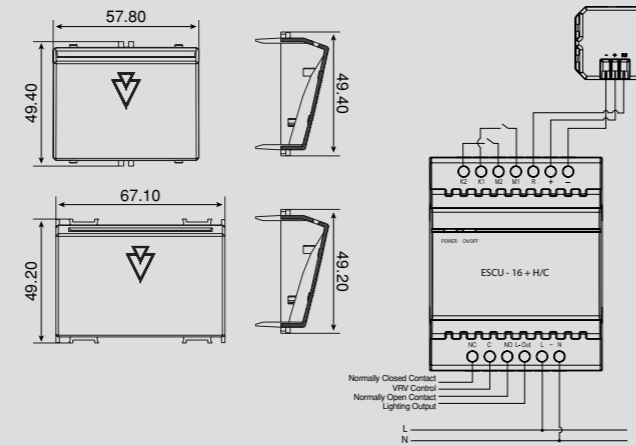


Technical Specifications

Energy Saver (13.56 MHz RF Single Protocol)




Circuit Diagram

- When a proper card is inserted into Energy Saver reader slot, it sends signal to relay unit to activate the electricity in the room.
- When the card is removed from the slot, room electricity is cut within 15 seconds. Delay is made by relay unit. When the card is inserted into its slot, pilot lighting LED goes off (if LED is still on, it means that the card isn't sensed).
- 5V DC- operating voltage
- The maximum switching current is defined by ESCU: 25A or 16A (ESCU 25A + VRV or ESCU 16A + VRV or ESCU 16A + 2 VRV).
- Minimum diameter of connection cable is 0.50 mm², maximum length is 25 m
- 15±3 seconds shutting down delay
- Complies with EN60669-1, EN60669-2-1 and EN55015 standards
- Suitable for usage with cards complying with standard ISO/IEC 14443A
- The product Energy Saver 13.56 MHz RFID is suitable for usage with ESCU type relay.
- Connection cables between Energy Saver card reader and relay unit should be spanned within a different channel away from indoor 230V installation cables and cables with shielding feature should be used.
- Two magnetic contact inputs enable air conditioner control based on window status.



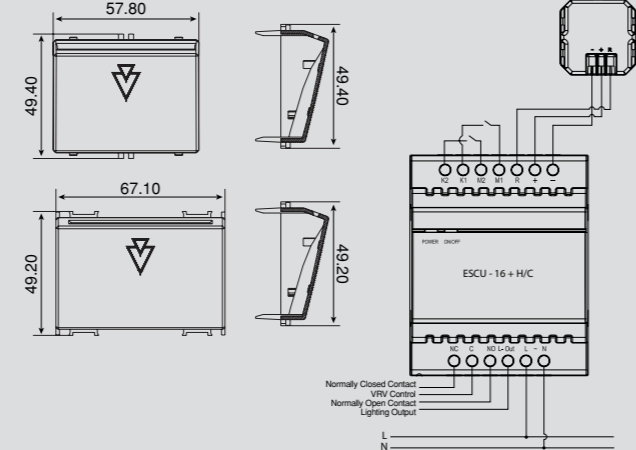


Frame Dimensions

Ultima

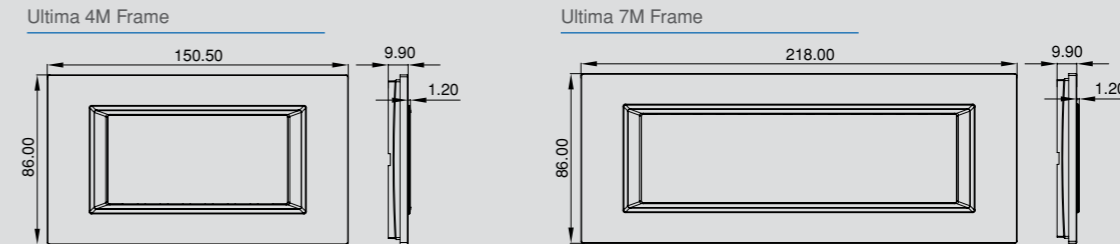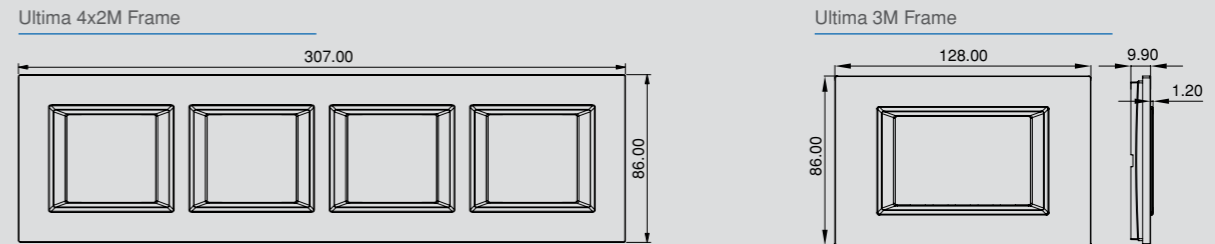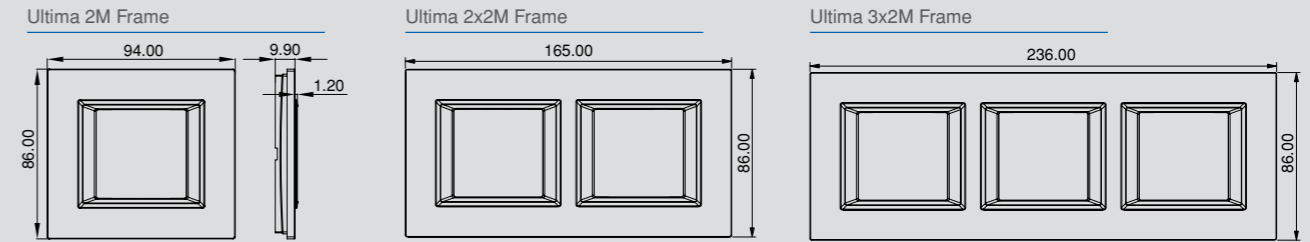


Sistema

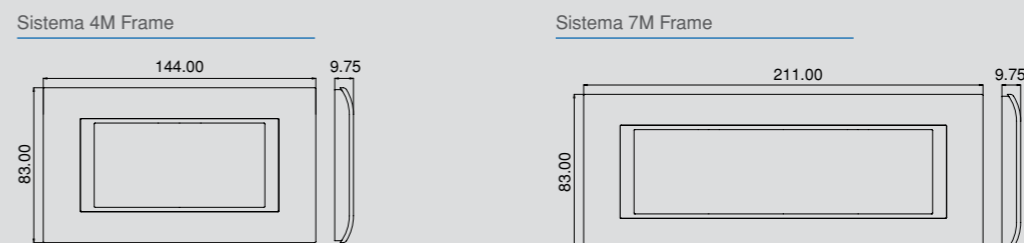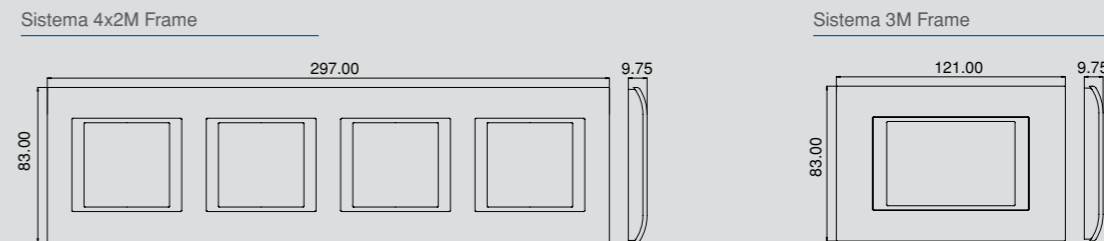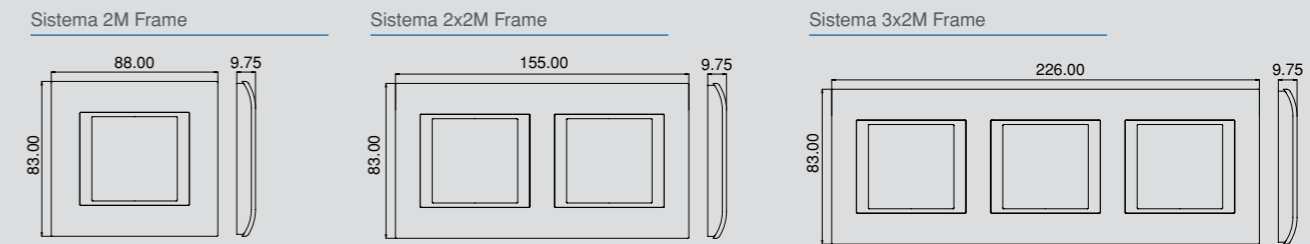


Frame Dimensions

Optima

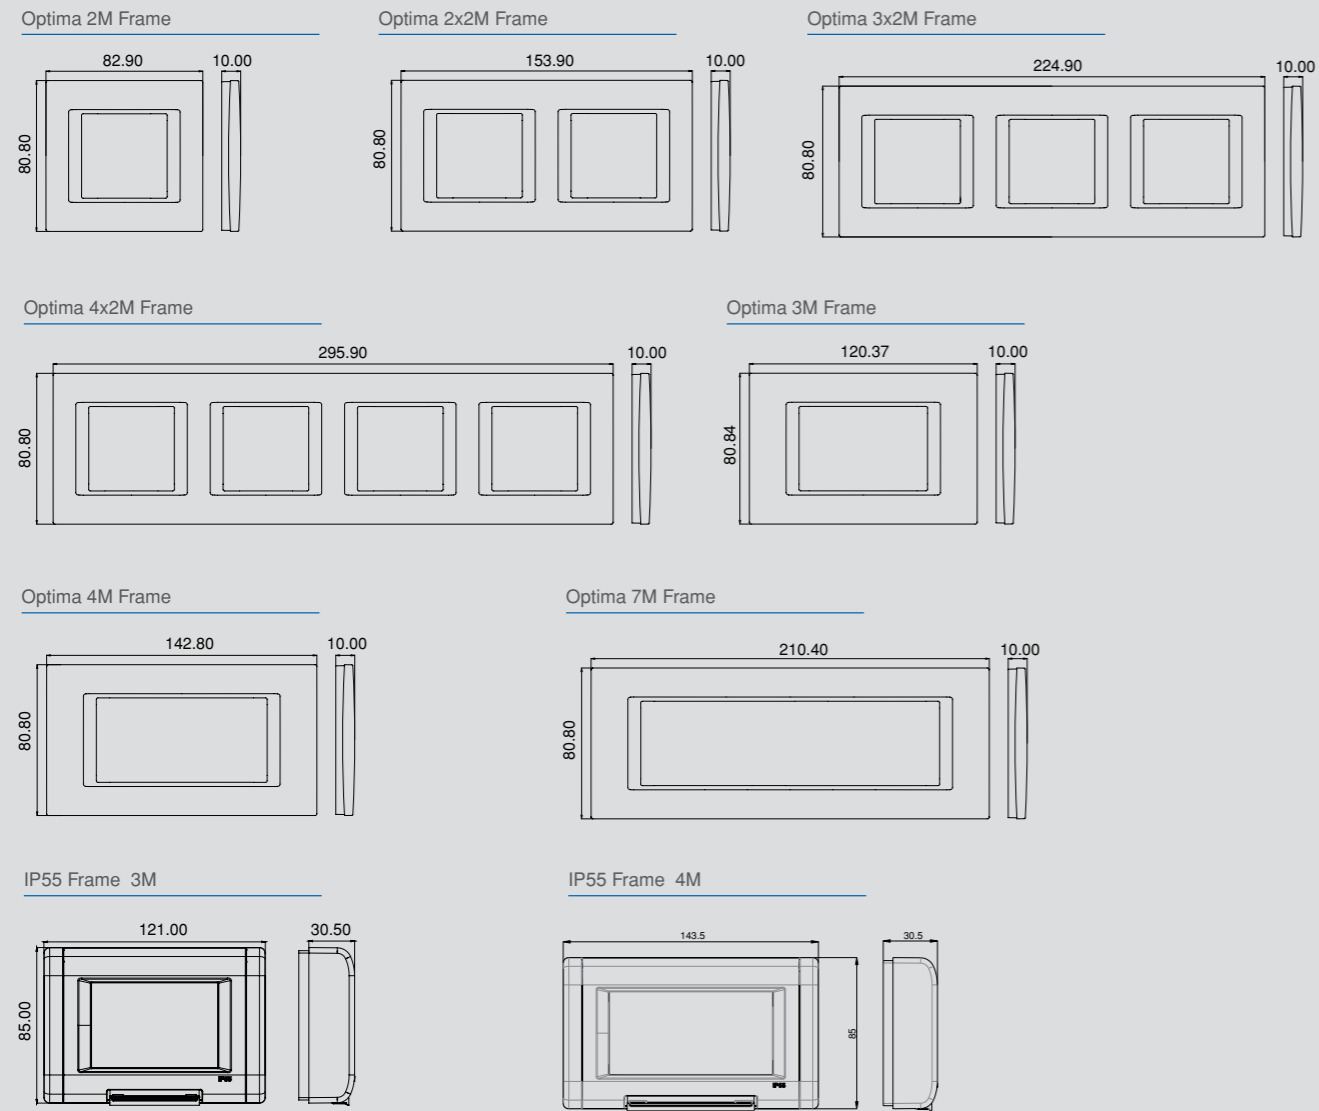


Frame Dimensions

Slenda

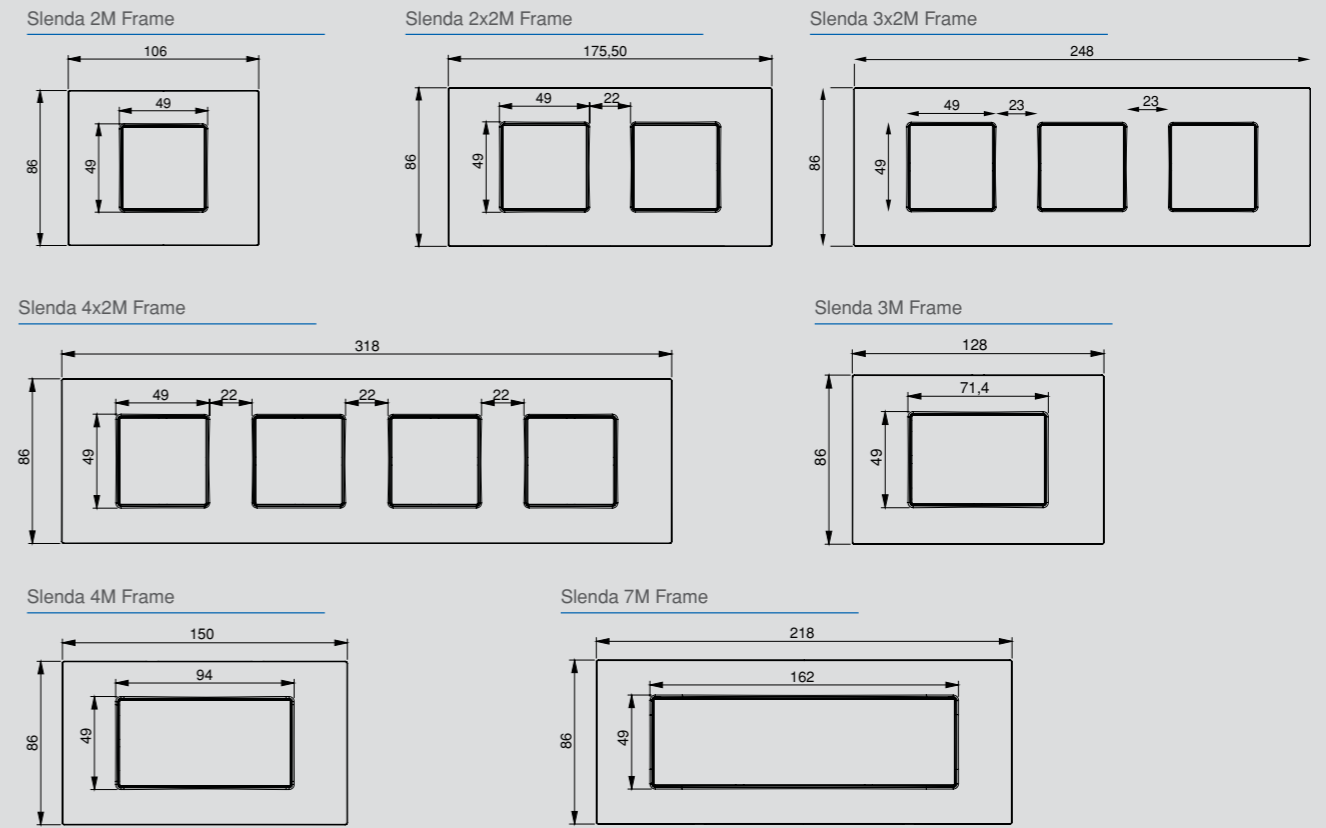


Wall Box Dimensions

Drywall Box 2M




Thea Slenda is not compatible with 2M drywall mounting box.
Compatible Series: Thea Ultima, Sistema and Optima

Wall Mount Box 2M




Compatible Series: Thea Ultima, Sistema and Optima

Drywall Box 3M




Compatible Series: Thea Ultima, Sistema and Optima

Wall Mount Box 3M




Compatible Series: Thea Ultima, Sistema and Optima

Drywall Box 4M

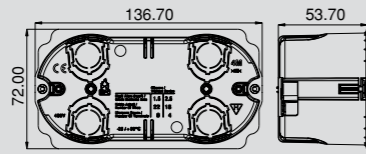


Compatible Series: Thea Ultima, Sistema and Optima

Wall Mount Box 4M

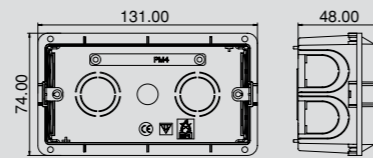


Compatible Series: Thea Ultima, Sistema and Optima

Drywall Box 7M

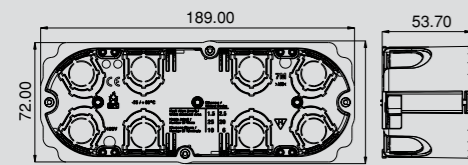

Compatible Series: Thea Ultima, Sistema and Optima


Wall Mount Box 7M

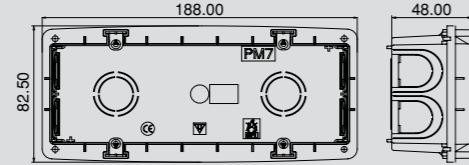


Compatible Series: Thea Ultima, Sistema and Optima

Mounting Frame Dimensions


Mounting Frame 2M

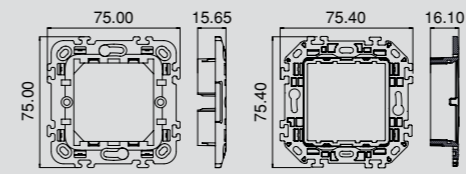


Metal Mounting Frame 2M




Mounting Frame 3M




Mounting Frame 4M

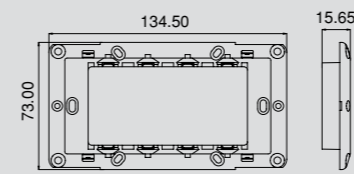


Mounting Frame 7M

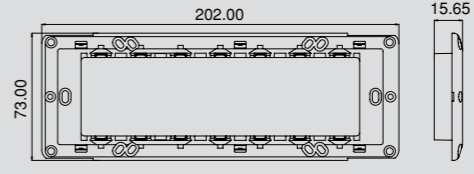


Slenda Mounting Frame 2M




Slenda Mounting Frame 3M



Slenda Mounting Frame 4M

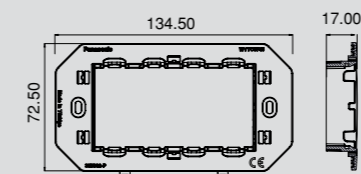

Slenda Mounting Frame 7M

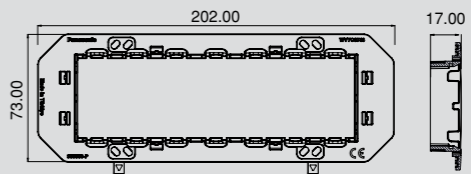

Panasonic Electric Works Elektrik San. ve Tic. A.Ş.

Abdurrahmangazi Mah. Ebubekir Cad. No: 44 34887 Sancaktepe İstanbul / Türkiye
T: +90 [216] 564 55 55 F: +90 [216] 564 55 44 ewtr.panasonic.com info@tr.panasonic.com