




## 2P+E Socket with Double USB User Manual Type A + Type C

### ASSEMBLY TYPE


Strip the wire (1) for 11 mm so that the conductor part does not remain exposed and insert the conductor part to the terminal slot by pushing the terminal press fitting (2). After the wire is placed into the terminal slot release the terminal press fitting (2) to complete the wire assembly. By rotating the wire, ensure that it's securely inserted in its place.

The claw screws (6) should be loosened and inserted the mechanism (7) into the case. Fasten the mechanism (7) into the case by tightening the claw screws (6) in a proportional way. Place the frame (5) and cover (4) on the fixed mechanism (7) and tighten the cover screw (3) with a suitable screwdriver and complete the assembly.

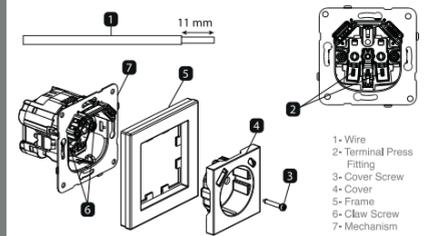

1

### CONNECTION DIAGRAM



2

### TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	OUTPUTS	OUTPUT VOLTAGE	TOTAL OUTPUT CURRENT	OPERATING TEMPERATURE
230 VAC ± 10% 50Hz	1 x USB Type A 1 x USB Type C	5 VDC ± 5%	2.1 A	+10°C...+40°C

#### ▲ ATTENTION

- The USB charging station is only used for charging purposes. It does not exchange any data.
- The USB charging socket is not suitable for use with products that are charged by over 2.1 A current.
- The total drawn current from both outputs must not exceed 2.1 A.
- Product must be placed in an enclosure with minimum 60 mm depth.
- The USB charging cable should not exceed 2m.
- Do not use in lighting.

#### OPERATING PRINCIPLE

- Connect and charge the product to the USB charging outputs with USB connecting cable.

3

#### WARRANTY CONDITIONS

- Warranty period starts as of the delivery date of the product and it is 2 years.
- Warranty covers the malfunctions likely to occur due to the manufacturing defects of the product and within the warranty period.
- The product including all of its parts is under warranty as a whole. If the product turns out to be defective, the consumer can use one of the following rights stipulated in Article 11 of Consumer Protection Law no. 6502:
  - a- Withdrawal from the contract
  - b- Demanding discount from sales fee
  - c- Demanding free repair.
  - d- Demanding the replacement of the sold one with a fungible one free from defects.
- In case the consumer chooses the right of free repair among those rights, the dealer is obliged to repair the product or have the product repaired without claiming any fee under the name of replaced part fee, labor cost or for any other reasons. The consumer can also use the right of free repair against the manufacturer or exporter. The dealer, manufacturer and exporter are jointly and severally liable for the usage of this right by the consumer.
- In case the consumer uses the right of free repair and if the product:
  - falls within the warranty period again and
  - the maximum period required for the repair is exceeded and
  - Authorized service station, dealer, manufacturer or exporter state that it's not possible to repair the product in a report, the consumer can demand the return of the product fee.
- fee discount at the ratio of the defect or the replacement with the one free of defects, if possible, from the dealer. The dealer can not reject the demand of the consumer. In case this demand is not met, the dealer, manufacturer and exporter shall jointly and severally be held responsible.
- The repair period of the product can not exceed 20 business days. This period starts on the notification of the failure on the product to the authorized service station or the dealer within the warranty period and from the date of delivery of the product to the authorized service station out of warranty period. In case of not eliminating the product malfunction within 10 business days, manufacturer or importer is obliged to dedicate another product with similar characteristics to the use of the consumer until the completion of the product repair. In case the product falls within the warranty period, elapsed time is added to the warranty period.
- Usage of the product contrary to the rules stipulated in user's manual, operating out of determined voltage, current and environmental conditions, damage on the cable connection due to the user's fault and failure of the product due to the facts arising from the fire, flood, earthquake, lightning and similar disasters are not under warranty.
- The consumer can apply to the arbitration committee for consumers or the consumer court where the consumer operations are made or in the residential area for the disputes to be occurred regarding the usage of the rights arising from the warranty.
- In case the dealer doesn't provide this certificate of warranty, the consumer can apply to the General Directorate of Consumer Protection and Market Surveillance of Ministry of Customs and Trade.

4

#### WARNING

- Ensure that the power is cut off before the assembly of the products.
- Connection and assembly of the electrical devices should be carried out only by the technical personnel having certificate of competency.
- No responsibility is assumed for the entire of the malfunction, accident and loss arising from the assembly or interference of the persons not having the competency certificate.
- Use dry or slightly damp cloth to clean the buttons, cover and frame of the product. Never use alcohol, cologne, detergent or other similar chemicals for cleaning. Do not perform wet cleaning do not contact the product with water when the product is energized.
- In case the surface to which the product is connected is dyed, store the product by removing its cover and the frames.
- Keep the product away from the damp or wet environment during the transportation and shipping.
- It is intended for indoor use only.

#### Panasonic and Environment

As Panasonic, we are aware of the contribution of a balanced relation established between human and nature to the sustainable life. Thanks to our continuous innovation and R&D studies, we prefer materials and technologies that are not affecting the environment in a negative way during the production and usage of the products starting from the designing phase. We take necessary measures to use energy and natural sources in a more efficient way.

This symbol indicates separate collection of waste electrical and electronic equipment.

#### Panasonic Customer Relations

Dear Customer,  
We believe in providing quality service to you as well as offering quality products. Therefore, you can call 444 8 456 to reach Panasonic customer relations for support regarding the products you purchased.

5



Panasonic Electric Works Elektrik San.ve Tic. A.Ş.  
Abdurrahmangazi Mah. Ebubekir Cad. No: 44  
34887 Sancaktepe / Istanbul / Turkey  
T: 0(216) 564 55 55 F: 0(216) 564 55 44

HOTLINE  
444 8456

viko.panasonic.com




## Steckdose 2P+E mit Doppel-USB Bedienungsanleitung Type A + Type C

### MONTAGEART


Die Kabel (1) längs 11 mm absetzen, so dass kein blanker Leitabschnitt im offenen bleibt und den Leiterabschnitt in die Anschlussbuchse durch Drücken des Druckteils (2) platzieren. Nachdem das Kabel in die Verbindungsbuchse platziert wurde wird das Druckteil (2) der Verbindungsenden los gelassen und somit die Kabelmontage abgeschlossen. Durch Bewegen des Kabels sicherstellen, dass es fest sitzt.

Den Mechanismus (7) durch Lockern der Hakenschrauben (6) in das Gehäuse platzieren. Hakenschrauben (6) gleichmäßig anziehen und Mechanismus (7) im Gehäuse befestigen. Rahmen (5) und Deckel (4) auf den befestigten Mechanismus (7) legen. Deckelschraube (3) mit geeignetem Schraubendreher anziehen.

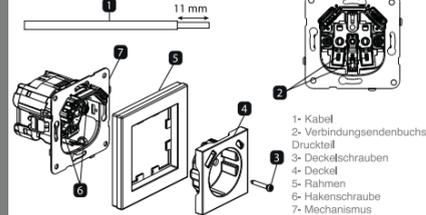

1

### SCHALTPLAN



2

### TECHNISCHE EIGENSCHAFTEN

AUSGANG	INGANGSSPANNUNG	AUSGANGSSPANNUNG	GESAMT AUSGANGSSTROM	BETRIEBSTEMPERATUR
1 x USB Type A 1 x USB Type C	230 VAC ± 10% 50Hz	5 VDC ± 5%	2.1 A	+10°C...+40°C

#### ▲ VORSICHT

- USB Ladestation darf nur zum Laden verwendet werden. Ein Datenaustausch findet nicht statt.
- USB Ladesteckdose eignet sich nicht für Produkte, die mit mehr als 2.1 A Strom aufgeladen werden.
- Gesamte Stromaufnahme bei beiden Ausgängen darf 2.1 A nicht überschreiten.
- Das Produkt ist muss in ein Gehäuse mit min. 60 mm Tiefe eingebracht werden.
- USB Ladekabel soll 2 m nicht überschreiten.
- Nur an der Beleuchtungen verwenden.

#### BETRIEBSRIN

- Das aufzuladende Gerät mit einem USB-Schnittstellenkabel mit der USB Ladesteckdose verbinden und aufladen.

3

#### GARANTIEBEDINGUNGEN

- Die Garantieleistung beginnt ab dem Lieferdatum und ist für 2 Jahre gültig.
- Die Garantie umfasst die Schäden innerhalb der Garantiedauer, die auf Produktionsfehler zurückzuführen sind.
- Sämtliche Teile dieses Produktes liegen im Garantieumfang. Im Fall, dass das Produkt Mängel vorweist, kann der Verbraucher lt. dem 11 Artikel der Gesetz-Nr. 6502 des Verbraucherschutzgesetzes von folgenden Rechten Gebrauch machen:
  - a- Den Vertrag auflösen.
  - b- Rabatt auf den Verkaufspreis verlangen.
  - c- Eine kostenlose Reparatur beantragen.
  - d- Den Austausch mit einem mangelfreien Produkt verlangen.
- Sollte der Verbraucher vom Recht der kostenlosen Reparatur Gebrauch machen, ist der Händler verpflichtet ohne eine Vergütung für Arbeitskosten, Ersatzteilkosten oder Kosten unter irgendeinem anderen Namen die Reparatur durchzuführen oder durchzuführen zu lassen. Der Verbraucher kann vom Reparaturrecht gegenüber dem Hersteller oder Importeur machen. Händler, Hersteller und Importeure sind von der Ausübung dieses Rechts gemeinsam verantwortlich.
- Wenn der Verbraucher von seinem Recht auf kostenlose Reparatur Gebrauch macht und das Produkt:
  - innerhalb der Garantiedauer nochmal einen Mangel vorweist;
  - die Reparatur die maximale Reparaturfrist überschreitet
  - Sollte von der autorisierten Servicestelle, dem Händler, dem Hersteller oder Importeur ein Bericht erstellt werden, dass eine Reparatur nicht möglich sei, kann der Verbraucher die Rückerstattung des Produktwerts, einen Rabatt in Höhe des Mangels oder falls möglich den Umtausch mit einem gleichwertigen Produkt ohne Mängel beantragen. Der Händler darf den Antrag des Verbrauchers nicht abschlagen. Von einer Nichterfüllung dieser Forderung haften der Händler, Hersteller und Importeur gesamtschuldnerisch.
- Die Reparatur des Guts darf 20 Werkstage nicht überschreiten. Diese Dauer beginnt innerhalb der Garantiefist ab Eingang der Mitteilung bei der autorisierten Servicestelle oder beim Händler, nach der Garantiefist ab dem Eingang des Produkts bei der autorisierten Servicestelle oder beim Händler. Sollte der Mangel der Ware nicht innerhalb 10 Werktagen behoben werden, wird der Hersteller oder Importeur bis zur Behebung des Mangels dem Verbraucher ein Produkt mit ähnlichen Eigenschaften zur Verfügung stellen. Sollte das Produkt innerhalb der Garantiefist Mängel vorweisen wird die Reparaturdauer der Garantiefist zugerechnet.
- Sollte ein Mangel des Produkts aufgrund einer Missachtung der Bedienungsanleitung, der angegebenen Spannung, Strom und Umgebungsbedingungen durch den Verbraucher auftreten und bei Mängel aufgrund von Feuer, Überspannung, Blitzschlag u. Ä. Katastropen liegt dies nicht im Umfang der Garantieleistung.
- Der Verbraucher kann bei Unstimmigkeiten im Zusammenhang der Nutzung von seinem Garantiebereich bei der Verbraucherschlichtstelle oder Verbraucherschlichtgericht in seinem Wohnort aufsuchen.
- Sollte der Händler den Garantieschein nicht auskündigen kann der Verbraucher sich beim Zoll- und Handelsministerium, die Generaldirektion für Verbraucherschutz und Marktüberwachung melden.

4

#### WARUNUNG

- Vor der Montage stellen Sie bitte sicher, dass das Gerät ausgesteckt ist.
- Die Anschlüsse und Montagen von elektrischen Geräten dürfen nur von Personal mit Eignungszertifikat durchgeführt werden.
- Für Mängel, Unfälle und Verluste, die Montagen und Eingriffen von Personen, die nicht im Besitz eines Fähigkeitszeugnisses sind, auftreten wird keinerlei Verantwortung übernommen.
- Die Reinigung des Produkts wie Drehknopf, Abdeckung und Rahmen mit einem trockenen oder leicht befeuchteten Tuch durchführen. Auf keinen Fall Alkohol, alkoholhaltige Flüssigkeiten u. Ä. Chemikalien verwenden. Während das Produkt am Strom angeschlossen ist, nicht mit einem feuchten Tuch reinigen und die Berührung mit Wasser vermeiden.
- Sollte die Oberfläche, an die das Produkt angeschlossen ist gestrichen werden, bewahren Sie das Produkt zusammen mit Deckel und Rahmen auf.
- Beim Tragen und während des Transports halten Sie das Produkt von feuchten und nassen Umgebungen fern.
- Nur für den Gebrauch im Innenbereich.

#### Panasonic und Umwelt

Als Panasonic, sind wir uns der Notwendigkeit eines ausgewogenen Verhältnisses zwischen Mensch und Natur für nachhaltiges Leben, bewusst. Wir bevorzugen aufgrund unserer ständigen Innovation und F&E Studien, begonnen bei der Gestaltung bis zur Herstellung und Anwendung, Materialien und Technologien die die Umwelt nicht negativ beeinträchtigen einzusetzen. Wir treffen sämtliche Maßnahmen um die Energie- und Naturquellen so effizient wie möglich zu nutzen.

Dit symbol geeft aparte afvalinzameling van elektrische en elektronische apparatuur aan.

#### Panasonic Kundenbetreuung

Sehr geehrter Kunde,  
Wir sind davon überzeugt, dass eine qualitativ hochwertige Service genauso wichtig wie qualitativ hochwertiger Produkte ist. Wenn Sie Hilfe bei unseren Produkten benötigen, können Sie sich gerne unter der Telefonnummer 444 8 456 an Panasonic Kundendienst wenden.

5



Panasonic Electric Works Elektrik San.ve Tic. A.Ş.  
Abdurrahmangazi Mah. Ebubekir Cad. No: 4  
34887 Sancaktepe / Istanbul / Türkei  
T: 0(216) 564 55 55 F: 0(216) 564 55 44

HOTLINE  
444 8456

viko.panasonic.com