


V:KO
by Panasonic

Pacific

Komütatör + Topraklı Priz Çocuk Korumalı, Çabuk Bağlantılı Kullanma Kılavuzu

VİDASIZ (ÇABUK BAĞLANTI) KABLO MONTAJI


Kablo boyu (1), iletkin kısmı açıkta kalmayacak şekilde 11 mm açılarak, iletkin kısmı bağlantı ucu yuvasına (2), bağlantı ucu baskı parçasına (3) bastırılarak yerleştirilir. Kablo, bağlantı ucu yuvasına (2) yerleştirildikten sonra, bağlantı ucu baskı parçası (3) kırılarak ve kablo montajı tamamlanır. Kabloyu hareket ettirecek sıkı bir şekilde yerine yerleştirdikten sonra, kablo montajının tamamlanması ile mekanizma ve contalar yuvalarına yerleştirilir. Üst gövdeyi yerine oturtarak sabitleme vidalarını ile alt gövdeye sabitleyiniz. Harici olarak satılmakta olan etiket kiti, etiketsiz ürünler için etiket penceresi çıkartılarak yerine takılabilir.

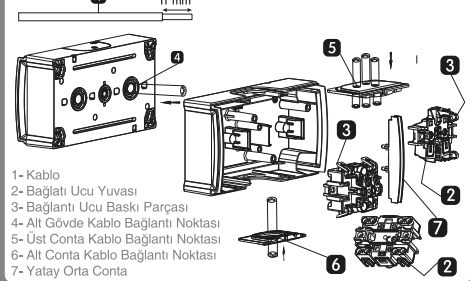

1

MONTAJ ŞEKLİ

Anahtar düğmesinin ve priz kapağına (1) çekerek çıkarınız. Üst gövdeyi (3), sabitleme vidalarının (2) gevşek olduğundan emin olduktan sonra, alt gövdenin (6) çekerek ayırınız. Yapılacak olan kablo girişine göre, uygun contayı (4) seçiniz ve çıkarınız. Kabloyu, conta (4) üzerinde belirtilmiş yerden bastırarak geçiniz. Alt gövdeyi (6), duvar üzerinde ürünün montajı için açılmış olan deliklere yerleştiriniz ve vida ile monte ediniz. Alt gövdeyi (6), duvara monte ederken "OPEN HERE" olarak belirtilmiş olan tahliye deliğinin (7) alta gelmesini dikkat ediniz. "OPEN HERE" olarak belirtilen ve " " işaretli ile gösterilen tahliye deliğinin (7), sıvı bir cisim ile delinerek açılması herhangi bir nedenden ötürü, gövde içerisine girmiş olan suyun tahliyesi için önemlidir.

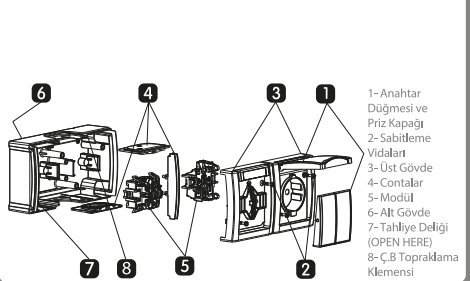

2

TEKNİK ÖZELLİKLER

- 10 AX, 250 V -
- Çabuk bağlantılı montaj tipi


Beyan akımı	Anma kesit	En büyük iletkin çapı	En büyük bükülgen iletkin çapı
10A	1 mm ² - 2,5 mm ²	2,13 mm	2,21 mm

- Kullanım ihtiyacına göre etiket takılabilme imkanı,
- Duvara en yakın noktadan bükülmeden kablo girişine izin veren, patentli conta sistemi ile üç farklı boyutta kablo ile kullanılabilirlik,
- Sadece kabloların bastırılması ile montajın yapılmasını sağlayan tekli ve çoklu kablo girişine uygun, kabloyu saran ve sızdırmazlık özelliğine sahip çift enjeksiyonlu contalar.


ÇALIŞMA PRENSİBİ

Bir lamba veya lamba grubunun bir noktadan kumandasını sağlar.

BAĞLANTI ŞEMASI



DEVRE ŞEMASI



3


TEKNİK ÖZELLİKLER

- 16A, 250 V -
- Çabuk bağlantılı montaj tipi
- IP54 koruma sınıfı
- IP 54 özellikli priz kapağı kapalı olduğunda sağlanmaktadır.


İlgili standartlara göre priz bağlantıları için kullanılan bakır kablo kesitleri :

Beyan akımı	Anma kesiti	En büyük iletkin çapı
16 A	1,5 mm ² - 2,5 mm ²	2,13 mm

BAĞLANTI ŞEMASI



DEVRE ŞEMASI



4

GARANTİ KOSULLARI

- Garanti süresi, ürünün teslim tarihinden itibaren bir yıl ve süresi 2 yıldır.
- Garanti, garanti süresi içerisinde ve ürünün imalat hatalarından dolayı meydana gelebilecek arızalar kapsamına girer.
- Ürünün teslim tarihinden itibaren geçen süre, tamam garanti kapsamındaki ürünün ayıklanıp ayıklanmadığına bağlıdır. 6502 sayılı Tüketicinin Korunması Hakkında Kanunun 11. maddesinde yer alan:
- -Sadece üretim hatası nedeniyle, b- Satın alımdan itibaren itibaren,
- - Üretilmiş olan malın, c- Satıştan önce bir mesul ile değiştirilmesi isteme, haklarından birini kullanma bittir.
- Tüketicinin bu haklardan yararlanması için onayın hakları kapsamına girmez. İşçilik masrafları, değiştirilen parça bedeli ve diğer herhangisi bir ad altında hiç bir ücret talep etmeksizin malın onarımını yapmak veya yaptırmaya yükümlüdür. Tüketicinin onayın hakları üretici veya ithalatçıya karşı kullanılabilir. Satıcı, üretici ve ithalatçı talebinin bu haklara kullanılmadığını teyit edebilir.
- Tüketicinin, ücretsiz onarım hakkına kullanılması halinde malın:
- - Garanti süresi içerisinde tekrar arızalanması,
- - Tamir için gereken azalet süresinin artması,
- - Tamir mümkün olmadığında yerli servis istasyonu, satıcı, üretici veya ithalatçı tarafından bir raporla belirlenmesi durumunda tüketici malın bedelini talep edebilir.
- - Aynı oranda bedel indirimini veya imkanı varsa malın ayarız mülki ile değiştirilmesini talep edebilir. Satıcı, tüketicinin talebini reddedemez. Bu talebin yerine getirilmediği durumda satıcı, üretici ve ithalatçı müşterilerin sorumludur.
- Malın tamir süresi 20 iş gününü geçemez. Bu süre, garanti süresi içerisinde mala ilişkin arızanın yerli servis istasyonuna veya satıcıya bildirme tarihinden, garanti süresi dışında ise malın yerli servis istasyonuna teslim tarihinden itibaren başlar. Malın arızanın 10 iş gününü içerisinde giderilememesi halinde, üretici veya ithalatçı malın tamamını tamir etmemişse kadar, benzer özelliklere sahip başka bir mal tüketicinin kullanımına tahsis etmek zorundadır. Malın garanti süresi içerisinde arızalanması durumunda, tamirinde geçen süre garanti süresine eklenir.
- Ürünün kullanılması sırasında yer alan hususlarda yerli kullanımlarına, belirlenen güvenlik, alarm ve çevre şartları dışında çalıştırılması, kablo bağlantılarının kullanılması kaynaklı zarar görmesi ve ayrıca ürünün yangın, sıvı, deprem, yıldırım vb. felaketlerden kaynaklı olarak durumlarından etkilenerek arızalanması garanti kapsamına girmez.
- Tüketicinin doğan hukukunun kullanılmasına ile ilgili olarak güçlebilecek uygulamalarda yerleşim yerinin bulunduğu veya tüketici işyerinin bulunduğu yerdeki tüketici hakları mevzuatına veya tüketici mahkemesine başvurulabilir.
- Satıcı tarafından bu garanti belgesine verilmesi durumunda, tüketici Garanti ve Tavaz Beklenmiş Tüketicinin Korunması ve Piyasa Gözetimi Genel Müdürlüğüne başvurabilir.

5

UYARI

- Ürünlerin montajından önce enerjinin kesilmesi olduğundan emin olunuz.
- Elektrikli cihazların bağlantıları ve montajı yalnızca yetenekli bir kişi tarafından yapılmalıdır.
- Yetenekli bir kişiye sahip olmayan kişiler montaj ve müdahaleleri sırasında oluşabilecek arıza, kaza ve kayıplardan tamamiyi hiçbir sorumluluk kabul edilmez.
- Ürünlerin düğme, kapak ve çevre temizliği kuru veya hafif nemli bez ile yapılır. Alkol, kolonya, deterjan vb. kimyasallar kesinlikle kullanılmamalıdır. Ürün enerji altında iken elektrik temizliği yapılmaz ve ürünü su ile temas ettirmeyiniz.
- Ürünün bağlı olduğu yüzeyin boyanması durumunda, ürünün kapak ve çevrelerini sökerek muhafaza ediniz.
- Tazime ve nakliye sırasında ürünü nemli veya ıslak ortamlardan uzak tutunuz.

Panasonic ve Çevre

Panasonic olarak, insan ve doğa arasında kurulan dengeli bağları sürdürülebilir yaşama sağlayacağı katılan bilincindedir. Sürdürülebilir inovasyon ve AP-GE çalışmalarını ile ürünlerimizin tasarım aşamalarından başlayarak üretimi ve kullanımını sürdürülebilir olmaya çalışmaktayız. Malzeme ve teknolojileri tercih ediyoruz. Enerji ve doğal kaynaklarımızın daha verimli kullanılmasına için gerekli önlemleri alıyoruz.

♻️ Sembol elektrik ve elektronik ekipmanların ayrı olarak toplanması gerektiğini gösterir.

Panasonic Müşteri İlişkileri

Değerli Müşterimiz,
Sizlere kaliteli ürünler sunmak kadar, kaliteli hizmet vermenin de önemine inanıyoruz. Bu sebeple almış olduğunuz ürünlerimiz ile ilgili destek ihtiyacınızda, Panasonic Müşteri İlişkilerine 444 8456 numaralı telefonumuzu arayarak ulaşabilirsiniz.

6


V:KO
by Panasonic

Pacific

2-Gang One-Way Switch&Socket 2P+E, Child Protection, Quick Connection User Manual

SCREWLESS TERMINAL- WIRING


Strip the wire (1) for 11 mm so that the conductor part to the terminal slot (2) by pushing terminal press fitting (3). After the wire is placed into terminal slot (2), release the terminal press fitting (3) to complete the wire assembly. By rotating the wire, ensure that it's securely inserted in its place. Upon completion of wire assembly, insert the mechanisms and seals in their places as required. Seat the upper case and fix it to lower case using fixing screws. In products without any label, a label kit sold separately can be inserted after removing the label window.

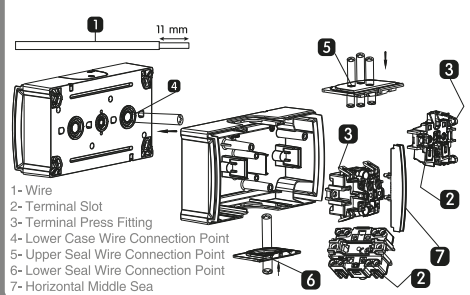

1

INSTALLATION

Pull and remove switch button and socket cover (1). Ensure that fixing screws (2) are loosened and pull out the upper case (3). After the wire is placed into terminal slot (2), release the terminal press fitting (3) to complete the wire assembly. By pressing to the point specified on the seal (4), place the lower case (6) to the holes bored for the assembly of the product on the wall and mount through screw. When mounting the lower case (6) to the wall, ensure that bleed port (7) specified as "OPEN HERE" is aligned downwards. Drilling and opening bleed port (7) specified as "OPEN HERE" is aligned downwards. Drilling and opening bleed port (7) specified as "OPEN HERE" is aligned downwards. Drilling with a sharp object for whatsoever is important to discharge the water inside of the case.

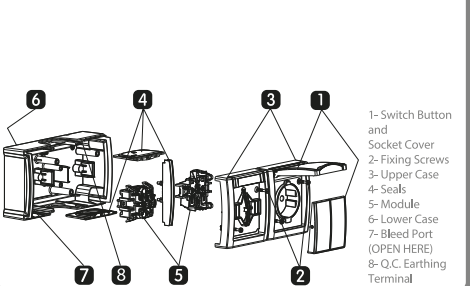

2

TECHNICAL SPECIFICATIONS

- 10 AX, 250 V -
- Screwless Terminal
- Copper wire sections used for switch connections according to the relevant standards.


Rated current	Nominal section	Biggest conductor diameter	Biggest flexible conductor diameter
10A	1 mm ² - 2,5 mm ²	2,13 mm	2,21 mm

- Opportunity to attach label according to usage need,
- Availability with wires in three different dimensions through patented seal allowing wire entry from the closest point of the wall without bending
- Seals with duplicate injection wrapping the wire with impermeability suitable for single and multiple wire entries that allow assembly by only pressing the wire


OPERATING PRINCIPLE

Enables that a lamp or a lamp group is controlled from a point.

CONNECTION DIAGRAM



CIRCUIT DIAGRAM



3


TECHNICAL SPECIFICATIONS

- 16A, 250 V -
- Screwless Terminal
- IP54 protection class
- IP 54 feature is provided when the socket cover is closed.


Copper wire sections used for socket connections according to the relevant standards.

Rated current	Nominal section	Biggest conductor diameter
16 A	1,5 mm ² - 2,5 mm ²	2,13 mm

CONNECTION DIAGRAM



CIRCUIT DIAGRAM



4

WARRANTY CONDITIONS

- Warranty period starts at the delivery date of the product and it is 2 years.
- Warranty covers the malfunctions likely to occur due to the manufacturing defects of the product and within the warranty period.
- The product including all of its parts is under warranty as a whole. If the product turns out to be defective, the consumer can use one of the following rights stipulated in Article 11 of Consumer Protection Law no. 6502:
- - Without fee from the contract
- - Demanding free repair.
- - Demanding the replacement of the sold one with a fungible one free from defects.
- - In case the consumer chooses the right of free repair among those rights, the dealer is obliged to repair the product or have the product repaired without charging any fee under the name of repaired part fee, labor cost or for any other reasons. The consumer can also use the right of free repair against the manufacturer or exporter. The dealer, manufacturer and exporter are jointly and severally liable for the usage of this right by the consumer.
- - In case the consumer uses the right of free repair and if the product:
- - fails within the warranty period again and
- - the maximum period required for the repair is exceeded and
- - Authorized service station, dealer, manufacturer or exporter state that it's not possible to repair the product in a report, the consumer can demand the return of the product fee,
- - free discount at the ratio of the defect or the replacement with the one free of defects, if possible, from the dealer. The dealer can not reject the demand of the consumer. In case this demand is not met, the dealer, manufacturer and exporter shall jointly and severally be held responsible.
- The repair period of the product can not exceed 20 business days. This period starts on the notification of the failure on the product to the authorized service station or the dealer within the warranty period and from the date of delivery of the product to the authorized service station out of warranty period. In case of not eliminating the product malfunctions within 10 business days, manufacturer or importer is obliged to dedicate another product with similar characteristics to the use of the consumer until the completion of the product repair. In case the product falls within the warranty period, elapsed time is added to the warranty period.
- Usage of the product contrary to the rules stipulated in user's manual, operating out of determined voltage, current and environmental conditions, damage on the cable connection due to the user's fault and failure of the product due to the facts arising from the fire, flood, earthquake, lightning and similar disasters are not under warranty.
- The consumer can apply to the arbitration committee for consumers or the consumer court where the consumer operations are made or in the residential area for the disputes to be occurred regarding the usage of the rights arising from the warranty.
- In case the dealer doesn't provide this certificate of warranty, the consumer can apply to the General Directorate of Consumer Protection and Market Surveillance of Ministry of Customs and Trade

5

WARNING

- Ensure that the power is cut off before the assembly of the products.
- Connection and assembly of the electrical devices should be carried out only by the technical personnel having certificate of competency.
- No responsibility is assumed for the entire of the malfunction, accident and loss arising from the assembly or interference of the persons not having the competency certificate.
- Use dry or slightly damp cloth to clean the buttons, cover and frame of the product. Never use alcohol, cologne, detergent or other similar chemicals for cleaning. Do not perform wet cleaning do not contact the product with water when the product is energized.
- In case the surface to which the product is connected is dyed, store the product by removing its cover and the frames.
- Keep the product away from the damp or wet environment during the transportation and shipping.

Panasonic and Environment

As Panasonic, we are aware of the contribution of a balanced relation established between human and nature to the sustainable life. Thanks to our continuous innovation and R&D studies, we prefer materials and technologies that are not affecting the environment in a negative way during the production and usage of the products starting from the designing phase. We take necessary measures to use energy and natural sources in a more efficient way.

This symbol indicates separate collection of waste electrical and electronic equipment.

Panasonic Customer Relations

Dear Customer,
We believe in providing quality service to you as well as offering quality products. Therefore, you can call 444 8456 to reach Panasonic customer relations for support regarding the products you purchased.

6

V:KO
by Panasonic

Panasonic Electric Works Elektrik San.ve Tic. A.Ş.
Abdurrahmangazi Mah. Ebubekir Cad. No: 44
34887 Sancaktepe / İstanbul / Türkiye
T: 0(216) 564 55 55 F: 0(216) 564 55 44

DANIŞMA HATTI
444 8456
ewtr.panasonic.com
info@tr.panasonic.com

V:KO
by Panasonic

Panasonic Electric Works Elektrik San.ve Tic. A.Ş.
Abdurrahmangazi Mah. Ebubekir Cad. No: 44
34887 Sancaktepe / İstanbul / Türkiye
T: 0(216) 564 55 55 F: 0(216) 564 55 44

HOTLINE
444 8456
ewtr.panasonic.com
info@tr.panasonic.com

6

