


## PRODUCT DATASHEET

# Panasonic



<b>Product Name :</b>	KNX POWER SUPPLY PS132 - 320mA/PS164 - 640mA
<b>Product Code :</b>	WRKT20305NC-WRKT20315NC
<b>Product Series :</b>	Thea IQ

### Technical Specifications:

<b>KNX Interface</b>	TP1
<b>Configuration Mode</b>	S-Mode
<b>Bus Voltage</b>	28-32 V DC (SELV)
<b>Supply Voltage</b>	230 V AC
<b>Mains frequency</b>	50/60 Hz
<b>Installation type</b>	DIN rail
<b>Width in space units</b>	4 modules at 18 mm
<b>Ambient temperature</b>	-5°C ... + 45 °C
<b>Storage temperature</b>	-10 °C ... + 55 °C




### Wiring Diagram:

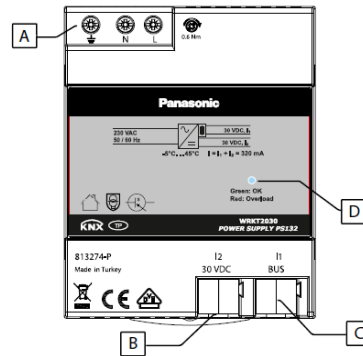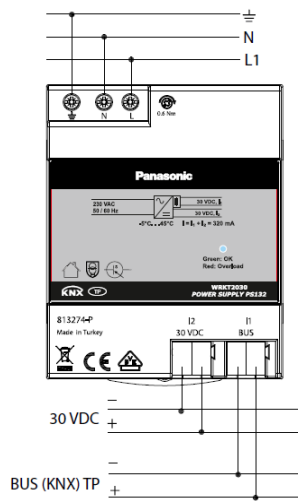

- A. AC Supply voltage terminals  
 B. 30 VDC output connector  
 C. BUS (KNX) TP output connector  
 D. Status LED  
 Status LED States:  
 Green: BUS & 30 VDC are OK.  
 Red: For 320 mA Iout > 500 mA (Overload)  
 For 640 mA Iout > 900 mA (Overload)

### Dimensions:

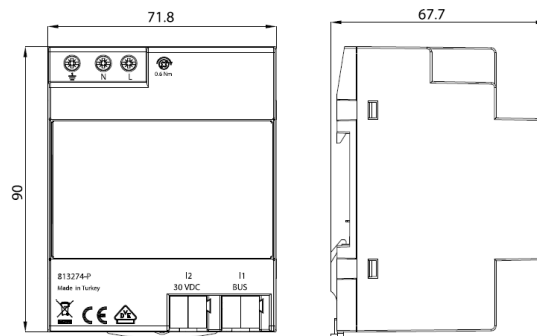

Panasonic Electric Works Elektrik. San. ve Tic. A.Ş.  
 Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44  
 ewtr.panasonic.com