


PRODUCT DATASHEET

Panasonic

| | |
|--|---|
| Product Name : | KNX DALI GATEWAY DL101 - DL102 |
| Product Code : | WRKT22245NC-WRKT22255NC |
| Product Series : | Thea IQ |
| Technical Specifications: | |
| <i>Voltage range</i> | 230 V AC, 50/60 Hz |
| <i>Power consumption total via mains</i> | Max. 8W (at 230 V AC and max. load) (for 1 ch.) Max. 12W (at 230 V AC and max. load) (for 2 ch.) |
| <i>KNX voltage</i> | DC 21 ... 32 V SELV |
| <i>KNX current consumption</i> | <5 mA |
| <i>KNX interface</i> | TP1 |
| <i>Configuration mode</i> | S-Mode |
| <i>Humidity</i> | 5...93% (non-condensing) |
| <i>Operation temperature</i> | -5°C ... +45 °C |
| <i>Storage temperature</i> | -10 °C ... +55 °C |
| <i>Transportation temperature</i> | -25 °C ... +70 °C |




Product Components:

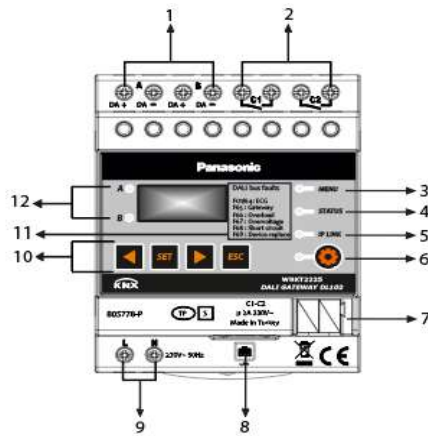

- 1- DALI Channels (There is no B channel in the single channel option.)
- 2- Relay Outputs*
- 3- Menu Active LED
- 4- Status LED
- 5- IP Connection Status LED
- 6- KNX programming button and LED
- 7- KNX bus terminal
- 8- Ethernet connector
- 9- Power Supply 230V AC, 50Hz
- 10 - Manual operation buttons
- 11- DALI Bus faults description
- 12- 7 segment display and channels LED (Channel's LED turn on, when channel is selected)

Dimensions:

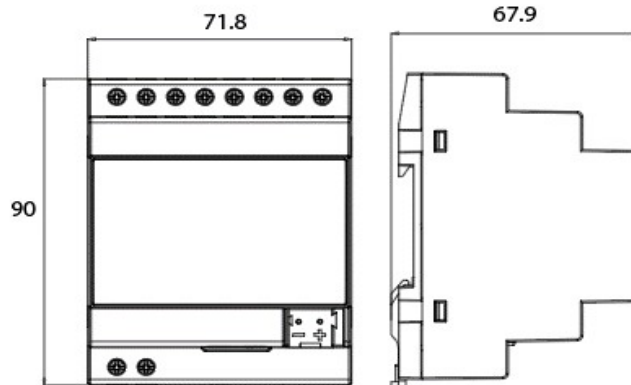

Panasonic Electric Works Elektrik.San. ve Tic. A.Ş.
Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44
ewtr.panasonic.com