


PRODUCT DATASHEET

Panasonic

Product Name :	KNX USB GATEWAY TP
Product Code :	WRKT25325NC
Product Series :	Thea IQ
Technical Specifications:	
Supply voltage	21 ... 30 V DC (SELV)
Current consumption	< 20mA (USB) <5mA (KNX TP)
Width in space units	2 modules at 18 mm
Storage temperature	-20 °C ... + 60 °C
Operating temperature	-5°C ... + 45 °C
Type of protection	IP 20 to EN60529
Safety class	III to IEC 60664-1



Connectors, Buttons and LED's Description:

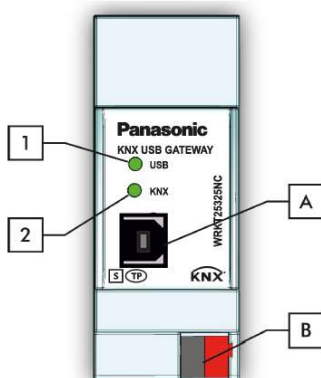

A. USB connector

B. KNX TP connector

1. State USB

green: USB connection OK

(blinking indicates telegram traffic)


red: USB Suspend Mode

2. Bus state KNX TP

green: KNX TP line OK

(blinking indicates telegram traffic)

Installation and Maintenance:

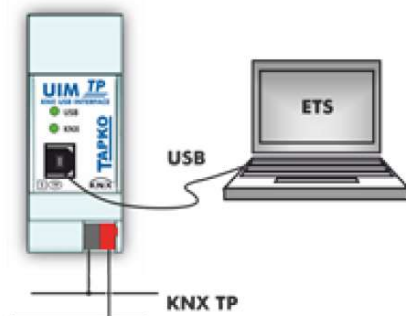

- The housing must not be opened
- Protect the device from moisture, dirt and damage
- The device needs no maintenance
- If necessary, the device can be cleaned with a dry cloth
- In the case of damage (at storage, transport) no repairs may be carried out by unauthorized personnel
- Configuration details and ETS database:

Panasonic Electric Works Elektrik.San. ve Tic. A.Ş.

Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44

ewtr.panasonic.com