

PRODUCT DATASHEET


**Panasonic**

<b>Product Name :</b>	KNX IP INTERFACE IP100 , KNX IP INTERFACE I/O IP164
<b>Product Code :</b>	WRKT92105NC-WRKT92115NC
<b>Product Series :</b>	Thea IQ
<b>Technical Specifications:</b>	
<i>Operating voltage</i>	DC 21-32 V (from KNX bus)
<i>Mounting (IEC60715)</i>	35 mm top-hat rail (TH35)
<i>Mounting width</i>	DIN rail 72mm (4 modules)
<i>IP connector</i>	Ethernet (RJ45, female)
<i>KNX bus connection</i>	KNX connector (243-211 Wago)
<i>Ambient temperature</i>	-5°C ... + 45 °C
<i>Storage temperature</i>	-10°C ... + 55 °C
<i>Ambient humidity</i>	5...93% (non-condensing)
<b>Characteristics</b>	



- KNX IP Tunneling
- KNX TP
- 4 IP tunneling connection with individual address
- IP filtering for tunneling connections
- Parameter setting via web interface
- Firmware update via web interface
- DIN rail
- ETSS compatible
- Input and Output objects (only for IP164)
- Power supply via KNX bus(Works without external power supply)
- APDU length 15 byte
- KNXnet/IP, DHCP, AutoIP, HTTP, UDP/IP, TCP/IP, ARP, ICMP and IGMP protocol support

**Dimensions:**

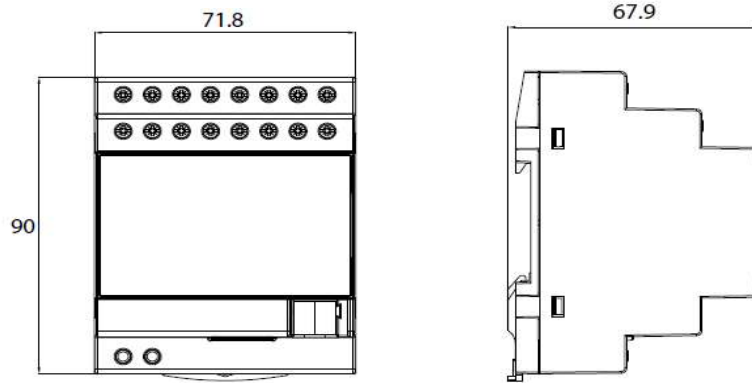

Panasonic Electric Works Elektrik.San. ve Tic. A.Ş.  
 Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44  
 ewtr.panasonic.com