

# Panasonic



**INTELLIGENT MONITORING FOR  
SAFER BUSINESS  
PANASONIC FIRE ALARM SOLUTIONS  
TECHNOLOGY FOR A BETTER WORKING WORLD**



# CHOOSE PANASONIC FIRE SOLUTIONS AND YOU'RE CHOOSING WORLD-CLASS PROTECTION

**With more than 30 years' experience in the development of fire alarm solutions, and installations in over 15,000 buildings, Panasonic provides technology that's designed not just to alert you to the outbreak of fire, but also to pre-warn you of conditions that could lead to a fire.**

**A track record of safety and success** – our fire solutions are proven in many industries, delivering high levels of accuracy and few false alarms.

**Lower total cost of ownership** – because our solutions achieve outstanding levels of reliability and are easily installed, maintained and managed, the cost to the end user is reduced over the lifetime of the system.

## Smart flexible detector algorithms

Our smart flexible detector algorithms improves the detection functionality, and is now available equipped with Artificial Intelligence capability. There are five algorithms inside the detector, which selects the correct mode automatically by evaluating and 'learning' from the surrounding environment.

## Improved detector chamber with extremely fine mesh net

Following extensive research into detector reliability, Panasonic identified that 78% of unwanted alarms were caused by dust or insects – both capable of passing through traditional detector meshnets. We have reduced our mesh net to just 0.3mm, reducing cases of unwanted alarms dramatically.

## Constant smoke contamination monitoring

Our fire systems are constantly monitoring the levels of contamination in the detectors, and has sensitivity compensation for contamination. This lowers ongoing maintenance costs and maintains a high and consistent level of protection.

## Tested not once, but twice

Smoke detectors are life-saving devices. So every Panasonic smoke detector is tested twice with real smoke during the production process. We never use statistical, theoretical testing methods, ensuring the highest possible levels of reliability.

## High noise immunity

Panasonic NMAST communication technology provides high noise immunity – ideal for installations in heavy industry, power plants, hospitals and universities where noise can have a negative impact on fire detection.

## Multi-master configuration

Control panels can be connected in a multi-master arrangement, with up to 30 panels allowing wide distribution throughout premises.

## WEB server integration

With Panasonic fire alarm systems, it's possible to install a WEB server inside the control panel, allowing full access over TCP/IP.

## THE COMPREHENSIVE SOLUTION TO A CRITICAL BUSINESS RISK

While all buildings are required by law to install some form of fire detection system, it takes more than a simple alarm to provide the security and safety a business requires. Panasonic's solutions are designed to provide all-round protection in every professional setting – and are now available in combination with Panasonic security camera systems. This combination of alarm sensors and Full HD video images creates a comprehensive security and monitoring solution that safeguards both premises and the continued operation of large-scale businesses and organisations.

### Solutions for healthcare



To protect patients, staff, premises and the life-saving equipment inside, Panasonic has developed a range of fire alarm solutions with the precise requirements of hospitals in mind. A range of programmable functions, intelligent algorithms and the ability to monitor multiple zones mean early, safe and reliable fire detection and prevention is achieved, in the most critical of environments.

### Solutions for data centers



Data centers and service halls often contains the most critical assets in any operation. Protection of these business critical systems require the earliest possible detection of hazards, which is exactly what Panasonic can provide.

### Solutions for logistic



Complex storage solutions, dusty environments, big variations in temperature and airflow and sometimes even freeze rooms with temperatures down to -25 degrees.

These are challenges where Panasonic's robustness has proved to be ideal



## Solutions for industry



Time lost due to either the outbreak or false reporting of fire can be, at best, damaging and, at worst, disastrous for the managers of industrial sites and power plants. Thanks to the flexible, multi-zone, intelligent capabilities of Panasonic's fire solutions, however, this risk can be mitigated, with systems capable of operating in the specific and often unique surroundings of industrial premises.

## Solutions for transportation



Real-time security evaluation is essential in crowded places such as airports and train stations to provide the necessary prevention to ensure a high quality service that provides safety to millions of daily passengers. Panasonic technologies adapt to each environment offering a more customised solutions.

## Solutions for education



With the challenge of maintaining safety and ongoing operation across multiple sites, universities require the best possible fire detection and prevention solutions. Panasonic provides both, with proven reliability and cutting-edge technology able to deliver the level of protection needed to safeguard students and staff, and avoid the unnecessary expense and inconvenience of nuisance alarms.

## FIRE ALARM SYSTEMS EBL512 G3 AND EBL128



EBL512 G3



EBL 128

### General

EBL512 G3 and EBL128 are analog addressable fire alarm systems which are used with analog addressable detectors, inputs and outputs as well as conventional detectors. Both fulfill the EN54 standards: EN54 part 2 (Control and indicating equipment) and EN54 part 4 (Power supply) and EN54 part 13 (System compatibility). Detectors, manual call points, and general input and output units for free programmable customer specific functions can be connected to the COM loops.

### EBL512G3 and EBL128 – a unique concept for early and safe detection without nuisance alarms

EBL512 G3 and EBL128 are a new generation of fire alarm systems. With a unique functionality in cooperation with detectors that adapt to the surrounding environment, self-diagnostic and interactivity, the system is suitable for most premises.

Each analog smoke detector in the system is individually adapted to the surrounding environment. The sensitivity of each analog detector is constant in spite of the individual contamination or background particle level. The long-term changes are, for example, distinguished from the short-term changes of a smouldering fire.

Intelligent alarm algorithms to detect smouldering fires. The self-diagnostics function is a result of a unique algorithms that detects every deviation from the accurate normal condition in the electronics and in the detection chamber.

The interactivity function uses information from one, two or more detectors in the system to increase reliability in detection of a real fire.

A family of state of the art analog detectors gives the c.i.e accurate and noise-free information about occurrence of smoke and/or temperature changes in the installation.

Both control panels are prepared for remote surveillance and operation. Data can be access from PC, tablet, or smart phone.



## FIRE ALARM SYSTEMS EBL512 G3 AND EBL128



**The EBL512 G3 and EBL128 fire alarm systems have a set of functions that meet the most stringent requirements relating to fire detection and fire prevention measures.**

- A large number of fire detection algorithms are supported by the system and can be set individually for each analog detector.
- Alert annunciation. The output for the alarm transmitter can be delayed for immediate on-site investigation of a fire alarm.
- Detectors, zones, programmable outputs and outputs for the alarm transmitter can be individually disabled.
- Internally and/or externally controlled time channels. E.g. one or more alarm points may be disabled via an external timer.
- User programmable outputs can be programmed in a very flexible way enabling control of sirens, fire doors, extinguishing systems, etc.
- External fire brigade panels can be connected to each c.i.e.
- Display of the actual system status in a PC or Tablet via a web-server connected to an intranet (LAN) or the Internet. In the event of fire alarm, service signal, etc. an e-mail can be sent to the appropriate personnel. Also provides two-way communication to an external computer system like a building management system or security systems.



## FIRE ALARM SYSTEMS CONTROL AND INDICATING EQUIPMENT C.I.E



### EBL512 G3

#### Features

EBL512 G3 – the third generation of the intelligent analog addressable system.

Up to 1020 addresses – of which up to 512 can be used for alarm points (EN-54), remaining addresses can be used for alarm devices, I/O units etc.

Redundant network for up to 30 control units with two TLON networks.

Supports auto-addressing to simplify commissioning.

#### Type numbers

**5000**: EBL512 G3 c.i.e. with or without a printer. Supplied with a standard mounting plate approved for an incombustible wall (e.g. concrete).

**5001**: EBL512 G3 c.i.e. Control panel without front or display. To be used in networks with at least one type 5000.

Supplied with a standard mounting plate approved for an incombustible wall (e.g. concrete).

**4580**: 8 zones expansion board (8 zone line inputs for conventional detectors)

**4581**: 8 relays expansion board (8 programmable relay outputs)

**4583**: Supervised in- and outputs expansion board. 3 outputs and 5 inputs

**5089**: Connection cable for up to six expansion boards (4580-4583)

**1598**: Web-server for connection of the fire alarm system to an intranet or the internet

**5090**: TLON connection board – required for a TLON network. Two boards in each c.i.e. for redundant network

**5020**: Mounting plate for 19" mounting rack. For one 5000 / 5001

**5013**: Cabinet for drawings







## EBL128

### Features

EBL128, an intelligent analog addressable fire alarm system for up to 255 addresses.

Supports auto-addressing to simplify commissioning.

### Type numbers

**4550**: EBL128 c.i.e. (255 addresses)

**4552**: RS485 transceiver component, for up to four display units, i.e. external fire brigade panels 1826 /1828, external presentation unit 1728 and/or alert annunciation units 1735 / 1736.

**4580**: 8 zones expansion board. (8 zone line inputs for conventional detectors).

**4581**: 8 relays expansion board (8 programmable relay outputs).

**4551**: Expansion board holder. (For four 4580 or four 4581 expansion boards.)

**5089**: Connection cable for up to six expansion boards (4580-4583)

**1598**: Web-server for connection of the fire alarm system to an intranet or the internet.



# FIRE SECURITY

## FIRE ALARM SYSTEMS DISPLAY UNIT



**DISPLAY UNIT 5054**

### Features

- Selectable function as Presentation unit, Firebrigade panel, or Alert annunciation unit
- Color touch screen 10.1"
- Multi language support
- Up to 30 units can be connected to a C.I.E and up to 1 200 meters to the farthest display unit

### Type numbers

**5054:** Display unit



**DISPLAY UNIT METAL CABINET 5055**

### Features

- Metal cabinet for build in of Display unit 5054
- Key required for safety
- To be used in Fire brigade panel applications

### Type numbers

**5055:** Display unit metal cabinet

## FIRE ALARM SYSTEMS ANALOG / ADDRESSABLE DETECTORS



### ANALOG BASE 3312

#### Features

- Common base for the different analog detectors
- Screw connectors including output for external LED
- Label holder recess

#### Type numbers

**3312:** Analoge base

**3390:** Label holder (100 holders per packet, excluding labels)

**3391:** Labels for 3390 (10 sheets á 132 labels)



### ANALOG BASE 3312F / FL

#### Features

- Common base for the different analog detectors
- Fast connectors
- Label holder recess
- Available in grey or white

#### Type numbers

**3312F:** Analog base with fast connectors for the COM loop

**3312FL:** Analog base with fast connectors for the COM loop and fast connector for external LED (2218)

**3390:** Label holder (100 holders per packet, excluding labels)

**3391:** Labels for 3390 (10 sheets á 132 labels)



## ANALOG MULTIDETECTOR 4400

### Features

- State of the art detector for highest safety
- Detection by combination of smoke and heat
- Nuisance alarms reduced by up to 46% by using Advanced mode:
  - Variable sensitivity and time delay based on smoke and temperature changes just before and after fire alarm level has been reached.
  - A learning function will ensure that the most suitable fire alarm algorithm is always used.
  - High-tech mesh net prevents dust and insects to enter the detection chamber
  - Automatic service signal to minimise maintenance costs

### Type numbers

**4400:** Analogue multi detector



## ANALOG PHOTOELECTRIC SMOKE DETECTOR 4401

### Features

- State of the art detector for highest safety
- Nuisance alarms reduced by up to 46% by using Advanced mode:
  - Variable sensitivity and time delay based on smoke changes just before and after fire alarm level has been reached.
  - A learning function will ensure that the most suitable fire alarm algorithm is always used
  - High-tech mesh net prevents dust and insects to enter the detection chamber
  - Automatic service signal to minimise maintenance cost

### Type numbers

**4401:** Analog photoelectric smoke detector



## ANALOG MULTI DETECTOR WITH CO 4402

### Features

- State of the art detector for highest safety
- Detection by heat, heat and smoke, or smoke and CO
- Distinguished between a real fire and nuisance alarm with highest security available
- Ideal for environments with non-fire smoke, for example theaters, discotheques and oil-mist
- High-tech mesh net prevents dust and insects to enter the detection chamber
- Automatic service signal to minimise maintenance cost

### Type numbers

**4402:** Analog multi detector with CO



## ADDRESSABLE SOUNDER BASE 3379

### Features

- For installation where an alarm device is required in the same room as a detector
- Three different sound or priority levels
- Connected directly on the COM loop
- Programmable for any kind of trigger condition

### Type numbers

**3379:** Addressable sounder base



## ANALOG HEAT DETECTOR 3308

### Features

- State of the art detector for highest safety
- Algorithms for classes A1, A2S, and BS included
- Selections via EBLWin
- Possible to have both regular and alternative algorithms for highest security without nuisance alarms

### Type numbers

**3308:** Analog heat detector



## ENCLOSED ANALOG HEAT DETECTOR 3309

### Features

- State of the art detector for highest safety
- Algorithms for classes A1, A2S, and BS included
- Selection via EBLWin
- Waterproof - IP67
- Possible to have both regular and alternative algorithms for highest security without nuisance alarms
- Connectors for external indicator

### Type numbers

**3309:** Enclosed analog heat detector

## FIRE ALARM SYSTEMS ANALOG / ADDRESSABLE DETECTORS



### WIRELESS PHOTOELECTRIC SMOKE DETECTOR 4611

#### Features

- Ideal in buildings where it is difficult to hide cables and where extensions are required
- Built-in sounder
- Up to 170 m transmission range (open air) and 6 years battery life
- Highly flexibility: Up to 256 wireless detectors per c.i.e.

#### Type numbers

**4611:** Wireless photoelectric smoke detector



### WIRELESS MANUAL CALL POINT 4614

#### Features

- Ideal in buildings where it is difficult to hide cables and where extensions are required
- Up to 170 m transmission range (open air) and 6 years battery life
- Highly flexibility: Up to 4 base stations on each COM loop and up to 16 wireless units on each base station

#### Type numbers

**4614:** Wireless manual call point



### ADDRESSABLE BASE STATION FOR WIRELESS UNITS 4620

#### Features

- Ideal in buildings where it is difficult to hide cables and where extensions are required
- Up to 170 m transmission range (open air)
- Highly flexibility: Up to 4 base stations on each COM loop and up to 16 wireless units on each base stations
- Built-in short circuit isolator
- The base station has two built-in antennas

#### Type numbers

**4620:** Addressable Base Station for wireless units



### WIRELESS SNIFFER 4613

#### Features

- Highly recommended as a help during planning, installation, and commissioning of the wireless system
- Checks the background noise
- Checks the signals between a base station and its wireless units
- Verifies that the standard EN54-25 is fulfilled

#### Type numbers

**4613:** Wireless sniffer

## UNITS FOR HAZARDOUS (EX) AREAS - ANALOG DETECTORS



### INTRINSICALLY SAFE (IS) ANALOG PHOTOELECTRIC SMOKE DETECTOR 2840

#### Features

- Addressable intrinsically safe optical smoke detector for fire detection in hazardous areas
- Up to 20 detectors can be connected to each IS barrier unit
- Six advanced alarm algorithms available
- 



### INTRINSICALLY SAFE (IS) ANALOG HEAT DETECTOR 2841

#### Features

- Addressable intrinsically safe heat detector for fire detection in hazardous areas
- IP66/67 for outdoor use or in humid areas
- Up to 20 detectors can be connected to each IS barrier unit
- Three standard heat detection algorithms available



### INTRINSICALLY SAFE (IS) BARRIER UNIT 2842

#### Features

- Barrier unit for addressable intrinsically safe fire detectors in hazardous areas
- Barrier unit connects directly on the loop and is mounted outside Ex area
- Up to 20 detectors can be connected to each IS barrier unit
- IP66/67 for outdoor use or in humid areas

**2840:** Intrinsically safe Analog photoelectric smoke detector

**2841:** Intrinsically safe Analog heat detector

**2842:** Intrinsically safe Barrier unit (including five compression glands)

**2843:** Intrinsically safe back-box for 2840 and 2841. Including two compression glands.

## FIRE ALARM SYSTEMS ANALOG / ADDRESSABLE ASPIRATING DETECTORS



### ASPECT ADDRESSABLE - GRIZZLE DETECTOR AE2010G-P

#### Features

- Extremely reliable in humid and dusty environments
- Self calibrating without any need for manual adjustments
- Up to 200 meter pipe length, easily dimensioned with the help of a PC program
- Installation and monitoring by smartphone app
- Constant and high sensitivity - Class B

#### Type numbers

**AE2010G-P**: Aspect Addressable-Grizzle



### VULCAN CYCLONE FILTER VF 250 com

#### Features

- Installed before ASPECT to remove both dust and condensation from the sampled air before it enters the detection chamber
- Used in rooms with extreme amounts of dust

#### Type numbers

**VF 250 com**: Vulcan cyclone filter



## THUB - MOUNTING CONSOLE

### Features

- Avoid dirt into detector during building phase
- Pre-install the pipeline
- Easily snap-on ASPECT when pipeline installation is ready
- Built-in water reservoir (2cl) with automatic heating to evaporate the water

### Type numbers

**THUB:** Mounting console



## ELOCLEAN

### Features

- Used for easy and safe cleaning of aspiration pipes by air pressure
- ELOCLEAN is intended for installations with extremely dusty environments.
- The cleaning process automatically runs every seven days
- The process can also be started manually

### Type numbers

**ELOCLEAN:** Cleaning of aspiration pipes





## PIPES

### Features

- An internal Ra value of 1.6 contributes to avoid buildup of dust in the pipeline, and to ensuring optimal functionality with respect to transportation of smoke
- No glue is needed, as the socket is conical and supplied with a sealing agent inside.

### Type numbers

**PL 252P/253P**: Plastic pipes 13 pieces x 4 meters

**AL 250**: Aluminium pipe 4 meters

**SK 252/253**: Socket with a pre-glued inside for simple and fast mounting of the pipes

**BE 252/253**: 90°, bend with a pre-glued inside for simple and fast mounting



## ELOCUT

### Features

- The pipes are delivered in 4 m segments that may be cut to length where needed to minimise waste. To ensure clean cuts with no burrs, use the ELOCUT cutting tool.

### Type numbers

**ELOCUT**: Pipe cutter



## SNIFFER SN 258 M

### Features

- Sniffers are the extended arms of the pipeline, able to be stretched through ceilings from church lofts and such. This way, the pipeline may be hidden, and the system appears as virtually invisible.
- A outer steel screen to protect from mice and other pets.

### Type numbers

**SN258 M**: Sniffer 0.75 meter sampling point. With outer steel screen

**SN253 P**: Sniffer 3 meter sampling point



## EXHAUST KIT AU002

### Features

- For leading exhaust air back into rooms to balance the air pressure
- Reduces noise from the detector fan down to 45dB
- Used in rooms with very high amount of dust

### Type numbers

**AU002**: Exhaust kit

## FIRE ALARM SYSTEMS CONVENTIONAL DETECTORS / UNITS FOR ZONE LINE INPUTS



**COMBINATION HEAT  
DETECTOR 4318**

### Features

- State of the art combination heat detector
- Both fixed temperature and rate-of-rise function Class A1R

### Type numbers

**4318:** Combination heat detector, class A1 R



**PHOTOELECTRIC SMOKE  
DETECTOR 4452**

### Features

- State of the art detector for highest safety
- Nuisance alarms reduced by up to 46% by using variable sensitivity and time delay based on smoke changes just before and after fire alarm level has been reached
- A learning function will ensure that the most suitable fire alarm algorithm is always used
- High-tech mesh net prevents dust and insects to enter the detection chamber

### Type numbers

**4452:** Photoelectric smoke detector



**BASE 2324**

### Features

- Common base for conventional detectors
- Screw terminals for easy installation of any cable type
- External indicator (LED) can be connected to the base
- Built-in LED that is activated when the detector goes into alarm stage

### Type numbers

**2324:** Base (for conventional detectors)

## FIRE ALARM SYSTEMS CONVENTIONAL DETECTORS / UNITS FOR HAZARDOUS AREAS



**INTRINSICALLY SAFE MANUAL CALL POINT 2814**

### Type numbers

**2814 MCP1A-R470SGIS:** Intrinsically safe manual call point (incl back-box and transparent protection flap)

### UNITS FOR HAZARDOUS (EX) AREAS - CONVENTIONAL DETECTORS

#### Features

- The intrinsically safe manual call point is connected to a Galvanic isolator (2820)
- The Galvanic isolator (2820) can be connected to a conventional zone line input or to an I/O unit 3361 connected to a COM loop

### Type numbers

**2822:** Isolated zone interface (including waterproof box and four compression glands)

**2820 MTL5061:** Galvanic isolator (including waterproof box and four compression glands)



**ENCLOSED HEAT DETECTOR 6295, 6296, 6297, 6298**

### Features

- State of the art detector for highest safety
- IP67 for outdoor use or in humid areas
- High temperature range for difficult environments
- Fixed alarm temperatures (60/80/100/120°C)
- Intrinsically safe for hazardous areas with ambient temperatures up to 65°C

### Type numbers

**6295:** Enclosed heat detector, class A2 S

**6296:** Enclosed heat detector, class B S

**6297:** Enclosed heat detector, class C S

**6298:** Enclosed heat detector, class E S

# FIRE SECURITY

## FIRE ALARM SYSTEMS ADDRESSABLE COM LOOP UNITS



**ADDRESSABLE MANUAL CALL POINT WITH ISOLATOR 4433**

### Features

- Built-in short circuit isolator
- Attractive design compliant with EN54-11
- Test key for routine testing without breaking the glass element
- Protection against accidental operation

### Type numbers

**4433**: Addressable manual call point with isolator

**2347**: Replacement glass (10 pcs.)

**2348**: Replacement polycarbonate cover (10 pcs.)



**ADDRESSABLE MANUAL CALL POINT 4439**

### Features

- Built-in short circuit isolator
- Attractive design compliant with EN54-11.
- IP rating IP66
- Test key for routine testing without breaking the glass element
- Protection against accidental operation

### Type numbers

**4439**: Addressable manual call point

**2347**: Replacement glass (10 pcs.)

**2348**: Replacement polycarbonate cover (10 pcs.)



**I/O UNIT WITH ISOLATOR 4461**

### Features

- Built-in isolator
- One Zone line input
- One monitored input
- One Optocoupler input
- Two Relay outputs
- IP65 housing

### Type numbers

**4461**: I/O unit with isolator



**DUAL INPUT UNIT WITH ISOLATOR 4462**

### Features

- Built-in isolator
- Two monitored input
- IP65 housing

### Type numbers

**4462**: Dual input unit with isolator



## EXTERNAL POWER SUPPLY 4466

### Features

- Monitored for mains, charging, and communication errors
- Space for two expansion boards of type 4464 and 4585
- Built in short circuit isolator
- Automatically 4 A output at fire alarm
- Space for 7.2 Ah batteries inside housing
- Up to 42 Ah in external battery cabinet (5014)

### Type numbers

**4466:** External power supply

**5014:** Cabinet for batteries

**4464:** 2 voltage outputs board

**4585:** COM-loop repeater



## COM-LOOP REPEATER 4585

### Features

- One new 350mA loop per expansion board
- To be mounted in external power supply 4466
- Supports auto-addressing
- Up to 16 extra COM loop per control unit
- Up to 1100 m long extra loop



## 2 VOLTAGE OUTPUTS BOARD 4464

### Features

- Expansion board for external power supply
- To be mounted in external power supply 4466
- Supports auto-addressing
- 2 monitored voltage outputs (2 A each)
- 1 special voltage output for fire door closing
- 1 generic input

## FIRE ALARM SYSTEMS

### ADDRESSABLE COM LOOP UNITS - ALARM DEVICES



**ADDRESSABLE WALL VAD WITH ISOLATOR 4480**

#### Features

- Built-in short circuit isolator
- Flash rate 0.5 Hz or 1 Hz
- Coverage 2.4 x 5 x 5 meters
- Connected directly on the COM loop
- Available in red or white

#### Type numbers

**4480**: Addressable wall VAD with isolator



**ADDRESSABLE CEILING VAD WITH ISOLATOR 4481**

#### Features

- Built-in short circuit isolator
- Flash rate 0.5 Hz or 1 Hz
- Coverage 3 x Ø7.3 meters
- Connected directly on the COM loop
- Available in red or white

#### Type numbers

**4481**: Addressable ceiling VAD with isolator



**ADDRESSABLE VAD WITH SIREN AND ISOLATOR 4482**

#### Features

- Built-in short circuit isolator
- Flash rate 0.5 Hz or 1 Hz
- Coverage 2.4 x 5 x 5 meters
- High sound output but low current consumption
- Seven different tones and three priority levels
- Connected directly on the COM loop
- Available in red or white

#### Type numbers

**4482**: Addressable VAD with siren and isolator



**ADDRESSABLE SIREN WITH ISOLATOR 4487**

#### Features

- Built-in short circuit isolator
- High sound output but low current consumption
- Seven different tones and three priority levels
- Connected directly on the COM loop
- Available in red or white

#### Type numbers

**4487**: Addressable siren with isolator

## FIRE ALARM SYSTEMS DETECTOR - ACCESSORIES



### EXTERNAL INDICATOR (LED) 2218

#### Features

- Selectable light intensity makes it ideal for both analog and conventional detectors
- Low power consumption
- For wall or flush mounting

#### Type numbers

**2218:** External indicator (LED)



### ADDRESSABLE LOCAL ALARM ACKNOWLEDGE UNIT 4445

#### Features

- Eliminates unnecessary alarms in the system and to the fire brigade
- Suitable for apartments or similar locations
- Installed together with a smoke detector and a sounder base or a wireless detector
- If the detector goes into alarm the sounder is activated and the LED is lit. The user pushes the green button within 30 seconds (configurable) and then gets 3 minutes (configurable) to ventilate the smoke from the room

#### Type numbers

**4445:** Addressable local alarm acknowledge unit



### LIGHT INDICATOR 4383

#### Features

- The indicator is used as a complement to audible alarm devices
- No cabling required
- Light is visible 360°
- One External Indicator (LED) can be connected to the base
- Programmable for any kind of trigger condition

#### Type numbers

**4383:** Light indicator



## FIRE ALARM SYSTEMS DETECTOR - ACCESSORIES



### LABEL HOLDER 3390

#### Type numbers

**3390**: Label holder (100 holders per packet, excluding labels)

**3391**: Labels for 3390 (10 sheets à 132 labels)



### DUCT DETECTOR CHAMBER UG-4 6377

#### Features

- One-pipe air sampling system Uniguard Superflow
- Patented veturi pipe and duct housing
- Easy service and maintenance
- Test hole in cover
- the venturi pipes are available in 3 lengths; 0.6, 1.5, and 2.8 meter

#### Type numbers

**6377**: UG-4 duct detector chamber - incl standrd mounting accessories

**6380-06**: UG-4 pipe 0.6 m

**6380-15**: UG-4 pipe 1.5 m - incl plastic end gasket and rubber gasket TET 26-35

**6380-28**: UG-4 pipe 2.8 m - incl plastic end gasket and rubber gasket TET 26-35

**6381-06 1**: UG-4 pipe 0.6 m with built in fan (Ext 24 V AC required)

**6381-15 1**: UG-4 pipe 1.5 m with built in fan - incl plastic end gasket and rubber gasket TET 26-35 (Ext 24 V AC required)

**6381-28 1**: UG-4 pipe 2.8 m with built in fan - incl plastic end gasket and rubber gasket TET 26-35 (Ext 24 V AC required)

**6382 1**: UG-4 bracket

**6384**: UG-4 filter (10 pieces)

**6385**: UG-4 rubber gasket TET 26-35 (spare part)

1) The UG-4 bracket 6382 is required for the mounting of 6377 when a pipe with fan (6381-xx) is used



## FIRE ALARM SYSTEMS ISOLATOR DETECTOR SERIES



### ANALOG MULTI DETECTOR WITH ISOLATOR 4400I

#### Features

- State of the art detector for highest safety
- Detection by combination of smoke and heat
- Built-in short circuit isolator
- Nuisance alarms reduced by up to 46% by using AI
- A learning function will ensure that the most suitable fire alarm algorithm is always used
- Installation date and automatic service signal

#### Type numbers

**4400I**: Analog multidetector with isolator



### ADDRESSABLE SOUNDER BASE 4479

#### Features

- 3-terminal sounder base for isolator detector
- 7 tones, 90 dB
- Low power mode 84 dB at 1.5 mA in active mode
- Fast connectors for quickest installation available
- Connector for loop, shield, and extra cable pair (e.g 24 V)
- Cable entry from top or side

#### Type numbers

**4479**: Addressable sounder base

**4489**: Ingress protection



### BASE FOR ISOLATOR DETECTOR 4412F

#### Features

- 3-terminal base for isolator detector
- Fast connectors for quickest installation available
- Connector for shield
- Connector for extra cable pair (e.g 24 V)
- Cable entry from top or side
- Recess for label holder

#### Type numbers

**4412F**: Base for isolator detector



### ADDRESSABLE EXTERNAL INDICATOR 4418

#### Features

- Connects to loop
- Advanced mode - Control expression
- Normal mode - Mirrors detector LED
- For wall or flush mounting
- Low power consumption

#### Type numbers

**4418**: Addressable external indicator (LED)

# FIRE SECURITY





## PLANNING, COMMISSIONING, AND INSTALLATION TOOL EBLWin

Modern fire alarm systems are very complex and versatile. To get the optimal performance in the most effective way Panasonic provides EBLWin - a powerful and very easy to use Windows based PC tool for planning, commissioning, and maintenance of both the systems EBL512 G3 and EBL128.

Regardless if you prefer to do all the planning and programming at the office and just download to the system on site, or if you prefer to go onsite and create all the Site Specific Data (SSD) with the help of auto addressing, EBLWin supports both ways of working.

EBLWin's auto addressing function is one of the most powerful and yet easiest to handle. It can be applied on new installations, extensions of existing systems or used when replacing detectors. Simply connect to the fire alarm system and let the SW guide you thru the complete process.

The image displays the EBLWin software interface, which is used for planning, commissioning, and maintenance of fire alarm systems. The main window shows a tree view of the system configuration, including zones, alarm points, and loops. A detailed view of a selected loop (Loop 0) is shown, listing various detectors and their addresses. A table of detector parameters is visible, including fields for 'Alert announcement time channel', 'Dependent time channel', 'Quiet alarm', 'Delayed', 'Algorithm', 'Alternative Algorithm', and 'Alternative Time channel'. A 'Properties for COM-loop' dialog box is open, showing cable length settings and a diagram of the loop configuration. The diagram illustrates a 'Feeder line' and a 'Loop' with distances of 782m and 1354m respectively. The software is branded with the Panasonic logo.

## FIRE ALARM SYSTEMS WEB-SERVER APPLICATIONS


### WEB-SERVER II 1598

#### Features

- Remote presentation of actual EBL status via browser
- Remote operation of an EBL system via encrypted 2-way communication
- Automatically generated e-mail at predetermined events; fire alarm, service signal, fault etc
- Works at gateway to security- and building management
- Mounted on the dedicated DIN rail inside c.i.e

#### Type numbers


**1598:** Web-server II

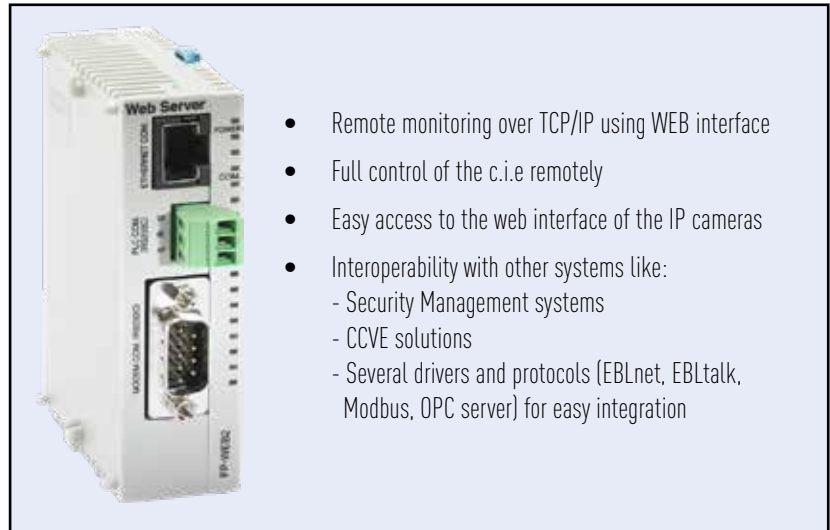

- Remote monitoring over TCP/IP using WEB interface
- Full control of the c.i.e remotely
- Easy access to the web interface of the IP cameras
- Interoperability with other systems like:
  - Security Management systems
  - CCVE solutions
  - Several drivers and protocols (EBLnet, EBLtalk, Modbus, OPC server) for easy integration

### WEB-SERVER AS GATEWAY

Use the Web-server as a gateway to a separate system. Transmit and present information in building management and security systems.

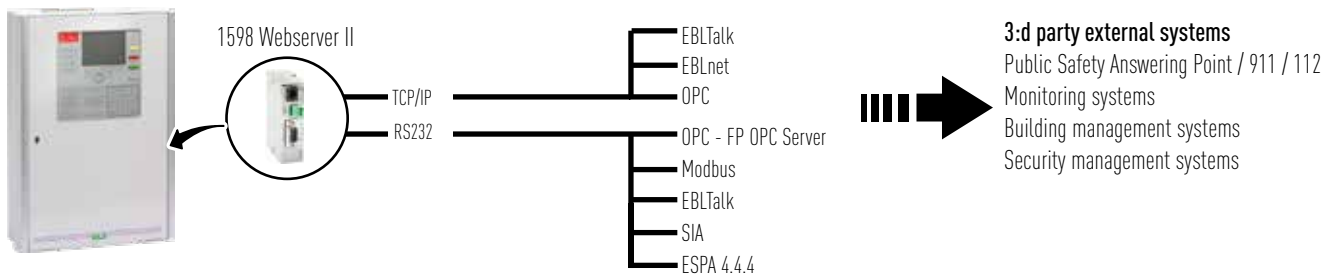

### EBLWEB

EBLWeb will present the current status of the EBL-system remotely, i.e. showing current alarms, faults, disablement, and other deviations corresponding to the EBL CU.

It is possible to check the area with a linked camera.

## EBL GRAPHICS

### Features

- Monitors a complete EBL system
- Report fire alarm, faults, or other deviations
- Possibility to reset fire alarms and acknowledge faults
- Possibility to disable / re-enable single alarm points or zones graphically
- Easy configuration with EBL Graphic Designer
- Supports hierarchial drawing image handling so that the user may monitor the systems on detailed drawings
- Inspect the monitored area with a linked network camera



## EBL WEB MONITOR

### Features

- Monitors several EBLWebs at the same time
- Report fire alarm, faults, or other deviations
- Easy configuration with EBL Monitor Tool
- Opens a website to a specific EBLWeb
- Supports map image handling, so that the user may position the fire alarm systems on a user specified map
- Adapted for usage on PC or tablet




## EBLWEB APP

### Features

- Set a zone in test mode, test the detectors and get a signed report
- Verify the function of all individual outputs in the system
- Test alarm devices
- Activate detector LED to simplify commissioning

## EBL512 G3 FOR LARGER FIRE ALARM SYSTEMS

### System overview:

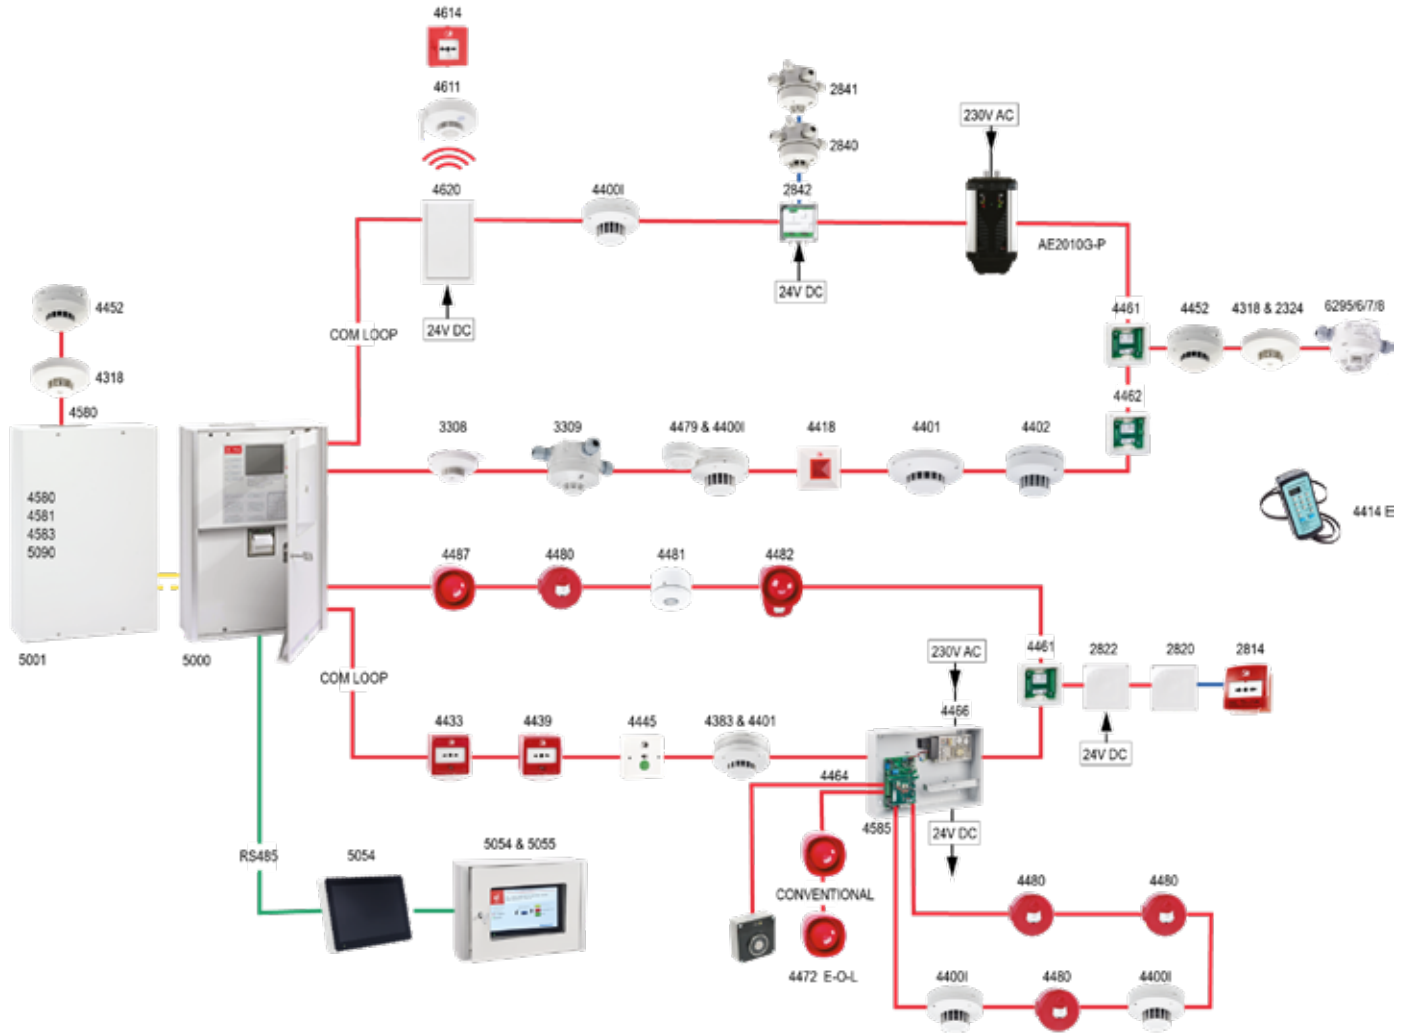


Panasonic fire alarm systems are designed to accommodate both stand alone and large system requirements using different control and indicating units (C.I.E) called control panels. Growing up from a stand alone installation with the EBL512 G3 up to 30,600 devices can be connected through 30 control panels with 4 detector loops each.

# Panasonic

Panasonic has been successfully tested to the highest standards, ensuring high quality and reliable fire alarm solutions.



EN54



05/2020

## Panasonic®

To discover more visit:

<https://panasonic-fire-security.com/>

**Panasonic Life Solutions**  
**Elektrik San. ve Tic. A.Ş.**

Abdurrahmangazi Mah. Ebubekir Cad. No: 44 34887 Sancaktepe  
İstanbul / Türkiye T: +90 (216) 564 55 55 F: +90 (216) 564 55 44  
lstr.panasonic.com

CALL CENTER  
444 8456



EN54

