

## PRODUCT DATASHEET



<b>Product Name :</b>	TV-SAT Socket, Transitive 8 dB
<b>Product Code :</b>	90967086
<b>Product Series :</b>	Karre/Meridian
<b>Technical Specifications:</b>	
<b>Material :</b>	ABS (Acrylonitrile Butadine-Styrene)
<b>Certificates :</b>	CE, WEEE
<b>Colour Options :</b>	White, Beige




### Product Details :

- Suitable for central antenna and CATTV.
- Not affected by the parasite signals coming from the air for shielding feature.
- Ease of assembly thanks to the rear cover with hinge feature.
- Can be used in TV Socket 5-2400 MHz band.
- RG 6 U6 type wire connection is recommended for the image quality.

f/MHz	5-47	47-470	470-862	862-1000	1000-2400	2400
TV Subscriber Loss (dB)	≤ 8	≤ 8	≤ 8	≤ 9	—	—
SAT Subscriber Loss (dB)	≤ 9	≤ 9	≤ 9	≤ 10	≤ 10	≤ 10
Transient Loss (dB)	≤ 3.5					

### Dimensions:

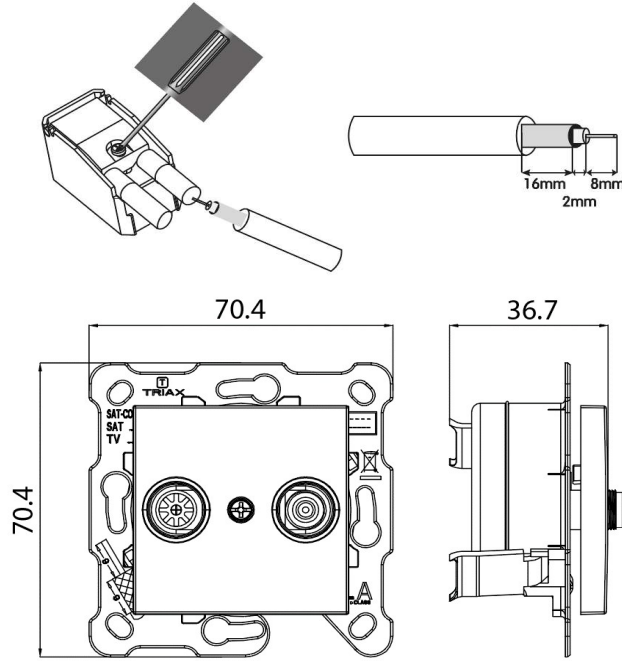

Panasonic Electric Works Elektrik.San. ve Tic. A.Ş.  
 Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44  
 ewtr.panasonic.com