PRODUCT DATASHEET



TV-SAT Socket, Transitive 11 dB					
90440087					
Linnera/Rollina					
•					
ABS (Acrylonitrile Butadine-Styrene)					
White, Beige					
CE, WEEE, PGD, EAC					
	90440087 Linnera/Rollina ABS (Acrylonitrile Butadine-Styrene) White, Beige				




Product Details :

- Suitable for central antenna and CATTV.
- Not affected by the parasite signals coming from the air for shielding feature.
- Ease of assembly thanks to the rear cover with hinge feature.
- Can be used in TV Socket 5-2400 MHz band.
- RG 6 U6 type wire connection is recommended for the image quality.

f/MHz	5-47	47-470	470-862	862-1000	1000-2400	2400	
TV Subscriber Loss (dB)	≤8	≤ 8	≤ 8	≤ 9	_	-	
SAT Subscriber Loss (dB)	≤9	≤9	≤ 9	≤ 10	≤ 10	≤ 10	
Transient Loss (dB)	≤3.5						

Wiring Diagram and Dimensions:

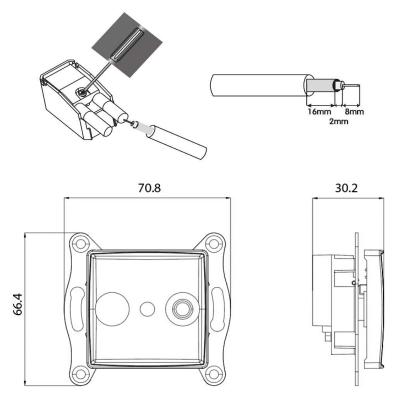

Panasonic Electric Works Elektrik.San. ve Tic. A.Ş.

Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44

ewtr.panasonic.com